


LED STRIPS AND EXTRUSIONS




LED STRIPS



Lumens/ft:
Up to 1159
at 9.0W/ft



Color
Temperature:
1900K-5500K



CRI:
Up to 99



Color:
SW, SW-HE, SW-IA,
DW-HE, SC, RGB,
RGBW, RGBW-HE



Options comply with
Buy American Act



All LED strips have
Declare labels and wet
rated LED strips are
Red List Approved

STATIC WHITE

- 6 diodes per 1" cut point
- 98+ CRI at 3000K
- 1-Bin, 1-Step
- Excellent TM30 performance
- Dry, damp, and wet rated

STATIC WHITE HIGH EFFICACY

- 8 diodes per 2" cut point
- More lumens per watt
- 95+ CRI at 3000K
- 1-Bin, 1-Step
- Dry, damp, and wet rated

STATIC WHITE HIGH EFFICACY PLUS

- 9 diodes per 2" cut point
- More lumens per watt
- 90+ CRI at 3000K
- Dry and wet rated

STATIC WHITE INDIVIDUALLY ADDRESSABLE

- 9 diodes per 2" cut point
- 98+ CRI at 3000K
- Uses DMX and SPI protocols to control nominal 1" segments
- Dry rated

STATIC WHITE EXTREME TEMPERATURE

- 2" cut point
- 90+ CRI at 3000K
- Suitable for saunas and steam rooms
- Wet rated
- Rated temperature range: -40°F to 195°F

STATIC WHITE STANDARD

- 6 diodes per 2" cut point
- 90+ CRI
- Cost effective
- Dry and wet rated

STATIC WHITE DOUBLE ROW

- 8 diodes per .05" cut point
- 98+ CRI at 3000K
- 1-Bin, 1-Step
- Dry rated in OPTI-FLAT

STATIC WHITE DOUBLE ROW HIGH EFFICACY

- 8 diodes per 1" cut point
- 98+ CRI at 3000K
- 1-Bin, 1-Step
- Dry rated in OPTI-FLAT

STATIC COLOR

- 6 diodes per 2" cut point
- Red, green, blue and amber
- FWC Certified in red and amber
- Dry, damp, and wet rated

DYNAMIC WHITE HIGH EFFICACY

- 14 diodes per 2" cut point
- Can either be controlled as Warm Dim or Tunable White
- Dry, damp, and wet rated

RGB

- 7 diodes per 2" cut point
- RGB linear LED strip for color-changing applications
- Dry, damp, and wet rated

RGBW

- 12 diodes per 4" cut point
- 6 diodes for RGB and 6 diodes for static white
- Dry, damp, and wet rated

RGBW HIGH EFFICACY


- 21 diodes per 2" cut point
- 7 diodes for RGB and 14 diodes for static white
- Best solution for diode free applications with a lens
- Dry, damp, and wet rated



EXTRUSIONS





FINISHED EXTRUDED FIXTURE








- Diode-free, UV stable lens options
- Multiple mounting accessories for easy install
- Thermal management and heat dissipation
- Field installed, high-quality anodized aluminum
- Field installation allows for long continuous lines on light
- All extrusions have Declare labels





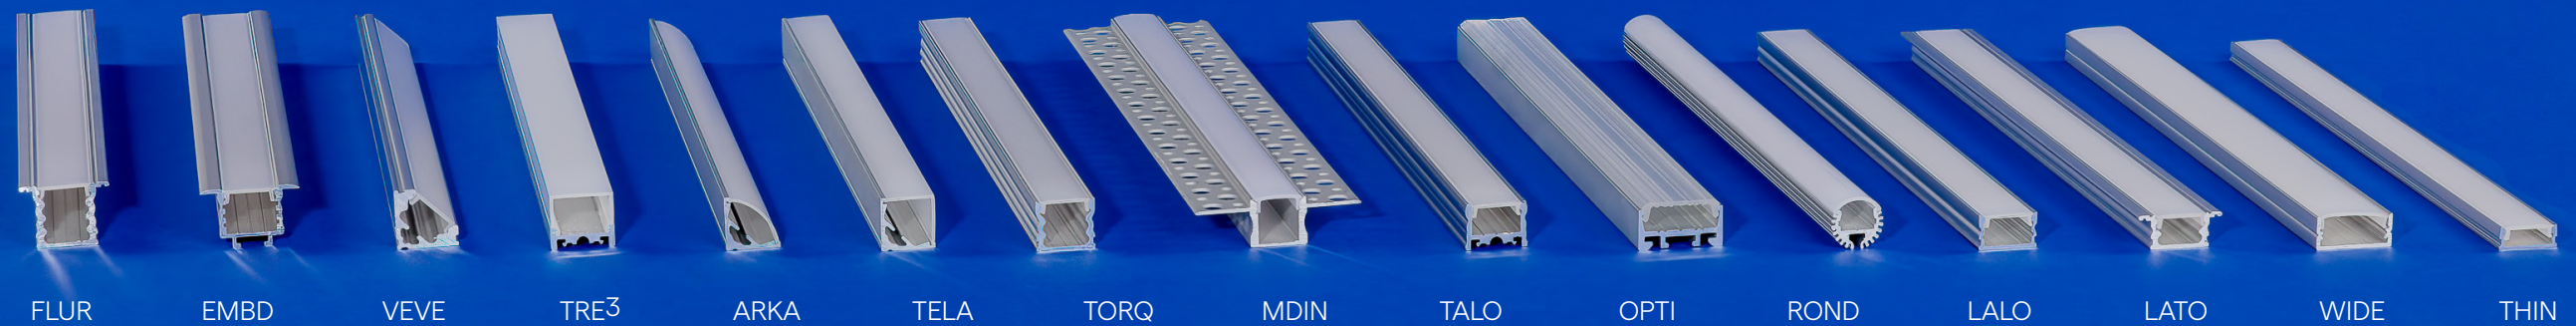






Declare.



ANGLED	FLAT LENS	OPTICAL LENS
VEVE 45° flat lens	 <div>DF FR PR CL</div> <div>.71"W X .71"H100°</div>	 <div>OPTIC</div> <div>.71"W X .71"H20°/45°</div>
ARKA 45° curved lens with optional WhiteOptics (Internal coating greater lumen output)	 <div>DF FR PR CL</div> <div>.63"W X .63"H130°</div>	
TELA Two-side 90° lens with optional WhiteOptics (Internal coating greater lumen output)	 <div>DF FR</div> <div>.63"W X .63"H130°</div>	


SURFACE	FLAT LENS	OPTICAL LENS
TRE3 Three-sided lens for grid ceiling or surface applications	 <div>DF FR</div> <div>.74"W X .68"H136°</div>	
TORQ Surface or recessed profile with optics and optional WhiteOptics	 <div>DF FR PR CL</div> <div>.70"W X .60"H60°/70°</div>	 <div>OPTIC</div> <div>.70"W X .72"H12°/40°</div>
TALO Low profile extrusion with concealed mounting for grid ceiling applications	 <div>DF FR PR CL</div> <div>.74"W X .56"H80°</div>	
ROND Round fixture, can be turned 45° degrees	 <div>DF FR PR CL</div> <div>.62"W X .62"H93°</div>	
OPTI Precision beam control with a range of optics	 <div>DF FR PR</div> <div>1.00"W X .53"H99°-115°</div>	 <div>OPTIC</div> <div>1.0"W X (.54" -.79")H40°/60°/70°/90°/110°/155°180°/ASYM/FT</div>

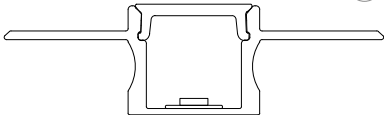RECESSED	FLAT LENS	OPTICAL LENS
FLUR Narrow recessed flanged profile with an optional mounting tray and a clear lens to create a 45°, 60°, or 80° cutoff	 <div>DF FR PR CL</div> <div>1.0"W X .75"H45°/60°/80°</div>	
EMBD Recessed flanged profile designed for drywall installations	 <div>DF FR PR</div> <div>1.14"W X .71"H12°/14°/20°</div>	 <div>OPTIC</div> <div>1.14"W X .83"H30°/45°/60°</div>
MDIN Flush mud-in profile	 <div>DF</div> <div>1.98"W X .58"H117°</div>	
LATO Shallow flanged fixture for recess mounting with optional WhiteOptics (Internal coating greater lumen output)	 <div>DF FR PR CL</div> <div>1.0"W X .41"H100°</div>	

LOW-PROFILE	FLAT LENS	OPTICAL LENS
LALO Low profile extrusion with optional optic	 <div>DF FR PR CL</div> <div>.70"W X .42"H78°</div>	 <div>OPTIC</div> <div>.70"W X .54"H17°</div>
WIDE Broad and low profile can fit up to two rows of LEDs	 <div>DF FR PR CL</div> <div>.90"W X .34"H97°</div>	
THIN Ultra low-profile	 <div>DF FR PR CL</div> <div>.70"W X .28"H109°</div>	

Diagrams shown in actual size


▲ Beam angle


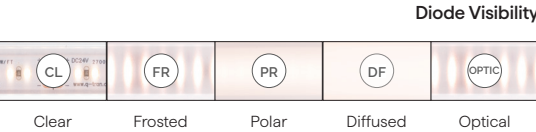




ARKA


ARKA is a 45° angled LED extrusion with a curved lens that produces a wide 130° beam angle for cove lighting applications. It is available in satin, black, and bronze finishes with two mounting hardware options. Lens options include clear, frosted, polar, and diffused. Combine ARKA with WhiteOptics to increase light output between 2-20%.



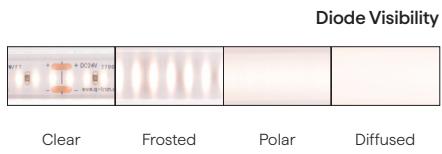


COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

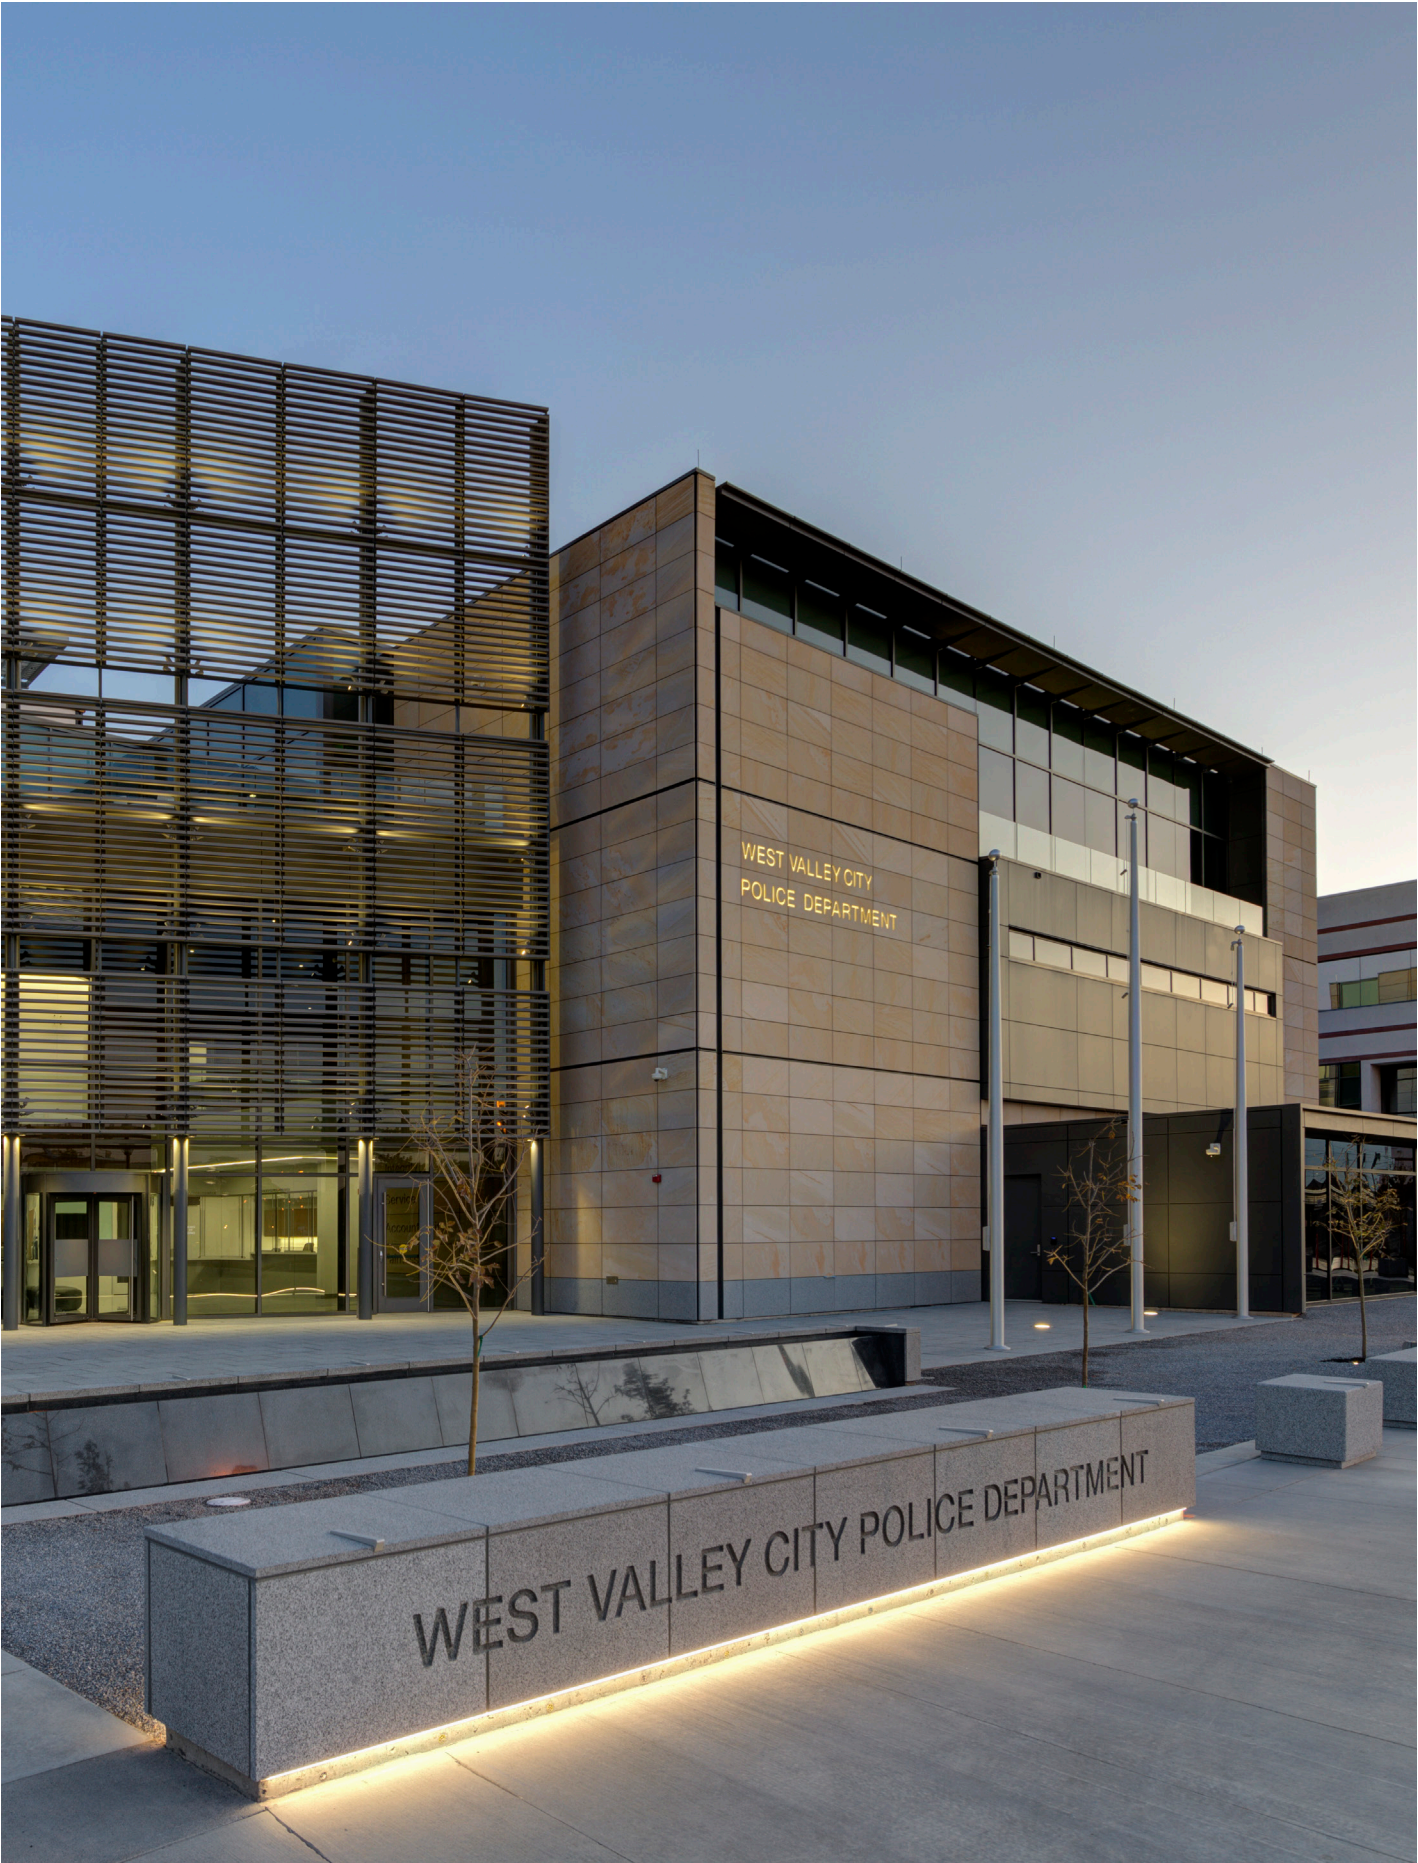


Product shown: ARKA

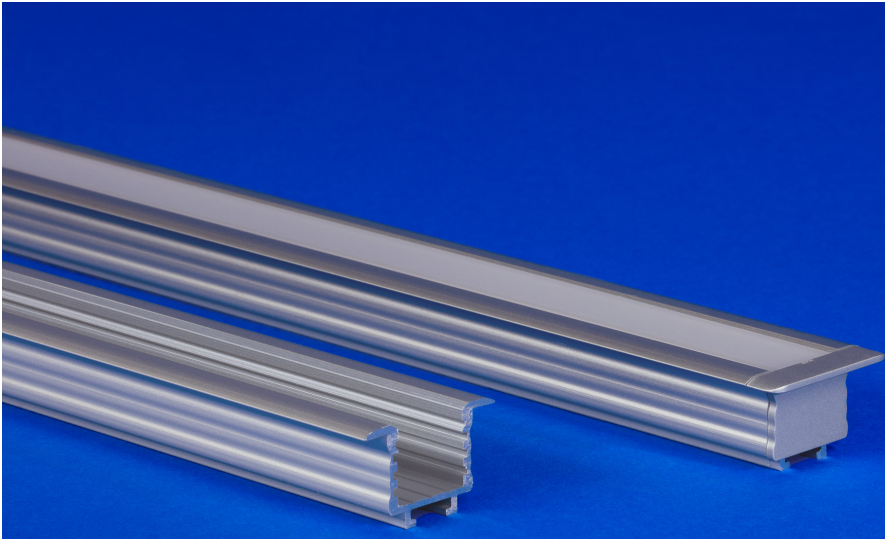

EMBD

EMBD is a recessed mounted aluminum extrusion. It is offered with QTL's standard lens as well as an optical lens option, that when paired with an adjustable tray creates a plethora of light beam angles. EMBD can be mounted with a magnetic bar along with recessable spring clip technology.






FLUR

FLUR is QTL's deepest flanged LED extrusion. Pair with an optional mounting tray and a clear lens for either a 45°, 60°, or 80° cutoff. It is available in satin and black finishes, with clear, frosted, polar, and diffused lens options. Combine with WhiteOptics to increase light output between 5-47%.



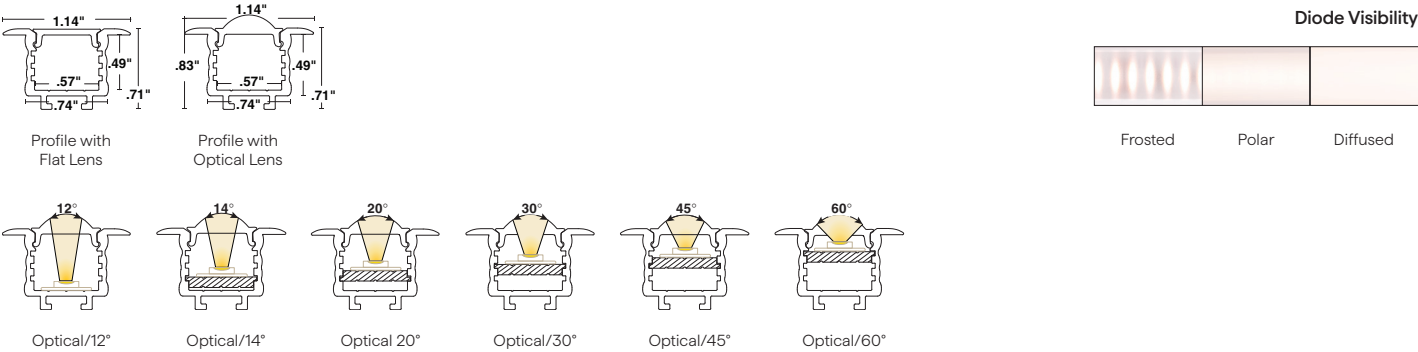

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0, 8.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0						✓ W/FT: 5.0			



LALO

The LALO LED extrusion utilizes a sleek flat lens and a shadowless end cap design. Combined with a stainless steel mounting clip, this mid-low profile extrusion is ideal for lighting indirect and direct surface mount applications. Available in both satin and black finishes with five different lenses: clear, frosted, polar, diffused, and optical.





COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0





Product shown: LALO




TALO

TALO's modern design is complemented by its sleek flat lens and end caps that promote full luminosity. It not only utilizes a hidden stainless steel mounting clip but is also compatible with a plastic T-Bar clip for grid ceiling applications and can be used with LEDs up to 6.0 watts/foot. Available in both satin and black finishes, TALO also offers a range of lens choices including clear, polar, frosted, and diffused options.



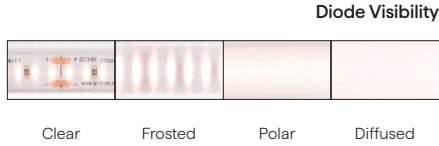



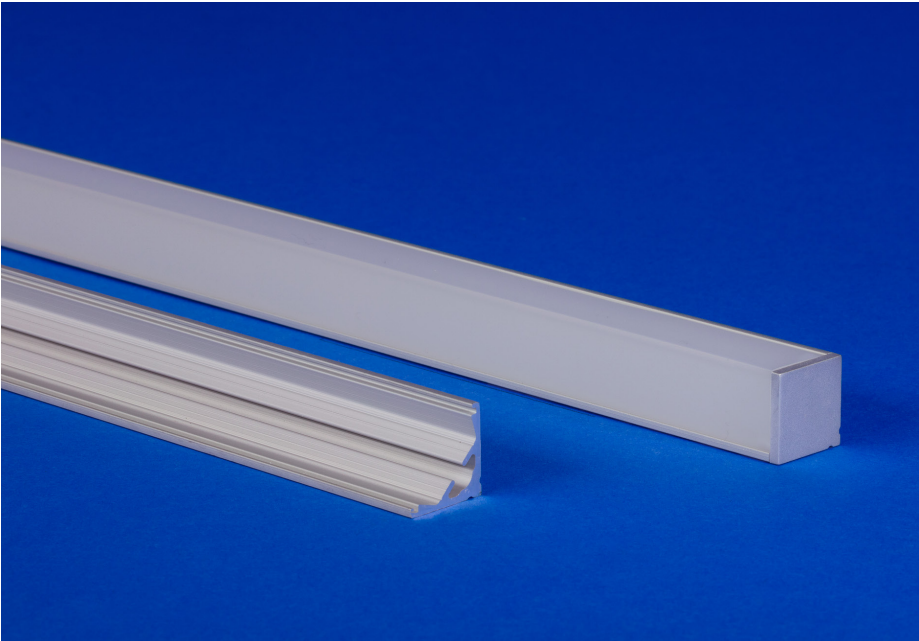

TELA

TELA is a 45° angled LED extrusion with a 90° two-sided lens that provides diode free viewing and sharp cutoff angles. Available in satin, black, and bronze finishes, the TELA extrusion is perfect for under-cabinet applications preventing the light from spilling past the edge of the countertop. Two mounting hardware options and two lens options, frosted and diffused, allow for flexibility. Combine TELA with WhiteOptics to increase light output between 3-15%.





COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0



THIN

The THIN LED extrusion is QTL's smallest extrusion, making it a perfect fit for surface mount applications that require light to be low-profile. With a diffused lens, THIN will provide near diode-free results.








TORQ

Our most popular LED extrusion, the TORQ, is ideal for surface mounted or recessed installations. Pair the TORQ with an optional mounting tray for a 60° & 70° beam angle. TORQ offers a range of finishes including satin, black, and bronze, along with clear, frosted, polar, diffused, and optical lens options. Amplify your light output by 5-52% by seamlessly integrating TORQ with WhiteOptics.



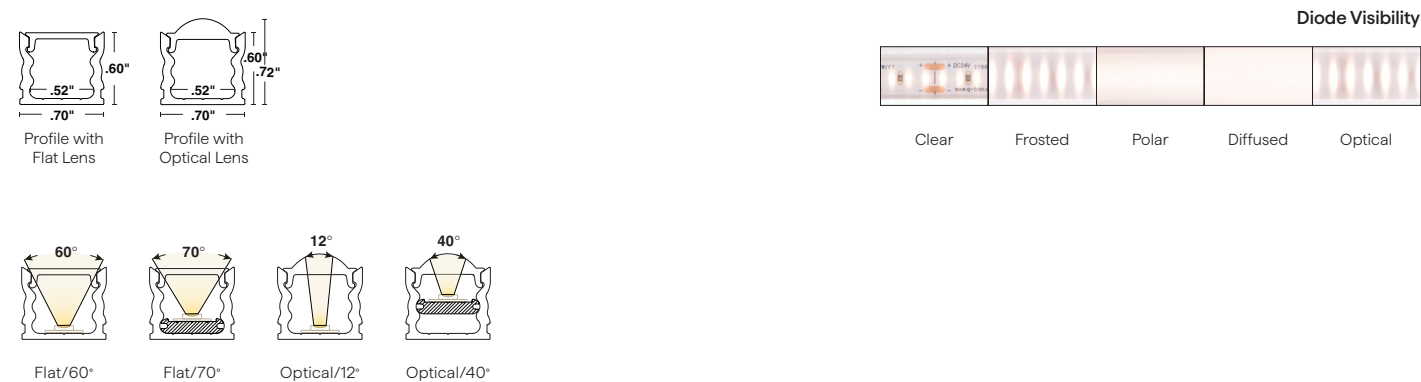

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 5.0			✓ W/FT: 1.5, 3.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0			✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0, 8.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0						✓ W/FT: 5.0			



TRE3

The TRE3 LED extrusion is an impressive solution for grid ceiling applications and surface mount applications because of its unique three-sided lens. This innovative design element creates an illusion of invisibility when illuminated, seamlessly blending the extrusion with the surrounding space. TRE3 provides two expertly designed clips for installation. The discreet stainless steel clip suits surface mounting, while the ceiling-mounted plastic T-Bar clip offers an effortless solution for grid ceilings.







VEVE

The VEVE LED extrusion is designed with a 45° lens that delivers a precise narrow beam cutoff. VEVE takes center stage in applications that call for light to be flush in a corner. Offered in satin, black, and bronze finishes in five different lenses; clear, frosted, polar, diffused, and optical.





COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0			✓ W/FT: 3.0			✓ W/FT: 5.0			


COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0						✓ W/FT: 5.0			



WIDE

The WIDE LED extrusion is QTL's widest profile extrusion, making it able to fit even our widest LEDs: RGBW. It is available in satin, black, and bronze finishes and is offered in three different lenses; clear, polar, and diffused. With a clear lens, its light transmission is 97%.



Diode Visibility

Clear	Frosted	Polar	Diffused

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0



Product shown: WIDE

