# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions

10 YEAR WARRANTY

- 3426-94 Luminaires - Landscape Lighting Systems - Certified to UL - 1838 Standard.
- 3425-95 Luminaires - Low Voltage Lighting Systems - Certified to UL - 2108 Standard.
- 3425-96 Luminaires - Component Hydromassage - Certified to UL - Pool & Spa Standard.

CANADA

- 3426-04 Luminaires - Landscape Lighting Systems - Component (including Hydromassage).
- 3425-15 Luminaires - Low Voltage Lighting Systems.

- For supply connections use wire rated for at least 90°C
- Suitable for in-ground installation
- Use dimmers rated for magnetic low voltage load
- Not for installation to conduit extending directly to an underwater pool light forming shell.
- Use dimmers rated for appropriate lighting load.
- Suitable for use with submersible luminaires
- Suitable for indoor & outdoor use
- Warning: risk of fire - if installation involves running wiring through a building structure, special wiring methods are needed. Consult National and Local Codes.

## Q-SET LOW VOLTAGE LUMINAIRE POWER SUPPLY

| MODEL NUMBER | OUTPUT CLASS | MAX LAMP LOAD | PRIMARY VOLTS | LAMP VOLTS | DIMMER RATING | SEC. 12V | BREAKERS 24V |
|---|---|---|---|---|---|---|---|
| QSET-60 | CLASS 1 | 60W | 120V/277 (60Hz) | 12V/24V | MLV | 1x5 | 1X2.5 |
| QSET-120 | CLASS 1 | 120W | 120V/277 (60Hz) | 12V/24V | MLV | 1x10 | 1x5 |
| QSET-180 | CLASS 1 | 180W | 120V/277 (60Hz) | 12V/24V | MLV | 1X15 | 1X7.5 |
| QSET-240 | CLASS 1 | 240W | 120V/277 (60Hz) | 12V/24V | MLV | 1X20 | 1X10 |
| QSET-300 | CLASS 1 | 300W | 120V/277 (60Hz) | 12V/24V | MLV | 1X25 | 1X12.5 |
| QSET-360 | CLASS 1 | 360W | 120V/277 (60Hz) | 12V/24V | MLV | 2X15 | 2X7.5 |
| QSET-480 | CLASS 1 | 480W | 120V/277 (60Hz) | 12V/24V | MLV | 2X20 | 2X10 |
| QSET-600 | CLASS 1 | 600W | 120V/277 (60Hz) | 12V/24V | MLV | 2X25 | 2X12.5 |
| QSET-540 | CLASS 1 | 540W | 120V/277 (60Hz) | 12V/24V | MLV | 3X15 | 3X7.5 |
| QSET-720 | CLASS 1 | 720W | 120V/277 (60Hz) | 12V/24V | MLV | 3X20 | 3X10 |
| QSET-900 | CLASS 1 | 900W | 120V/277 (60Hz) | 12V/24V | MLV | 3X25 | 3X12.5 |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions

## CSA LISTING

**OUTDOOR** Under 15 Volts = LV Wire Burried 0" to 6"

**Outdoor Landscape Lighting - Under 15 Volts**

CSA Certified for both the U.S. and Canada to the UL-1838 Standard for Landscape Lighting with in-ground enclosure and component power supply operating at less than 15V. This listing allows for the LV Q-WIRE to be installed 0" to 6" underground.

**Pool & Spa - Under 15 Volts**

CSA Certified for the U.S. to the UL-Pool & Spa Power Supply Standard. This listing is intended for power supplies used to power fountain, swimming pool and spa luminaires operating at less than 15V.

QSET-180
QSET-240
QSET-300
QSET-360
QSET-480
QSET-600
QSET-540
QSET-720
QSET-900

**OUTDOOR** 15 to 30 Volts = LV Wire burried 18"

**Outdoor Landscape Lighting - 15 to 30 Volts**

CSA Certified for both the U.S. and Canada to UL-2108 Standard with a listing of "Low Voltage Luminaire Power Supply" for lamps operating at 12 or 24 volts where the secondary voltage is between 15 to 30 volts. Please note that the secondary wiring must be installed 18" below grade per the N.E.C.

**INDOOR** LV Lighting under 30 Volts

**Indoor Open Conductor Systems - Under 30V**

CSA Certified for both the U.S. and Canada to UL-2108 Standard as a "Low Voltage Luminaire Power Supply" for lamps operating at 12V or 24V allows for live conductor lighting equipment mounted above 7 feet and other types of LV Lighting equipment, per N.E.C. Article 411. When tested in conjunction with open conductor lighting system.

**NOTE:** Refer to the last page.

## Q-VAULT 120V (60HZ) - 12V

**FOR CONDUIT CONNECTION**

WARNING - RISK OF SHOCK. Install power unit 5 feet (1.5 m) or more from the pool or spa and 10 feet (3.05 m) or more from a fountain. Where the power unit is installed within 10 feet (3.05 m) of a pool or spa, connect unit to GFCI protected branch circuit.

**FOR POWER SUPPLY CORD CONNECTION**

WARNING - RISK OF SHOCK. Installed power unit 5 feet (1.5M) or more from the pool, spa, or fountain. Where the power unit is installed (a) indoors within 10 feet (3.05) of a pool, spa, or fountain or (B) outdoors, connect power unit to a receptacle protected by a GFCI.

WARNING - RISK OF FIRE. If installation requires running wire through a building structure, special wiring methods are needed. Contact a qualified electrician.

WARNING - Do not use extension cords.

The main Secondary Wiring is intended for shallow burial - less than 6 inches (152 mm)

**For Supply connections use wire rated for at least 60C.**

- SUITABLE FOR INDOOR / OUTDOOR USE
- SUITABLE FOR USE WITH SUBMERSIBLE LUMINAIRES OR SUBMERSIBLE PUMPS
- SUITABLE FOR USE WITH LOW VOLTAGE LANDSCAPE LUMINAIRES / FITTINGS

## Q-VAULT 277V (60HZ) - 12V (US Only)

WARNING - RISK OF SHOCK. Install power unit 5 feet (1.5 m) or more from the pool or spa and 10 feet (3.05 m) or more from a fountain. Where the power unit is installed within 10 feet (3.05 m) of a pool or spa, connect unit to GFCI protected branch circuit.

WARNING - Outdoor Cord-connected unit shall be connected to a GFCI protected hooded flush type cover plate recepticle marked "Wet Location

The main Secondary Wiring is intended for shallow burial - less than 6 inches (152 mm)

**For Supply connections use wire rated for at least 60C.**

- SUITABLE FOR INDOOR / OUTDOOR USE
- SUITABLE FOR USE WITH SUBMERSIBLE LUMINAIRES OR SUBMERSIBLE PUMPS
- SUITABLE FOR USE WITH LOW VOLTAGE LANDSCAPE LUMINAIRES / FITTINGS

CONTACT YOUR LOCAL DISTRIBUTOR OR QTL FOR Q-WIRE, Q-CLIK OR PROPER ACCESSORY KITS.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions


## ROUGH IN WIRING

1. Excavate a 14" x 30" x 16" deep hole for the Q-VAULT direct burial housing.
2. Dig trenches for primary & secondary wiring to Q-VAULT housing location.
3. Place drain pipe at a 30 degree angle at the lowest slope of land for proper drainage. Fill bottom of pit with a minimum of 4" of gravel.

   SEE DIAGRAM A

**Note:** Increase width to 30" x 30" when stabilizing bars are used.

**1-3**
DIAGRAM **A**

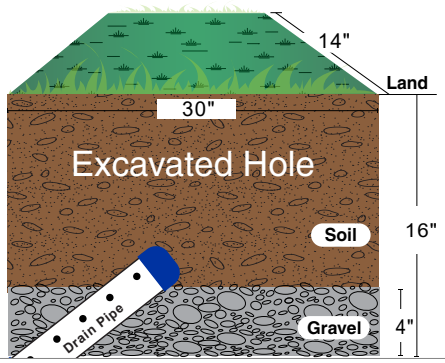


4. Bring all primary and secondary wiring into housing.

   **A:** Entry location is provided at both the bottom and side of the Junction Box located on the Q-VAULT housing.


   **B:** On the bottom of Junction Box there are: (4) 3/4" NPT and (2) 1/2" NPT KO's. SEE DIAGRAM B

   **C:** Using the Field Drill Guide Labels provided in the installation kit you are able to drill for various fitting sizes. Only knock out openings for conduits being utilized in installation. SEE DIAGRAM C
5. After all field wiring has been installed with proper lead lengths, tighten all fittings properly to assure they are water proof. All drilled entries require Q Click wire connectors to insure water tight connection. Use of other connectors voids warranty.
6. Coil and store field wiring in Junction Box area.

**Note:** Label all wiring for future reference.

| Knock Outs (in) | NPT KO's |
|---|---|
| 1/2" | 2 |
| 3/4" | 4 |

**4-6**
DIAGRAM **B**



Bottom View

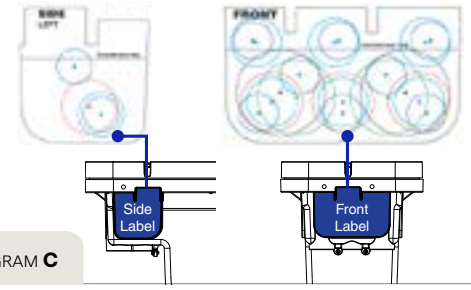



DIAGRAM **C**

**1/2" Fittings**
- Front: 8 max
- Side: 2 per side max

**3/4" Fittings**
- Front: 6 max
- Side: 1 per side max

**1" Fittings**
- Front: 3 max
- Side: 1 per side max

**1-1/4" Fittings**
- Front: 2 max

## FOR COMPLETE WATER TIGHT GUARANTEE

### PRIMARY WIRING IN (120-277V)

**Conduit – Use Installation Kit**
- Step 1: Putty
- Step 2: Epoxy
- Step 3: Syringe

**Non-conduit - use Q-CLIK NPT.75, Q.750-1E, Q-WIRE 12/2+GND**

WARRANTY IS VOID IF THE CORRECT METHOD IS NOT USED.

### SECONDARY WIRING OUT (12-24V)

**Low voltage wire (non-conduit)**
- Q-CLIK
  - NPT-or knock outs in bottom of Q-VAULT, .5-.75
  - MST to drill into the side of the housing, .5-1.25
- Q-WIRE low voltage marine grade UFB wire (recommended) 10-14AWG
  - Standard Q-CLIK insert

**Conduit – low voltage, requires Seal Kit (sold separately)**
- Step 1: Putty
- Step 2: Epoxy
- Step 3: Syringe

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-10-15-26


# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions


**7** Clean debris from the top perimeter and install gasket. SEE DIAGRAM D

**8** Install door and tighten the 6 door bolts in the number sequence shown. SEE DIAGRAM E

**Note:** Nut driver can be used to get bolts seated before final tightening. Proper door bolt tightening must be done with a ratchet wrench using a 3/8" socket at a maximum torque of 50 in-lbs.




**7** DIAGRAM **D**





**8** DIAGRAM **E**

Top View of Q-VAULT housing door. Maximum torque 50 in-lbs.

*Gasket only fits one way. Gasket easily slides over Q-VAULT posts. If you are having to force the gasket, it is backwards (Gasket must sit on top of Q-VAULT. No portion should be overhanging).

**9** Attach the provided Support Bars to the Q-VAULT housing using the 6-32 X 5/8 screws. SEE DIAGRAM F

*OPTIONAL: Concrete Pour Ring Nut & Bolt Installation. SEE DIAGRAM G

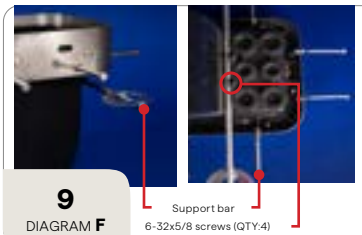


**9** DIAGRAM **F**


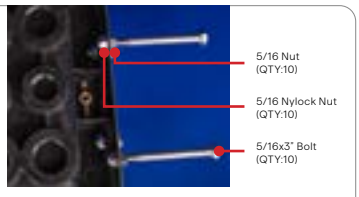



DIAGRAM **G**

**10** Level housing and fill hole with gravel to 4" of below grade. Add soil to surface. SEE DIAGRAM H

All wire entry/exits other than conduit entries MUST use Q-CLIK connectors. Failure to use them will void warranty.

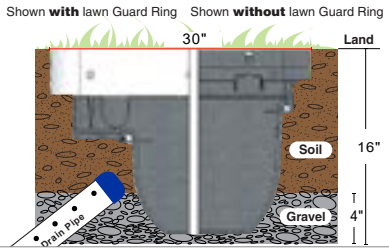



**10** DIAGRAM **H**

**11** Remove cover if installed, be sure to store cover and cover gasket in a clean and dry location.

**12** Move field wiring out of the way.

**13** Place Q-SET low voltage luminaire power supply cassette into the Q-VAULT housing using the support flaps. The cassette's primary junction box should be placed next to field wiring junction box located on the housing. SEE DIAGRAM I




**11-13** DIAGRAM **I**

ISO View

**14** **Landscape Lighting:** Landscape Lighting: Bring primary field wiring directly into the Cassette's primary junction box through open hole.


**Pool & Spa:** Bring primary field wiring through the P&S sleeving. Do not screw base fitting to field junction box until re-enterable potting is complete. SEE DIAGRAM J
Call QTL (203-367-8777) if P&S sleeving is needed.

**Primary Connections:**
- Ground to Green terminal
- Neutral to White terminal
- Hot to either: Tap1 - No Dimmer / Tap2 - With Dimmer

**A:** For proper connection to terminal block, use the Strip Length Guide on the primary junction box cover of the Cassette. Determine the strip length approximately 1".

**B:** Using supplied hex key unscrew wire(s) and hand tighten the (2)1/4-28 316ss set screws.

**C:** Fully insert the properly stripped wire(s) and hand tighten both set screws with provided hex key. Do Not use a ratchet wrench. Maximum torque = 30 in-lbs. SEE DIAGRAM K




**14** DIAGRAM **J**

TOP View





DIAGRAM **K**

TOP View

**Note:** See page 7 for re-enterable potting steps.

**Terminal Capacity**

Solid or Stranded
7 - #14 AWG Wires
5 - #12 AWG Wires
4 - #10 AWG Wires
2 - #8 AWG Wires


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# Q-VAULT-5-Q-SET


LED Power Supply Direct Burial Installation Instructions

## HOUSING


**HOUSING DOOR:** Underside View




| Fits | 1 | Up to 2 |
|---|---|---|
| Q-SET-1 | | • |
| Q-SET-2 | • | |
| Q-SET-3 | • | |




| Knock Outs (in) | NPT KO's |
|---|---|
| 1/2" | 2 |
| 3/4" | 4 |




Bottom View

**HOUSING:** Outside View

Hole Drill Guide Label: Refer to sticker instructions

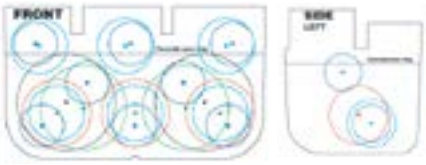

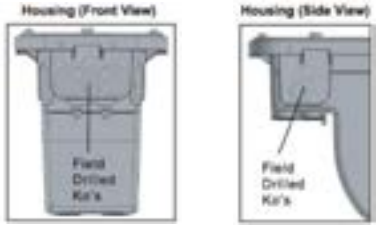

**NPT** National Pipe Taper (Conduit Entries)

**MST** Machine Screw Thread (Housing Entries)


For Field Drilled KO's



**Q-CLIK inserts**

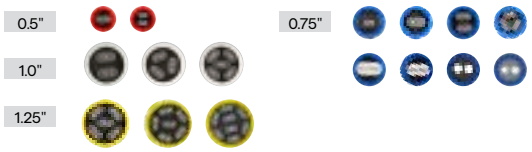



## INSTALLING Q-SET 1, 2, 3

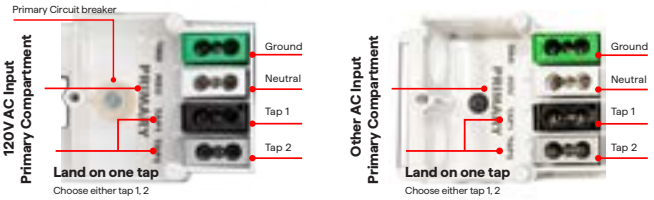


All other AC input voltages

**Q-SET-1, 2, 3** compartment

**Note:** Dimmer, if used, must be a magnetic low-voltage dimmer.

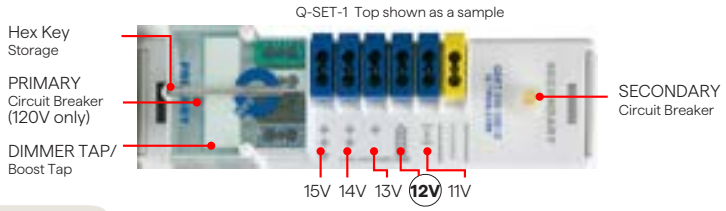



**Q-SET-1, 2, 3** compartment

**NOTE:** Always put your wire on the start & move to the next tap if more Volts are needed

**Q-SET 1** (2.5"Cassette)

Support flaps for easy access while wiring.

**QVAULT-5** (5.0"Housing)



Q-SET Sold separately




**15** Determine proper lengths and trim to correct length.

**16** Low Voltage Common: Is connected to a yellow terminal block which is internally wired to a secondary breaker.

**17** Low Voltage Line: Is connected to 1 of the 5 taps.

**Note:** Unless the proper tap is known, always connect to the terminal marked START. For multiple secondary runs repeat steps.

**Note:** Assemble Part Q-Vault only with part

- QSET-900/ -750/ -720/ -600/ -540/ -480/ -360/ -300/ -240/ -180/ -120/ -60

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-10-15-26

# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions

## SIMPLE AS 1, 2, 3

1. Use putty provided to seal wires in potting well. It is important that the well is liquid tight so that when the re-enterable epoxy is poured, it does not escape out the bottom. Be sure the putty is put into the very bottom of the well to allow ample room for the epoxy. SEE DIAGRAM O

2. **A:** The 3M-8882 re-enterable epoxy takes several hours to set. When set it will form a into a water tight "jello" consistency.

   **B:** Mix the two part epoxy together per 3M instructions located on the epoxy packaging.

   **C:** Push all the mixed epoxy together to one end of the bag. Cut the corner of the bag.

3. **A:** Using the syringe pull the mixed epoxy into the syringe by pulling the plunger out slowly.

   **B:** Slowly dispense the mixed epoxy from the syringe into the utilized potting wells. SEE DIAGRAM P

**Note:** Potting is now complete

## LAST STEP


Final Door Installation

**Gasket and door installed only in one direction**


- Clean housing area where door gasket will rest
- Reinstall clean door gasket.

Before Door is Installed


Put velcro desiccant bag in place. Attach the two velcro loop coins on the desiccant bag to the two velcro hook coins on the underside of the housing door. SEE DIAGRAM Q

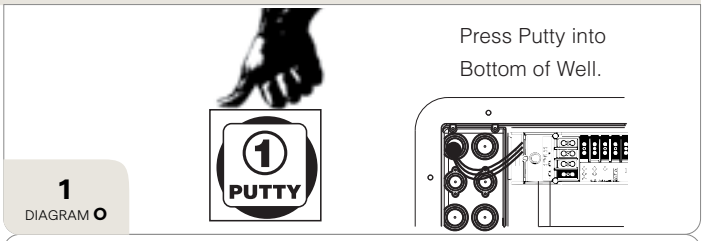


1
DIAGRAM **O**

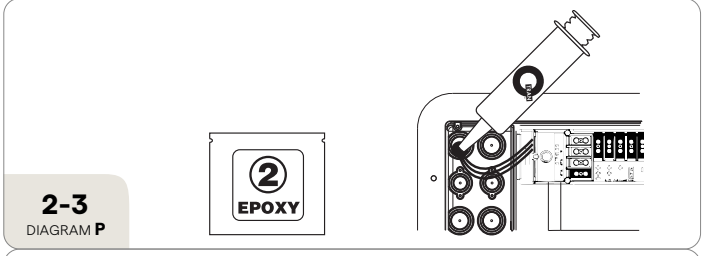


2-3
DIAGRAM **P**

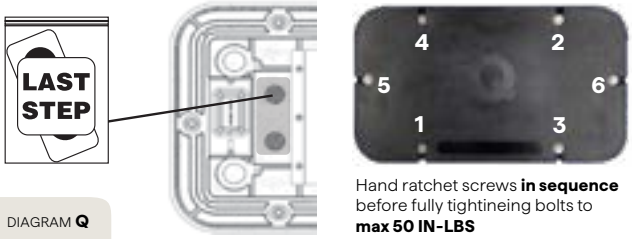


Hand ratchet screws **in sequence** before fully tightineing bolts to **max 50 IN-LBS**

DIAGRAM **Q**

**Note:** Install door and tighten the 6 door bolts **NOT TO EXCEED 50 IN-LBS**. Door bolt tightening must be done with a ratchet wrench using a 3/8" socket.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions

## NEC CODE & UL STANDARDS FOR LIGHTING

Systems Operating at 30 Volts or Less

READ ACROSS & DOWN

| SECONDARY WIRE & BURIAL DEPTH | MAX VOLTS | UL- NEC | LUMINAIRE LISTING | POWER SUPPLY TRANSFORMER |
|---|---|---|---|---|
| Wire Type & Burial Depth: 6"+ Conduit / UF-B (Q-Wire); 0-6" UF-B (Q-Wire) / L.V.Cable; Grade: Wire to Class 1 NEC - Chapter 3; 6" Below Grade: UF-B Underground Feeder - Burial | Max Secondary Volt at Power Supply with no load (Open Circuit). | **NEC** = National Electric Code NFPA-70<br>**UL** = Underwriters Labo-ratories Inc. | Article 411.3 (B-2) Listed NEC - 2008<br>Grounded Isolation for LV Wet Location<br>Secondary Circuit Protector 25A Max<br>Open / Bare Conductor (When Tested) | |
| ∞ ∞ ∞ ∞ | 15V AC / 30V DC | UL 1838 NEC Annex A | Low Voltage Landscape Lighting Luminaires | |
| ∞ ∞ ∞ | 15V AC Only | UL Pool & Spa NEC 680 | Low Voltage Pool & Spa Luminaires | |
| ∞ ∞ | 30V AC / 30V DC | UL 2108 NEC 411 NEC Annex A | Low Voltage Lighting Luminaires | |
| ∞ ∞ | 30V AC / 30V DC | UL 1598 NEC 410 | Luminaires | |

**Wet** (120V Only)

**UL 1838 - LV Landscape Lighting System: 15V AC / 30V DC Max Output at Power Supply - No Load**
Luminaires + Power Supplies must be UL 1838 Listed as complimentary components for lighting garden, walkway, patio areas, trees and similar outdoor locations with in ground and above ground fixtures; and for certain indoor locations such as atriums and shopping malls. This listing also covers luminaires submersed in or floating on ponds, rivers, water features and lakes or a portable self contained fountains per NEC Article 682 where immersed persons would not be present as defined by luminaire installation instructions.
∞∞ UL 1838 allows LV Underground Lighting Cable - no other listing permits this wire type. 120V Primary only. **Not for indoor use.**
**Note:** NEC Annex A = UL 1838

**Low Voltage Luminaire Primarily for Wet Locations**

**Submersed** (120V Only)

**UL Pool & Spa Listing: 15V AC only Max Output at Power Supply - No Load** **Indoor & Outdoor**
Luminaires 4 Power Supplies must be UL Pool & Spa Listed as complimentary components for lighting a Pool, Spa, permanent fountain or other bodies of water intended to contain immersed persons. All wiring must be Class 1 per NEC Chapter 3. 120V Primary only.
Install per NEC Article 680

**Low Voltage Luminaire for Submersed Locations with immersed persons**

**Dry or Damp**

**UL 2108 - LV Lighting System: 30V AC / 30V DC Max Output at Power Supply - No load**
Luminaires + Power Supplies must be UL 2108 Listed as complimentary components. This Standard covers:
**4113 (A) Listed Systems** for exposed bare conductor systems comprised of cable, linear track or the like where the support structure is exposed and current carrying; here the Power Supply must be listed as part of the same identified lighting systems.
**Note:** Use Power Supply as defined in Luminaire installation instructions.

**4113 (B) Assembly of Listed Parts** covers mono, dual or multi point L.V Luminaires which are an assembly of listed parts if a UL 2108 Low Voltage Luminaire Power Supply is utilized. For wet Location luminaires UL 2108 covers luminaires with up to 30 volt input provided they are Class I wired per NEC Chapter 3. For wet Location luminaires with inputs not exceeding 15 volts, UL 1838 applies.
**Note:** NEC Article 411 + Annex A = UL 2108.

**Low Voltage Luminaire Primarily for Dry and Damp Locations**

**Obsolete for LV Remote Dry, Damp & Wet**

**UL 1598 - Luminaires: 30V AC / 30V DC Max Output at Power Supply - No load**
This UL Standard applies to line voltage luminaires for use in non- hazardous locations and allows up to 600 volts input and all wiring must be Class 1 per NEC Chapter 3. Low Voltage luminaires powered by remote transformer are **NOT covered by this standard.**

**This Listing does not cover:**
- LV Landscape Lighting products and Submersible Luminaires installed in the United States at 15V or less. (UL 1838 is the Standard per NEC-Annex A)
- Swimming Pool & Spa Luminaires (UL Pool & Spa is the Standard per NEC Article 680)
- Low Voltage Lighting Systems powered by remote transformers (UL 2108 is the Standard per NEC 411 & Annex A)

**Note:** NEC Article 410

**Intended for Line Voltage Luminaires for Dry, Damp and Wet Locations**

**UL 506-General Purpose or Specialty Transformers: 600V Max**
This UL Standard is a transformer standard only and is not a complimentary component to any luminaire standard. UL 1838, Pool & Spa and 2108 does not permit the use of UL 506 transformers unless the transformer is additionally tested and subsequently listed to UL 1838, Pool & Spa or 2108. A UL-506 transformer may be tested as an internal components to a UL-1598 luminaire, to be an integral transformer.
The Scope of UL-506 (Section 1.2) specifically excludes use in Landscape Lighting Systems and for use in Pool & Spa Lighting Systems. Additionally, a Cord and Plug connection is not permitted. In no instance can a UL-506 transformer be used in Landscape or Pool & Spa Lighting. A UL 1838, UL Pool Spa and UL 2108 Power Supply may power a UL-1598 luminaire that was listed prior to the UL-2108 effective date since these Luminaires are required to be Class 1 wired per NEC Chapter 3.

**General Purpose Transformer**

| POWER SUPPLY TRANSFORMER | | | |
|---|---|---|---|
| T | PS | PS | PS |
| UL 506 General Purpose or Specialty Transformer 600 MAX Transformer 300 MAX low voltage | UL 2108 NEC 411 NEC Annex A Low Voltage Luminaires Power Supply Output at power supply with no load 30V AC/30DC MAX | UL Pool & Spa NEC 680 Low Voltage Pool & Spa Power Supply Output at power supply with no load 15 AC only MAX | UL 1838 NEC Annex A Low Voltage Landscape Lighting Power Supply Output at power supply with no load 15V AC/30DC MAX |

Power Supply

**Key**

| Conduit (Q-CLIK) | UF-B (Q-WIRE) | L.V. Cable | Exceeds Standard | Complimentary Component |
|---|---|---|---|---|
| Yes | No | Optional | Transformer | Power Supply |

The UL limit of 15 volts AC at the Power Supply under no load (Open Circuit) was established for life safety due to shock potential in wet conditions. The Standard also requires a grounded isolation barrier between the primary and secondary windings. In the Pool & Spa Standard the primary must be 120V & the connection must be in a separate junction box or compartment.

| | | |
|---|---|---|
| Q-SET = 3 UL Listings | UL 1838 UL 2108 UL Pool & Spa | |
| Q-HEX = 2 UL Listings | UL 1838 UL 2108 | |
| QOM = 1 UL Listings | UL 1838 | |

©COPYRIGHT QTL 2026

# Q-VAULT-5-Q-SET

LED Power Supply Direct Burial Installation Instructions

## QVAULT-5 USE ONLY WITH QTL Q-SET POWER SUPPLY

| | MODEL NUMBER | MAX LAMP LOAD | AVAILABLE PRIMARY VOLTAGES | | | LAMP VOLTS | SEC. CIRCUIT BKR. & SIZE | |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | 12V AC | 24V AC |
| | | | A B C 1 2 | A B 2 | CE ONLY | | A B C 1 2 | B 2 |
| Magnetic AC | QSET-60 | 60W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 1x5A | 1x5A |
| | QSET-120 | 120W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 1x10A | 1x5A |
| | QSET-180 | 180W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 1x15A | 1x10A |
| | QSET-240 | 240W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 1x20A | 1x10A |
| | QSET-300 | 300W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 1x25A | 1x12.5A |
| | QSET-360 | 360W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 2x15A | 2x10A |
| | QSET-480 | 480W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 2x20A | 2x10A |
| | QSET-600 | 600W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 2x25A | 2x12.5A |
| | QSET-540 | 540W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 3x15A | 3x10A |
| | QSET-720 | 720W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 3x20A | 3x10A |
| | QSET-900 | 900W | 120V (60 Hz) | 277V (60 Hz) | 230V (50 Hz) | 12V / 24V | 3x25A | 3x12.5A |
| | | | | | | | 12V DC | 24V DC |

IP68 RATED

C US 239924

A 3426-94 Luminaires - Landscape Lighting Systems - **Certified to UL - 1838 Standard.**
B 3425-95 Luminaires - Low Voltage Lighting Systems - **Certified to UL - 2108 Standard.**
C 3425-96 Luminaires - Component Hydromassage - **Certified to UL - Pool & Spa Standard.**

1 3426-04 Luminaires - Landscape Lighting Systems - Component (including Hydromassage).
2 3425-15 Luminaires - Low Voltage Lighting Systems.

A B C 1 2 **INDEPENDENT 0-10V DIMMER, MLV/ELV DIMMER, DMX CONTROL OR DALI CONTROL**

A B C 1 2 **FOR SUPPLY CONNECTIONS USE WIRE RATED FOR AT LEAST 90°C**
POUR LES CONNEXIONS D'ALIMENTATION, UTILISEZ UN FIL ÉVALUÉ À 90°C AU MOINS

A B C 1 2 **FOR IN-GROUND INSTALLATION ONLY**
POUR INSTALLATION AU SOL UNIQUEMENT

C 1 **NOT FOR INSTALLATION TO A CONDUIT EXTENDING DIRECTLY TO AN UNDERWATER POOL LIGHT FORMING SHELL**
NE PAS INSTALLER SUR UN CONDUIT S'ETENDANT DIRECTEMENT SUR UN ENVELOPPE DE LUMIERE DE PISCINE SOUS L'EAU

C 1 **PRIMARY TERMINAL MARKED WITH IDENTIFICATION MARKINGS BLACK FOR LINE, WHITE FOR NEUTRAL, GREEN FOR GROUND**
BORNE PRIMAIRE MARQUÉE AVEC DES MARQUAGES D'IDENTIFICATION NOIR POUR LA LIGNE, BLANC POUR LE NEUTRE, VERT POUR LA TERRE

**USE DIMMERS RATED FOR ELECTRONIC OR MAGNETIC LOW VOLTAGE LOAD IF THE POWER UNIT IS ELECTRONIC OR MAGNETIC**
UTILISEZ DES GRADATEURS CONÇUS POUR UNE CHARGE ÉLECTRONIQUE OU MAGNÉTIQUE À BASSE TENSION SI L'UNITÉ D'ALIMENTATION EST ÉLECTRONIQUE OU MAGNÉTIQUE

A B C 1 2 **SUITABLE FOR USE WITH SUBMERSIBLE LUMINARIES**
ADAPTÉ AUX LUMINAIRES SUBMERSIBLES

A B C 1 2 **SUITABLE FOR INDOOR & OUTDOOR USE**
ADAPTÉ À L'USAGE INTÉRIEUR ET EXTÉRIEUR

A B C 1 2 **SUITABLE FOR WET LOCATIONS**
ADAPTÉ AUX ENDROITS HUMIDES

A B C 1 2 **WARNING: RISK OF FIRE - IF INSTALLATION INVOLVES RUNNING WIRING THROUGH A BUILDING STRUCTURE, SPECIAL WIRING METHODS ARE NEEDED. CONSULT A QUALIFIED ELECTRICIAN.**
AVERTISSEMENT: RISQUE D'INCENDIE - SI L'INSTALLATION IMPLIQUE DE RACCORDER UN CÂBLAGE À TRAVERS UNE STRUCTURE DE BÂTIMENT, DES PROCÉDÉS DE CÂBLAGE SPÉCIAUX SONT NÉCESSAIRES. CONSULTER UN ÉLECTRICIEN QUALIFIÉ.

READ INSTALLATION INSTRUCTIONS www.QTL.lighting, MILFORD, CT U.S.A. QTL.lighting

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting