PERI

QUICK REFERENCE



QTL.lighting

PERI

SMALL-SCALE PERIMETER LIGHTING

E283

Modular assembly consists of pre-mounted bracket, field cuttable housing, and snap in light fixtures, reducing installation costs and providing flexibility in jobsite scheduling.

WALL MOUNT
- NS
- S-3/16-R
- S-1/2-R
- S-1-F
- S-1-R
- S-3-F
- S-3-R

LIGHT MODULE
- 90+ CRI
- Up To 1000+ Lumens Per Foot
- SW and DW Constant Voltage, SW Constant Current
- 1.5W/ft - 12.0W/ft
- 2000K - 5500K CCT


DRIVER
- Top
- Side
- Emergency
- Remote

HOUSING

OPTICS
- Asymmetric
- Lambertian (No Optics)

OPTIONAL LOUVER

FLANGE
- T-Bar, T-Slot, Mud-In
- Positions: Flush, 1.5" or 3.0"

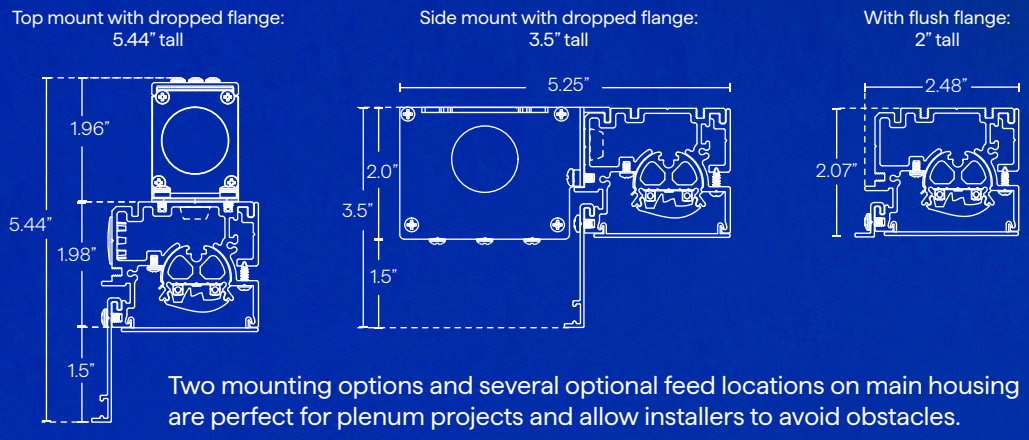

Two mounting options and several optional feed locations on main housing are perfect for plenum projects and allow installers to avoid obstacles.