
FLEX-MEZA RGBW

FLEX LIGHT



The FLEX series is ideal for architectural spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of QTL's FLEX series lights are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.

The FLEX Meza RGBW is color changing and can be controlled by a QTL supplied DMX controller or a third party controller may be used.

Technical Information


CCT	Lumen/ft	Wavelength
Red	15	618-624
Green	37	522-530
Blue	8	468-474


CCT	Lumen/ft	CRI
2700K	37	82-87
4000K	37	82-87

Housing Color

White

Dimensions





HB: Horizontal Bending
Min. 4.72" bending diameter

Part Number Builder

Product	Series	CCT	CRI	Watts/ft	Connector In	Connector In Orientation	Connector In Wire Length	Connector Out	Connector Out Orientation	Connector Out Wire Length	Illuminated Length (in)
FMZ-RGBW	**S**		**80**	**4.5**	**IM**			**IM**			
FMZ-RGBW	**S**	**RGBW-27** **RGBW-40**	**80**	**4.5**	**IM**	**FC** **BC** **SCL** **SCR** **MT*** **JC***	**1'** **3'** **10'**	**IM**	**FC** **BC** **SCL** **SCR** **EC** **MT** **JC**	**1'** **3'** **10'** **N/A**	3.94" increments **Nominal max length: 21'**
FLEX Meza RGBW Voltage: 24 VDC	Silicone			Up to 37 lm/ft at Green	Injected-Molded			Injected-Molded			

- Product length = illuminated length + connector length
- For factory assembled connector information, see following pages
- For compatible power supplies, see following pages
- For extrusion options, see following pages (sold separately)

*Used in conjunction with Connector/Orientation Out

- 5 year warranty on silicone
- Impact rating of IK08
- Ambient Working Temperature: -40°F to 113°F
- Ambient Installation Temperature: -40°F
- Max. Mounting Surface Temperature: 185°F
- Storage Temperature: -40°F to 140°F
- UV & Flame resistant construction
- No diode imaging
- Silicone - best for outdoor applications

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


FLEX-MEZA RGBW

FLEX LIGHT

Injected Molded Connectors - IP68


INJECTED-MOLDED CONNECTOR - IP68 | SILICONE

IM-FC




Front

IM-BC




Bottom

IM-SCL




Side-Left

IM-SCR




Side-Right

IM-EC




End cap

IM-MT



Middle T-feed

IM-JC



Jumper

Compatible Power Supplies

See website for additional power supply options

QTM-eLED+DMX



QOM-eLED+DMX



QTM-DRIVE



QOM-DRIVE



© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


FLEX-MEZA RGBW


FLEX LIGHT


Compatible Extrusions and Clips

NOTE: All extrusions are field cuttable and can be used with silicone housings.
1.5" length acts as a clip when used.

FMZ-NONL: Non self-locking aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"












FMZ-NONL-FL: Non self-locking flanged aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"












FMZ-SELF-SR: Self-locking serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"












FMZ-SELF-FL: Self-locking flanged serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"













FMZ-SELF-BD: Self-locking bendable serrated aluminum profile
Finish: Satin
Available lengths: 19.75", 39.5"







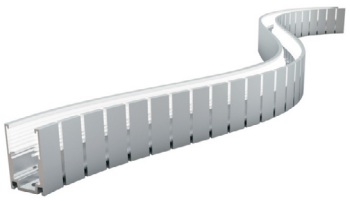

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting