
LEAD & INLINE CONNECTORS

Accessories

CLAMP AND SNAP CONNECTORS


FOR USE WITH SW24 LED SERIES, SC24 LED SERIES, AND SD-SW LED SERIES

iQ-CLP-LEAD




- Connects LED board to lead wire
- Wire Gauge 22 -18 AWG
- Voltage & Current 24VDC / 4A max
- DRY only
- No soldering required
- Does not fit in extrusions

iQ-CLP-INLINE




- Connects two LED boards together
- Wire Gauge 22 -18 AWG
- Voltage & Current 24VDC / 4A max
- DRY only
- No soldering required
- Does not fit in extrusions

iQ-SNP-LEAD



- Connects LED board to lead wire
- Wire Gauge 22 -20 AWG
- Voltage & Current 24VDC / 4A max
- Fits into all extrusions except SLIM and THIN (with no lens)
- DRY only
- No soldering required

iQ-SNP-INLINE




- Connects two LED boards together
- Wire Gauge 22 -20 AWG
- Voltage & Current 24VDC / 4A max
- Fits into all extrusions except SLIM and THIN (with no lens)
- DRY only
- No soldering required

Q-NECT-01

FOR USE WITH SW24 LED SERIES, SC24 LED SERIES, AND SD-SW LED SERIES


Q-NECT-01-LEAD-24

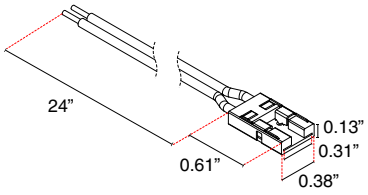



- Connects LED board to lead wire
- Standard 24" lead
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with all extrusions (SLIM with no lens)


Q-NECT-01-JUMP-3

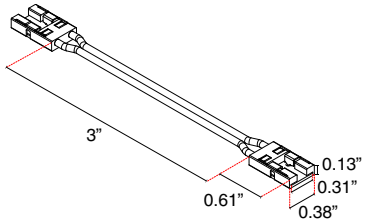



- Connects two LED boards together with jumper
- Standard 3" jumper
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with all extrusions (SLIM with no lens)

Q-NECT-01-INLINE





- Connects two LED boards together
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with all extrusions (SLIM with no lens)

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


LEAD & INLINE CONNECTORS

Accessories

Q-NECT-02

FOR USE WITH SW-HE+24 LED SERIES AND WD24 LED SERIES


Q-NECT-02-LEAD-24





- Connects LED board to lead wire
- Standard 24" lead
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with TORQ, VEVE, WIDE, LALO, TALO, ARKA, FLUR, EMBD, TRE3, TELA, MDIN, LATO, THIN


Q-NECT-02-JUMP-3





- Connects two LED boards together with jumper
- Standard 3" jumper
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with TORQ, VEVE, WIDE, LALO, TALO, ARKA, FLUR, EMBD, TRE3, TELA, MDIN, LATO, THIN

Q-NECT-02-INLINE







- Connects two LED boards together
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with TORQ, VEVE, WIDE, LALO, TALO, ARKA, FLUR, EMBD, TRE3, TELA, MDIN, LATO, THIN

Q-NECT-03

FOR USE WITH SW-HE24 LED SERIES


Q-NECT-03-LEAD-24




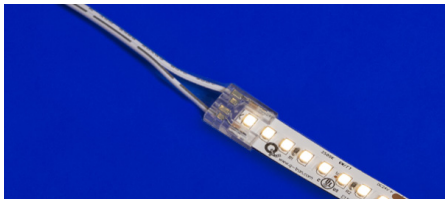

- Connects LED board to lead wire
- Standard 24" lead
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with WIDE, LALO, TALO, FLUR, EMBD, TRE3, LATO, THIN (with no lens)


Q-NECT-03-JUMP-3




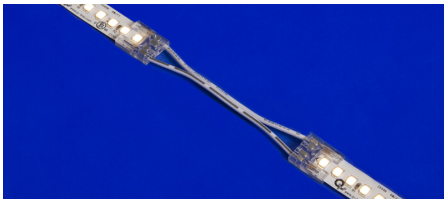

- Connects two LED boards together with jumper
- Standard 3" jumper
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with WIDE, LALO, TALO, FLUR, EMBD, TRE3, LATO, THIN (with no lens)

Q-NECT-03-INLINE



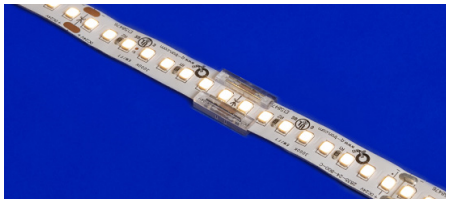

- Connects two LED boards together
- 5 per pack
- Wire Gauge - 20 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with WIDE, LALO, TALO, FLUR, EMBD, TRE3, LATO, THIN (with no lens)

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


LEAD & INLINE CONNECTORS


Accessories

Q-NECT-SCREW

FOR USE WITH SW24 LED SERIES, SW-HE+24 LED SERIES, SC24 LED SERIES, SD-SW LED SERIES, AND WD24 LED SERIES


Q-NECT-SCREW-LEAD-12



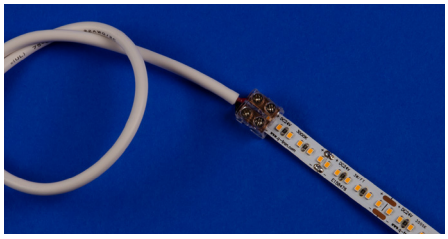

- Connects LED board to lead wire
- Screw fastenings (do not overtighten)
- 12" lead
- Sold individually
- Wire Gauge - 22 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with TORQ, WIDE, LALO, TALO, ARKA, EMBD, TRE3, TELA, & MDIN

Q-NECT-SCREW-JUMP-12

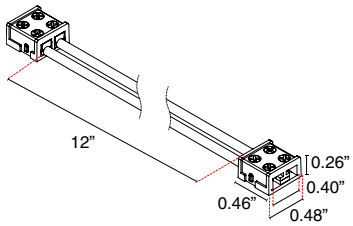



- Connects two LED boards together with jumper
- Screw fastenings (do not overtighten)
- 12" jumper
- Sold individually
- Wire Gauge - 22 AWG
- Voltage & Current - 24VDC / 4A max
- DRY only
- No soldering required
- Compatible with TORQ, WIDE, LALO, TALO, ARKA, EMBD, TRE3, TELA, & MDIN

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

LEAD & INLINE CONNECTORS

Accesories Installation Instructions


ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Diagrams for representation only and not to scale.
- For indoor wire-to-board and board-to-wire
- Eliminate the need for soldering

CLAMP AND SNAP CONNECTORS



iQ-CLP-LEAD



iQ-CLP-INLINE




iQ-SNP-LEAD




iQ-SNP-INLINE


Q-NECT-LEAD



Q-NECT-01-LEAD




Q-NECT-02-LEAD




Q-NECT-03-LEAD


Q-NECT-JUMP



Q-NECT-01-JUMP




Q-NECT-02-JUMP




Q-NECT-03-JUMP


Q-NECT-INLINE



Q-NECT-01-INLINE




Q-NECT-02-INLINE




Q-NECT-03-INLINE

Q-NECT-SCREW



Q-NECT-SCREW-LEAD



Q-NECT-SCREW-JUMP


Connector InstallatioN

- iQ-CLP-LEAD (page 2)
- iQ-CLP-INLINE (page 3)
- iQ-SNP-LEAD (page 4)
- iQ-SNP-INLINE (page 5)
- Q-NECT-LEAD (page 6)
- Q-NECT-JUMP (page 7)
- Q-NECT-INLINE (page 8)
- Q-NECT-SCREW-LEAD (page 9)
- Q-NECT-SCREW-JUMP (page 10)

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **IQ-CLP-LEAD**


- Lead wire to LED board
- Wire Gauge 22-18 AWG
- Voltage & Current 24VDC/5A max

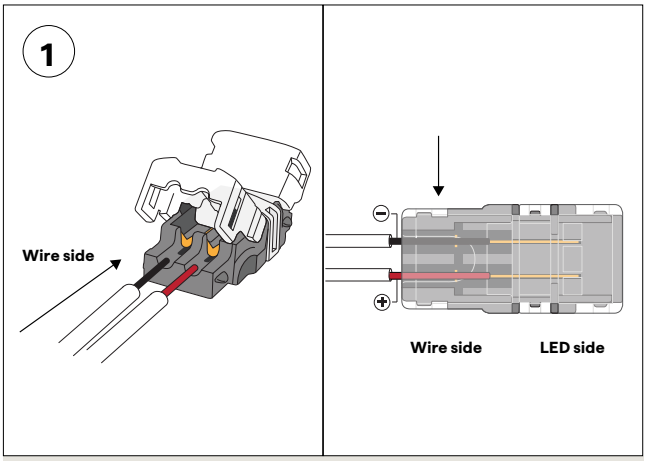

a. Insert the bare wires into the wire side of the clip

b. Clamp down wires between the top clear piece and bottom piece using pliers


NOTE: Wire does not need to be pre-stripped

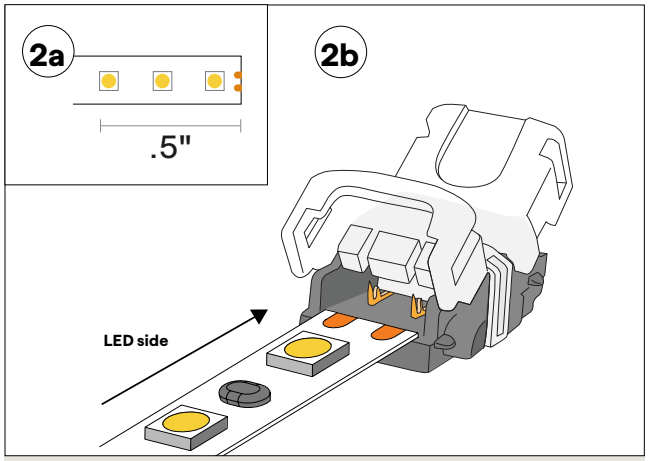

a. Peel back .5" of the adhesive on the bottom of LED board to allow a proper fit

b. Line up the polarity of the LED lines with the polarity of the strip and insert LED strip into LED side of clip.

IMPORTANT: Ensure polarity of LED lines up with the polarity of the wire

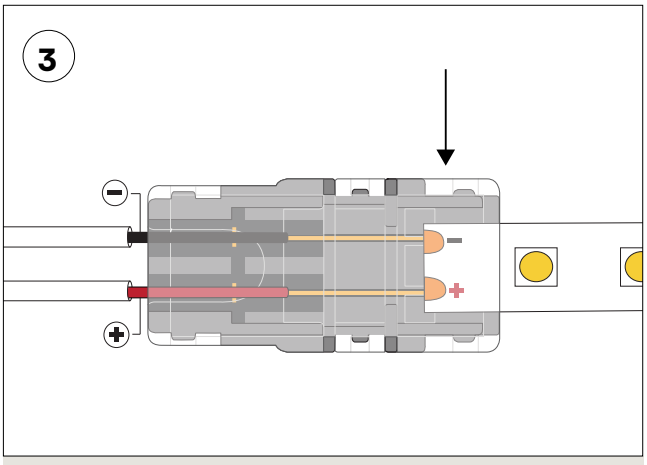


Clamp down LED strip between the top clear piece and bottom piece using pliers

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **IQ-CLP-INLINE**


- LED board to LED board
- Wire Gauge 22-18 AWG
- Voltage & Current 24VDC/5A max

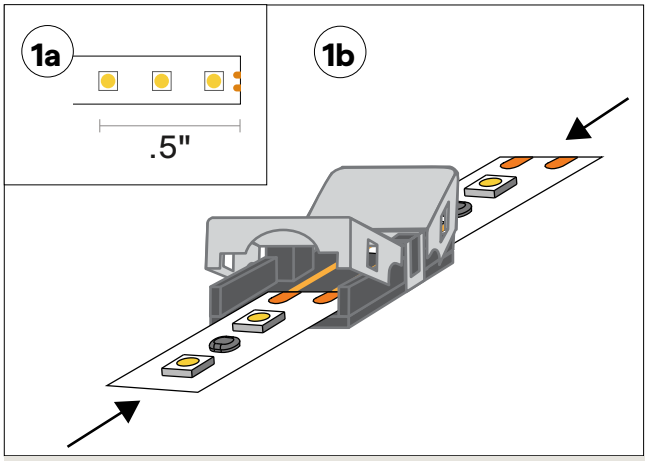

a. Peel back .5" of adhesive on bottom of LED board to allow proper fit.

b. Line up the polarity of the LED strips with each other and insert LED strips

IMPORTANT: Ensure polarity of LED strips lines up with each other

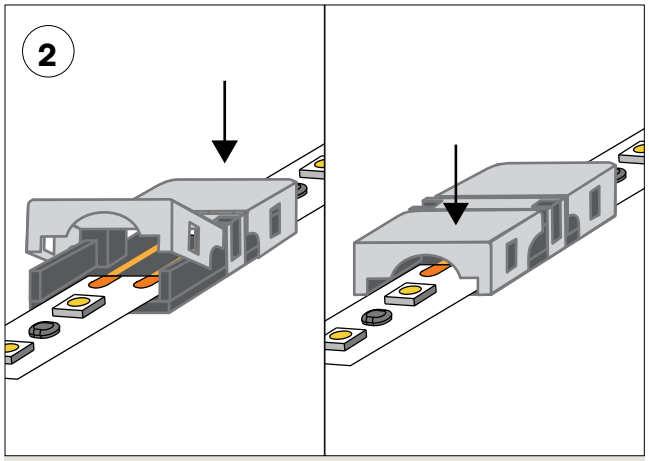


Clamp down LED strip between the top clear piece and bottom piece using pliers.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **IQ-SNP-LEAD**

- Lead wire to LED board
- Wire Gauge 22-20 AWG
- Voltage & Current 24VDC/5A max

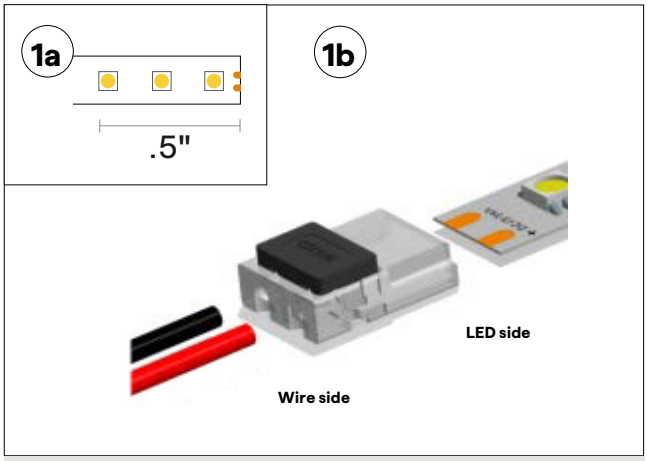


a. Peel back .5" of the adhesive on the bottom of LED board to allow a proper fit

b. Line up the polarity of the LED lines with the polarity of the strip and insert LED strip into LED side of clip.

NOTE: Wire does not need to be pre-stripped

IMPORTANT: Ensure polarity of LED lines up with the polarity of the wire

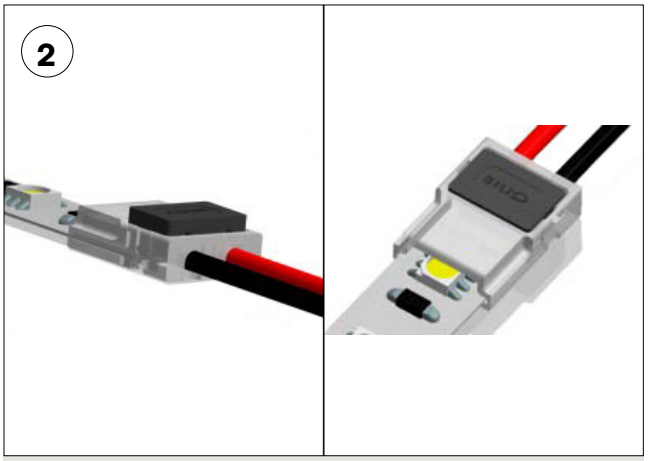


a. Both sides must be inserted before it is clamped down

b. Clamp down wires and LED strip with pliers. Black button on top should be flush with clear surface.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **IQ-SNP-INLINE**


- LED board to LED board
- Wire Gauge 22-20 AWG
- Voltage & Current 24VDC/5A max

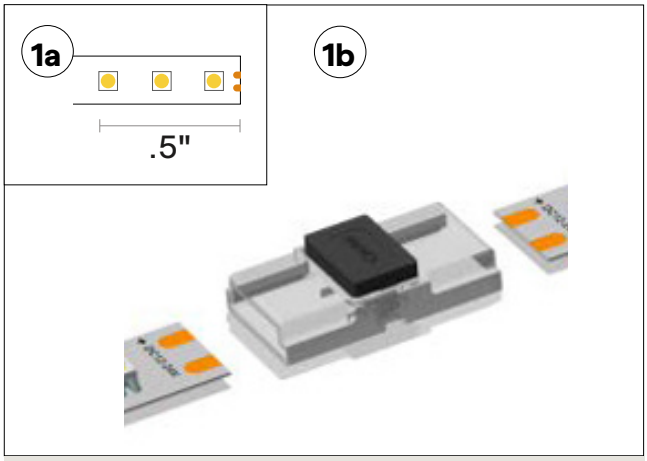

a. Peel back .5" of adhesive on bottom of LED board to allow proper fit.

b. Line up the polarity of the LED strips with each other and insert LED strips

IMPORTANT: Ensure polarity of LED strips lines up with each other

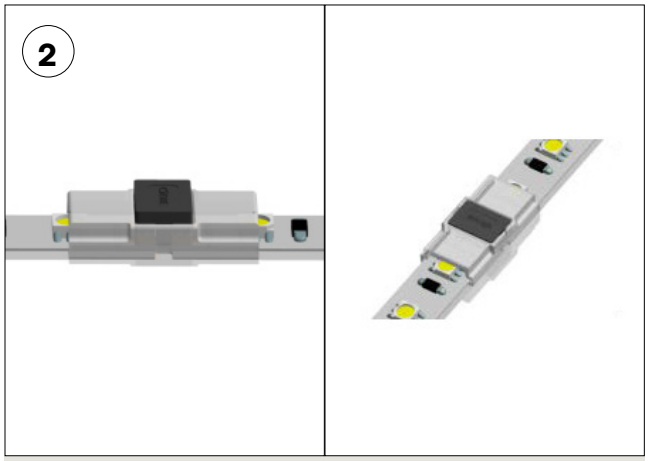


a. Both sides must be inserted before it is clamped down.

b. Clamp down both LED strips. Black button on top should be flush with clear surface.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **Q-NECT-LEAD**


- Lead wire to LED board
- Wire Gauge 20 AWG
- Voltage & Current 24VDC/4A max

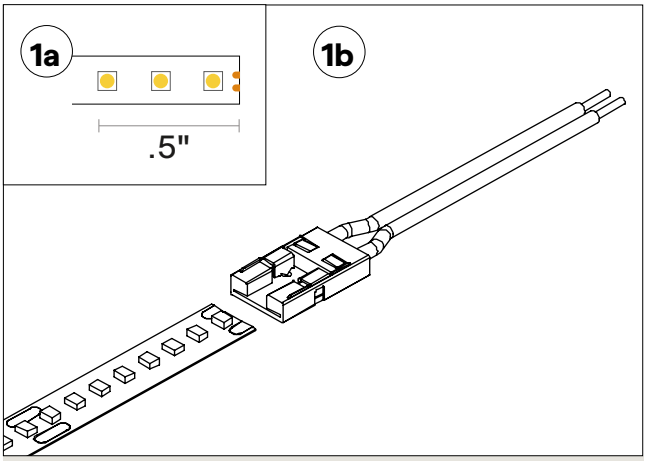

a. Insert the bare wires into the wire side of the clip

b. Line up the polarity of the LED lines up with the polarity of the wire. Insert LED strip into LED side of the connector. Slide the LED strip all the way until the end of the strip touches the connectors wall.

NOTE: As a recommendation, wire with writing is +24V and wire with grey dashes is negative.

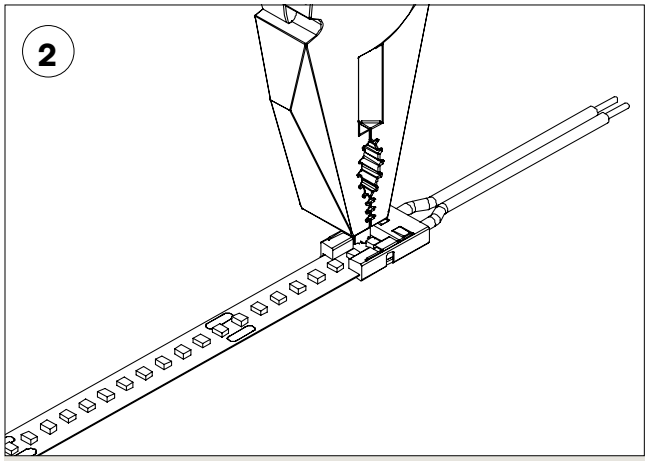


Press down on the terminals on each side to puncture the strip.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **Q-NECT-JUMP**


- Connect two LED boards
- Wire Gauge 20 AWG
- Voltage & Current 24VDC/4A max

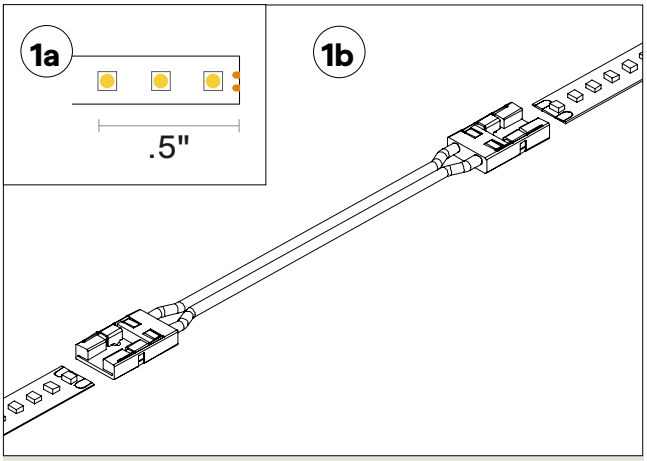

a. Peel back .5" of adhesive on bottom of LED boards to allow proper fit.

b. Line up the polarity of the LED strips with each other and insert LED strips into each end of connector.

NOTE: As a recommendation, wire with writing is +24V and wire with grey dashes is negative.

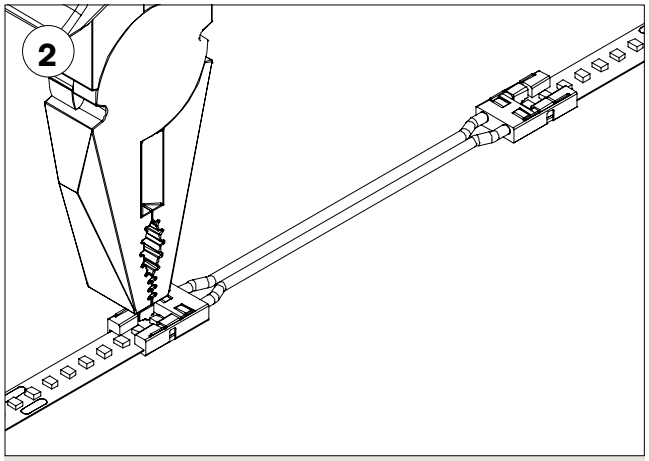


Press down on the terminals. Repeat on second connector.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


SURFACE MOUNTING METHOD: **Q-NECT-INLINE**

- LED board to LED board
- Voltage & Current 24VDC/4A max

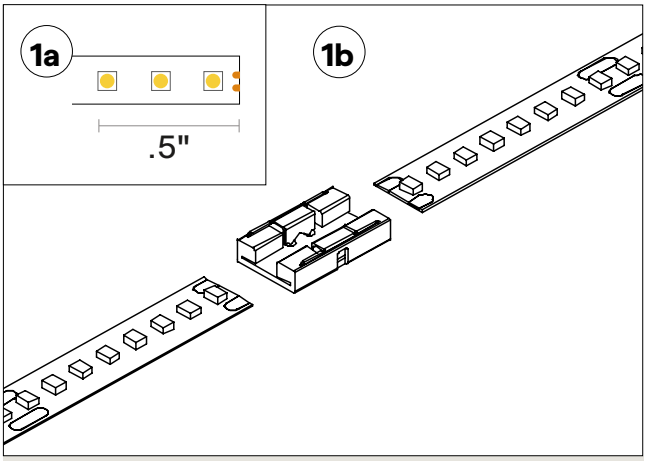

a. Peel back .5" of adhesive on bottom of LED boards to allow proper fit.

b. Ensure polarity of LED strips line up with each other. Ensure each board stops in the middle of the connection. Metal contact must puncture both boards. Insert LED strips into each end of connector.

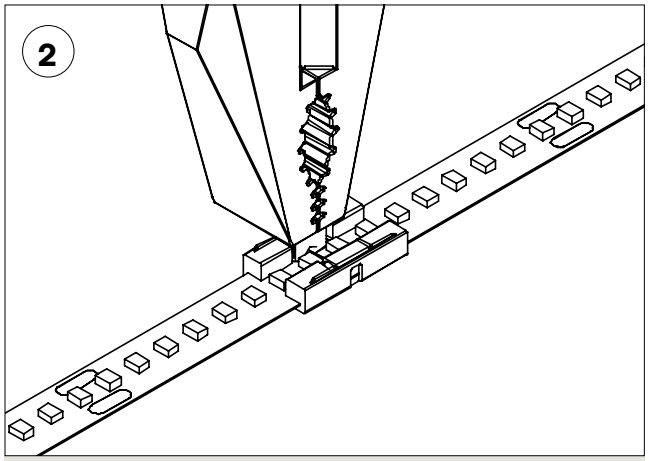


Both sides must be inserted before it is clamped down. Clamp down on each side.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **Q-NECT-SCREW-LEAD**


- Lead wire to LED board
- Wire Gauge 22 AWG
- Voltage & Current 24VDC/4A max

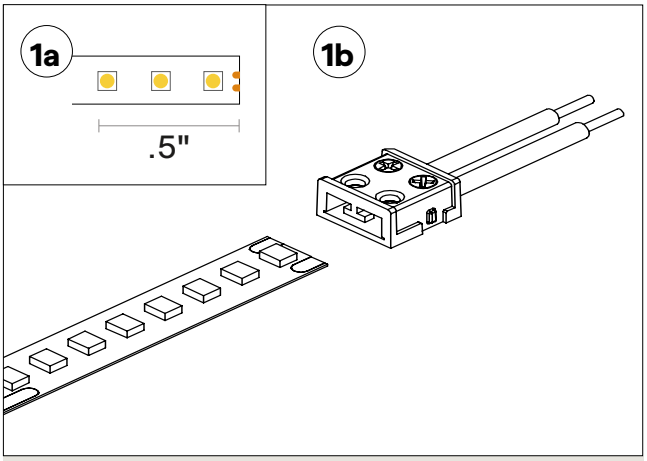

a. Peel back .5" of adhesive on bottom of LED board to allow proper fit.

b. Line up the polarity of the LED lines with the polarity of the strip and insert LED strip into LED side of clip.

NOTE: Red wire is +24V, black wire is negative.

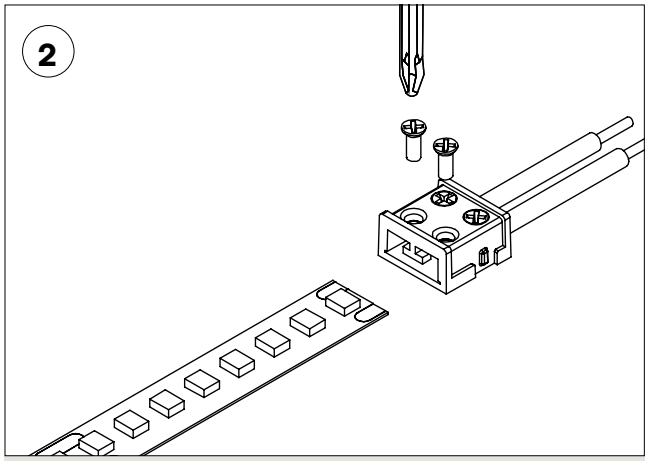


Screw down

NOTE: Do not over tighten

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


SURFACE MOUNTING METHOD: **Q-NECT-SCREW-JUMP**

- Connect two LED boards
- Wire Gauge 22 AWG
- Voltage & Current 24VDC/4A max

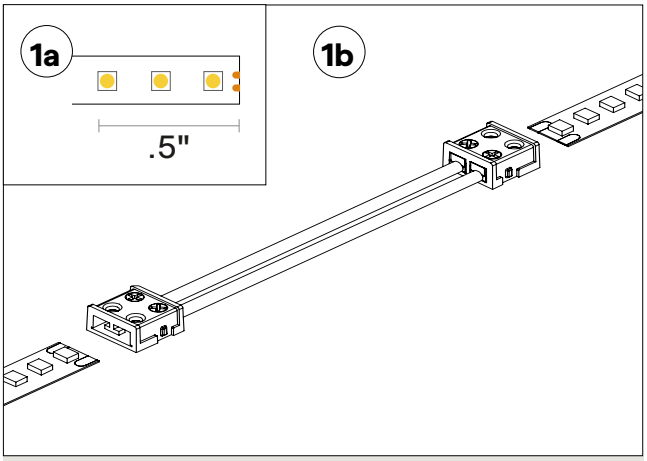

a. Peel back .5" of adhesive on bottom of LED board to allow proper fit.

b. Line up the polarity of the LED strips with each other and insert LED strips into each end of the connector

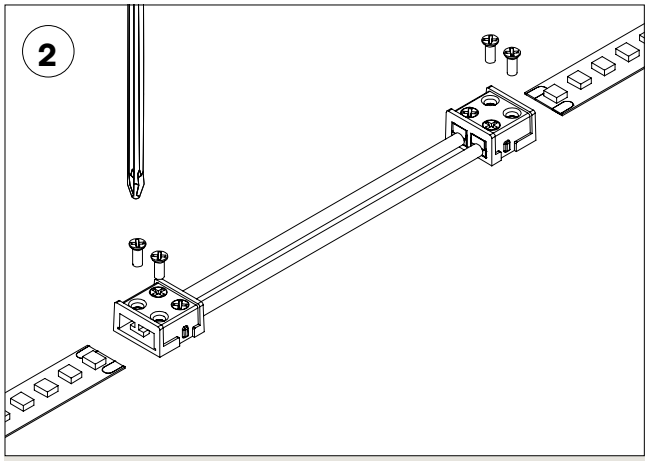

Screw down both connections. Repeat on second connector.

NOTE: Do not over tighten

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting