
FLEX-OUTERBEND STATIC WHITE

FLEX LIGHT

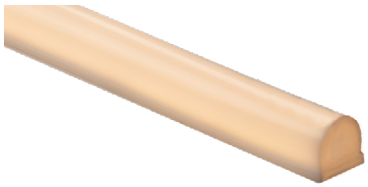


The FLEX series is ideal for spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of QTL's FLEX series fixtures are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.


The FLEX Outerbend is available in white with a 2700K and 3000K option.

Technical Information

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	114	44 Lm/W	93	59	90	96
3000K	122	47 Lm/W	91	65	90	99

Dimensions

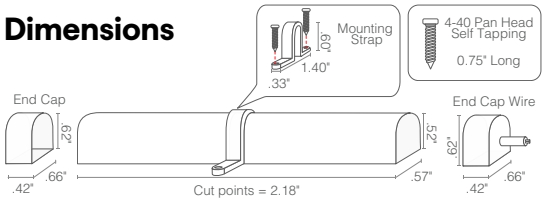



Side bend
1.18" bending radius

Part Number Builder

Product	CCT - Lumens/CRI	Watts/ft	Illuminated Length (in)
OBD-SW		**2.6**	
OBD-SW Outerbend Static White Voltage: 24 VDC	**27** - 2700K 114/93 **30** - 3000K 122/91	**2.6**	2.18" increments **Nominal max length: 408"**

Compatible Power Supplies

See website for additional power supply options

QZ	iQ-PH	QTM-DC+CAP	QTM-eLED	Q6M-DC+CAP	QOM-eLED	QOM-DC+CAP	Q-SET-eLED	QTM-DC	QOM-DC	Q6S-DC	QTM-eLED(L)	QTM-eLED(E)
												

- 2 year warranty
- IP66 rated
- Ambient temperature: -40°F to +176°F
- UV & Flame resistant construction
- LED lifetime - 30,000 hours
- For runs greater than 49 feet, separate power feeds needed at each end. Power supply cut sheets will provide max distance/ loads per power supply.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-09-26-24