BOOM-INLINE (01)

Linear Fixtures - Suspended

SUSPENSION KITS - Part Number Builder

POWER FEED SUSPENSION KIT

Product	Feed	Canopy Shape	Canopy Size	Canopy Color	Application	Suspension Cable Length (in)
SK	SF - Single Feed DF - Double Feed	RD - Round SQ - Square	5"	WH - White BK - Black	JB - Junction Box TB - T-Bar Mount	36" 120"

NON-FEED SUSPENSION KIT

Product	Feed	Canopy Shape	Canopy Size	Canopy Color	Application	Suspension Cable Length (in)
SK	NF - No Feed	RD - Round SQ - Square	2" 5"	WH - White BK - Black	TB - T-Bar Mount LS - Lag Screw	36" 120"
			5"		JB - Junction Box	

JB NF mount can only use 5" canopy




KEY

- Single cable feed
- Double cable feed

- Shop drawings required
- Fixture lengths over 10' deflect slightly by 3/16"
- If no suspension length provided, 36" is standard
- Suspension cable maximum length: 120"
- Suspension cable is field cuttable
- Consult factory for power over aircraft
- Consult factory for custom color of canopy
- Lag Screw is for mounting into drywall, wood, or other types of finished ceilings for non-feed mounting only


Kit Contents

- 1/16" Steel suspension cable – 36" standard
- Selected canopy
- Cable Gripper
- Cable Coupler



T-BAR JBOX

Included with T-Bar feed kits



T-BAR CLIP

Included with T-Bar non-feed kits



LAG SCREW

Included with Lag Screw non-feed kits

JBOX

- Bracket to mount to junction box (junction box not included)
- Wire strain relief
- Ties for securing electrical cable to suspension cable
- 4×4" junction box required but provided by others

T-BAR – feed

- Includes junction box specifically designed for T-BAR applications
- Bracket to mount to junction box
- Wire strain relief
- Ties for securing electrical wire to suspension cable

T-BAR – non-feed

- Bracket to mount to T-BAR (no junction box)

LAG SCREW – non-feed only

- Double ended screw, with a wood thread side and machine thread side
- One piece cable coupler

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

BOOM-INLINE (01)

Linear Fixtures - Suspended

Canopy Options


RD - 2" - NF




SQ - 2" - NF




RD - 5" - NF




SQ - 5" - NF




RD - 5" - SF




SQ - 5" - SF



RD - 5" - DF



SQ - 5" - DF




Canopy Finish

BK — Black

WH — White


Application

JB



T-Bar Junction Box

TB




T-Bar Clip

LS




Lag Screw

Kit Hardware




Cable Gripper




Cable Coupler

Order Examples

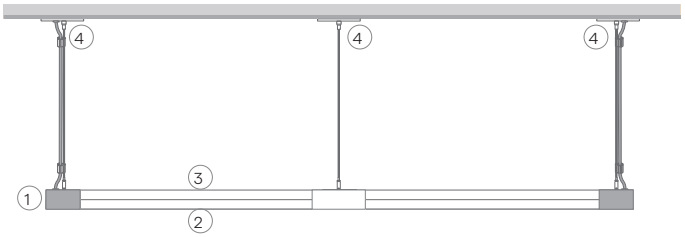

SINGLE CABLE FEED

1. BOOM01-IN-2C-ST-ST-FT-BL-CL-SV-(1-XX")(2-XX")
2. BOOM01-DOWN-SW-5.0-35-NA-DF
3. BOOM01-UP-SW-6.0HE-35-110D
4. SK-SF-RD-5"-WH-TB-XX" (x2), SK-NF-RD-2"-WH-TB-XX"

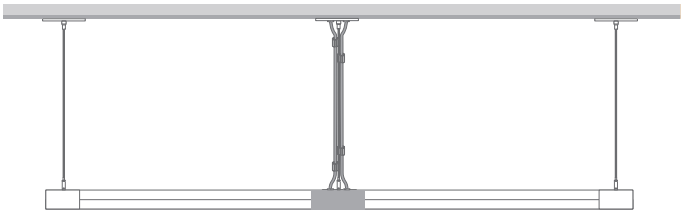

DOUBLE CABLE FEED

1. BOOM01-IN-2C-ST-ST-FT-BL-CL-SV-(1-XX")(2-XX")
2. BOOM01-DOWN-SW-5.0-35-NA-DF
3. BOOM01-UP-SW-6.0HE-35-110D
4. SK-SF-RD-5"-WH-TB-XX", SK-NF-RD-2"-WH-TB-XX" (x2)

BOOM ORDERING PROCESS

1. Specify assembled fixture details
2. Specify downlight
3. Specify uplight
4. Specify suspension kit(s)

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting