

ESSENTIALS EMBD-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Recessed





- Recessed flanged fixture designed for drywall and millwork installations
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include spring or magnet mounting clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications
- 21 diodes per 2" cutpoint allowing for minimal diode visibility

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
EB3RGBW			ENC	STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR / WIRE IN	9 CONNECTOR / WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/ OPTIMAL
			STD	STD						

Sample Part Number: **EB3RGBW-4.0HE-30-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-SP-ST-48"-E**

1 PRODUCT

EB3RGBW

See following pages for compatible power supplies.

2 WATTS/FT

6.0 6.0W/ft

4.0HE 4.0W/ft HE

3 CCT

27 RGBW-2700K
30 RGBW-3000K

27 RGBW-2700K
30 RGBW-3000K
35 RGBW-3500K
40 RGBW-4000K

4 RATED

ENC IP67

5 EFFICIENCY

STD Standard

6 LENS

CL Clear
TL Translucent

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed

For continuous mounting, consider bottom feed

8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 INPUT END CAP

STD Standard

STD - End cap matches fixture finish chosen

11 OUTPUT END CAP

STD Standard

STD - End cap matches fixture finish chosen

12 WIRE COLOR

WH White
BK Black

13 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

14 MOUNTING

SP Spring Clip
MG Magnet

MG only available with RGBW 6.0

15 FINISH

ST Satin
CU Custom

Custom finishes require a longer lead time, consult factory

16 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

17 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-03-24-26


ESSENTIALS EMBD-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile



Profile with magnet mounting clip



Spring mounting clip



Profile with spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with EB3RGBW-**-30-ENC-STD

	6.0 W/FT								4.0HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
CL	22	631	60	513	18	464	76	93	19	629	74	516	16	465	46	97
TL	18	631	48	513	14	464	61	93	16	629	60	516	13	465	37	97

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS

	6.0 W/FT		4.0 HE W/FT	
	Min	Max	Min	Max
Ambient Operating Temp - Recessed	-4°F	95°F	-4°F	100°F


7 WIRE INPUT/OUTPUT

SINGLE (Input only)



End Feed | Bottom Feed

PASS THROUGH (Input/Output)




End Feed | Bottom Feed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


ESSENTIALS EMBD-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Recessed


CONFIGURATION OPTIONS




Single End Feed



Non-Continuous End Feed



Non-Continuous Bottom Feed




Non-Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

BW



Bare Wire 24"
22 AWG

CON6/CON24



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed


12 WIRE COLOR

White

Black

14 MOUNTING

SP



Spring Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SP-01

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02



Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

15 FINISH

Satin


Custom finishes require a longer lead time, consult factory

17 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

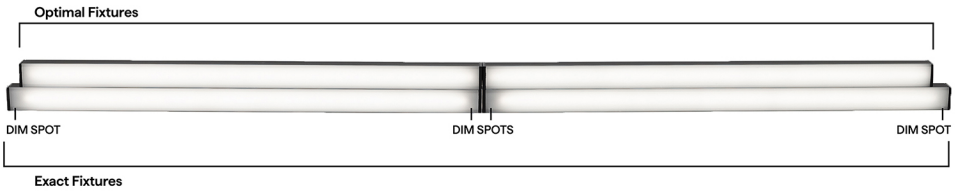


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS EMBD-ENCAPSULATED (03) RGBW





24VDC Linear Fixtures - Recessed

RGBW-HE ENC LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH





Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

RGBW ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	8.51"		8.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	12.51"		12.86"	
16"	12.51"		12.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	16.51"		16.86"	
20"	16.51"		16.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	20.51"		20.86"	
24"	20.51"		20.86"	
36"	32.51"		32.86"	
48"	44.51"		44.86"	
60"	56.51"		56.86"	
72"	68.51"		68.86"	
84"	80.51"		80.86"	
96"	92.51"		92.86"	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS EMBD-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Recessed

COMPATIBLE POWER SUPPLIES


See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES


MMA-02



Magnet Mount Accessory of MG-02

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

iQ-DMX-STICK-GA2



DMX controller for changing color & dimming

iQ-DMX-STICK-DE3



DMX controller for changing color & dimming

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS EMBD-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting