

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed





- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Once installed, its wings are covered with tape and compound to create a seamless look
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

Specify either factory assembled fixtures or field assembled extrusions and LEDs.

A LEDs will be installed into a complete fixture. Mud-in housing ships uninstalled. Ideal for single fixtures. Avoids installers needing to handle the delicate 5mm LED.

OR

B Extrusions, mud-in housings, and LEDs will be shipped not installed. Ideal for long runs or light with no interruptions in LED up to Class 2 limitations. Due to the delicate nature of the 5mm LED, care must be taken in the installation process

A. Factory Assembled Option - LED FIXTURE

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1 PRODUCT	A2 WATTS/ FT	A3 CCT	A4 RATED	A5 LENS
	2.0			

ADDITIONAL INFORMATION REQUIRED TO ORDER

A6 WIRE INPUT/ OUTPUT	A7 CONNECTOR/ WIRE IN	A8 CONNECTOR/ WIRE OUT	A9 WIRE COLOR	A10 WIRE TYPE	A11 MOUNTING	A12 FINISH	A13 LENGTH (IN)	A14 EXACT/ OPTIMAL

Sample Part Number: **POP-MD-01-DW-2.0-20/30-DRY-DF-S1A-BW-CLS-WH-CL2-SP-ST-48"-E**

A1 PRODUCT

POP-MD-01-DW
POP-MD-01-DW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply. DMP options will require custom modifications, contact factory.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

A2 WATTS/FT

2.0 2.0W/ft

A3 CCT

18/30	1800K/3000K
18/35	1800K/3500K
20/27	2000K/2700K
20/30	2000K/3000K
24/40	2400K/4000K
27/40	2700K/4000K
27/55	2700K/5500K

A4 RATED

DRY	IP20
DMP	IP54

A5 LENS

DF	Diffused
PR	Polar

For representation of LED visibility, see Diode Visibility section on following pages.For beam angles, see Photometric Performance section on following pages

A6 WIRE INPUT/ OUTPUT

SINGLE (Input only)

S1A	End Feed
S1B	End Feed
S2A	Bottom Feed
S2B	Bottom Feed

PASS THROUGH (Input/output)

P1A	End Feed
P1B	End Feed
P2A	Bottom Feed
P2B	Bottom Feed

For continuous mounting, consider bottom feed.

A7 CONNECTOR/ WIRE IN

BW Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A8 CONNECTOR/ WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 WIRE COLOR

WH	White
BK	Black

A10 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

A11 MOUNTING

SC	Screw
SP	Spring Clip

For either mounting option POP-MD-MNT-KIT is required for mounting POP into the Mud-In Channel

A12 FINISH

ST	Satin
BK	Black
BZ	Bronze
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

A13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

A14 EXACT/ OPTIMAL

E	Exact specified length
O	Optimal illumination

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

MUD-IN HOUSING

A15 PRODUCT	A16 LENGTH
POP-MD	

Sample Part Number: **POP-MD-FCN**

A15 PRODUCT

POP-MD

A16 LENGTH

FCN	Field Cuttable
CTL	Cut to Length

Full length 98.43" housings will be sent for field cuttable specifications. Quantity will be determined by dividing the POP fixture measurements by 98.43 and rounding up. Cut to length housing specifications will be the length of the POP fixture specified, plus .125" for endcaps.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-07-26

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

B. Field Assembled Option

EXTRUSION AND MUD-IN HOUSING ORDERING

B1	B2	B3	B4	B5	B6
PRODUCT	FINISH	MOUNTING	LENS	WIRE INPUT/ OUTPUT	EXTRUSION LENGTH (IN)
POP-MD-01				NI	

LED STRIP ORDERING

B7	B8	B9	B10	B11	B12	B13	B14
V/ WATTS	RATED	CCT - LUMENS/ CRI	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
DW24-5MM/2.0			BW	CLS		CL2	

EXTRUSION AND MUD-IN HOUSING ORDERING

Sample Part Number: **POP-MD-01-ST-SP-DF-NI-98.43"**

B1 PRODUCT

POP-MD-01

B2 FINISH

ST Satin
BK Black
BZ Bronze
WH White
CU Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

B3 MOUNTING

SC Screw
SP Spring Clip

For either mounting option POP-MD-MNT-KIT is required for mounting POP into the Mud-In Channel

B4 LENS

DF Diffused
PR Polar

For representation of LED visibility, see Diode Visibility section on following pages.For beam angles, see Photometric Performance section on following pages

B5 WIRE INPUT/OUTPUT

NI Not installed

B6 EXTRUSION LENGTH (IN)

1" increments from 1" - 98.43"
Extrusion Tolerance +0 -1/8".

LED STRIP ORDERING

Sample Part Number: **DW24-5MM/2.0-DRY-20/27-BW-CLS-WH-CL2-48"**

B7 V/WATTS

DW24-5MM/2.0

Wattage: 2.0W/ft
Voltage: 24VDC
See following pages for compatible power supplies.

B8 RATED

DRY IP20
DMP IP54

B9 CCT - LUMENS/CRI

18/30 1800K/3000K
18/35 1800K/3500K
20/27 2000K/2700K
20/30 2000K/3000K
24/40 2400K/4000K
27/40 2700K/4000K
27/55 2700K/5500K

B10 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")

B11 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

B12 WIRE COLOR

WH White
BK Black

B13 WIRE TYPE

CL2 Class 2

B14 ILLUMINATED LENGTH

2"-576" in 2" increments

Order LED length needed for each run. Lengths cannot exceed 48' (Class 2). All lengths will have a 2' soldered lead wire attached. This product is not to be field-soldered.

REQUIRED ACCESSORY

UNIV-ROLLER




Roller tool used to lay MICRO 5 LED strips into extrusion housing

Included and required for all MICRO 5 field assembled options

To order additional, use UNIV-ROLLER


END CAPS

Flat end caps



Feed

To order separately, use POP-EC-MDIN-A-ST



Feed


To order separately, use POP-EC-MDIN-B-ST

© 2026 QTL. All rights reserved


MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


A1 / B1 PRODUCT - DIMENSIONS




Profile



Profile with mud-in accessory



Profile with mud-in accessory and spring clip



Profile with mud-in accessory and screw mount

A2 / B9 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with POP-01-DW-2.0-**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	77	93	89	98	93	98	95	97	100	97
DF	69	93	81	98	83	98	86	97	93	97

A5 / B4 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K

TEMPERATURE RATINGS

		DW 2.0 W/FT		DW 4.0 W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	110°F


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Recessed

A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

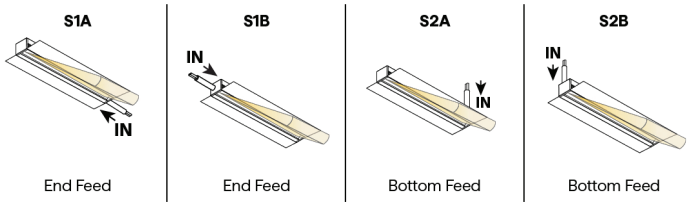


ASYMMETRIC ONLY PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

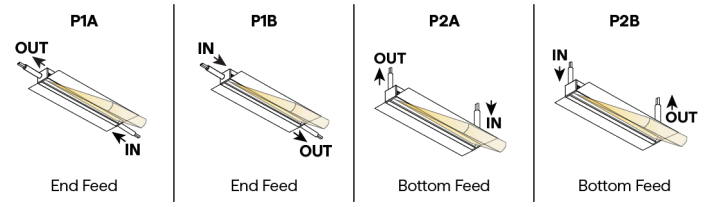


CONFIGURATION OPTIONS



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others


Non-Continuous Corner Feed



Continuous Bottom Feed




Continuous Bottom Feed



Continuous End to End Feed


A7 / A8 / B10 / B11 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"
22 AWG

A9 / B12 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-07-26

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

A11 / B3 MOUNTING

POP-MD-MNT-KIT




Plastic Clip Kit

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use POP-MD-MNT-KIT

Each clip comes with a #4 x 3/16 Flat Head SS" and two #6 x 1/8" long set screws

SP




Spring Clip

Only to be used with mud-in accessory

4 clips provided for each full length of MUD-IN

To order separately use SP-02


832



832 Silicone

Sold separately

SC



Screw

6 #6x1.75" flat head screws are provided for each full length of MUD-IN

A12 / B2 FINISH


- Satin
- Black
- Bronze
- White

Custom finishes require a longer lead time, consult factory

A14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

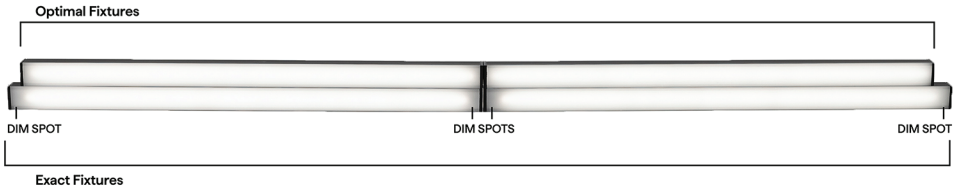


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS



24VDC Linear Fixtures - Recessed

DW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved


MICRO 5 POP MUD-IN

Linear Fixture Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Warranty only valid with QTL power supplies
- Recessed in millwork
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

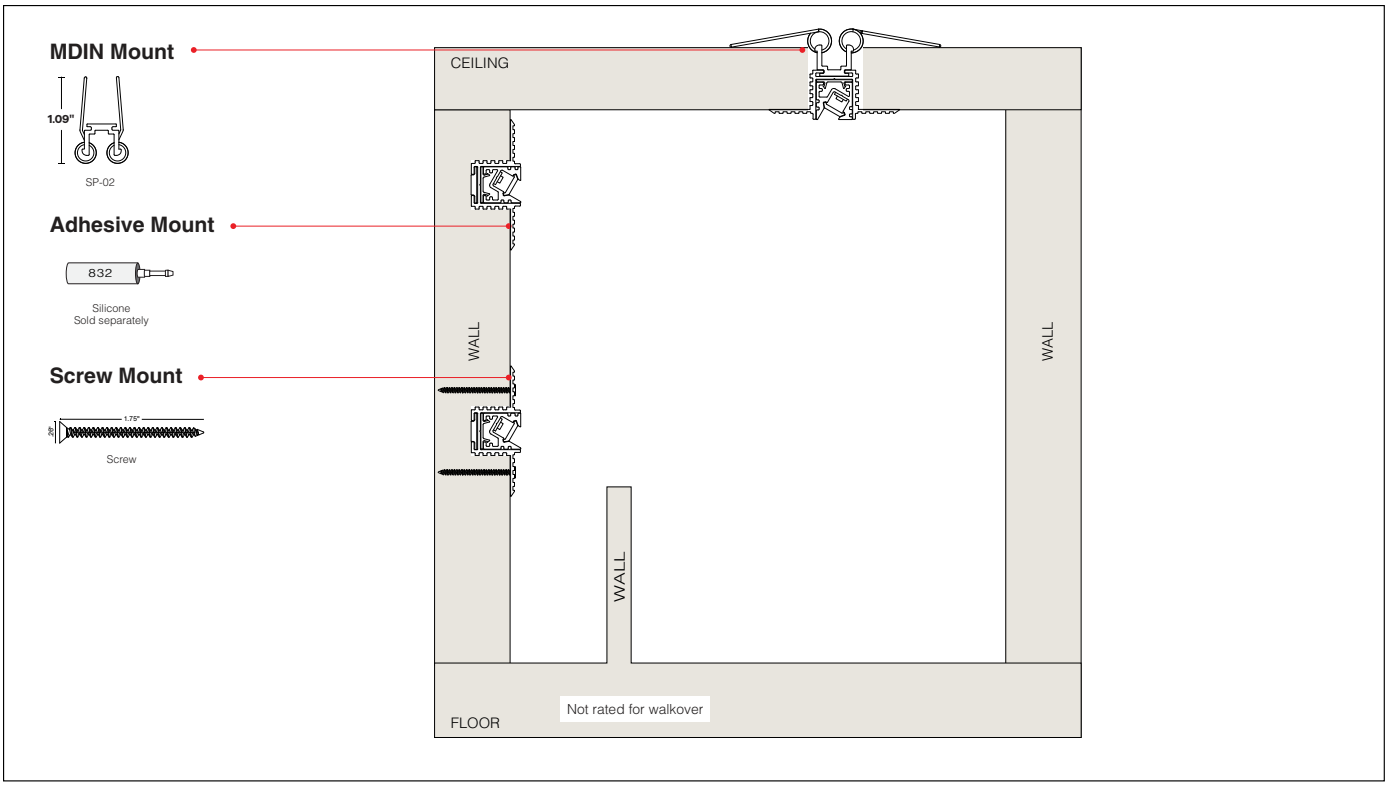

Preparation

- Components & Hardware (page 2)
- Cutting & Configuration Options (page 3)
- Surface Preparation & Assembly (page 4-5)


Recessed Mounting Method

- Mud-in Silicone Mount (page 6-7)
- Mud-in Screw Mount (page 8-9)
- Mud-in Spring Mount (page 10-11)


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP MUD-IN

Linear Fixture Installation Instructions



POP MUD-IN-FLAT (01)




POP MUD-IN-ENCAPSULATED (03)

COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size

PLASTIC CLIP KIT



POPMD-MNT-KIT

Included	
0.21"	Flat Head Screw #4 x3/16"
0.14"	2x Set Screw #6 x 1/8"

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'.


SPRING CLIP



SP-02

- 2 clips provided for 4' or less. 4 clips provided for greater than 4'

SCREW




SC

- 6 # 6x1.75" Flat Head Screw provided for each full length of Mud-In

ADHESIVE SOLD SEPARATRLY

SILICONE



DOWSIL 832

REQUIRED ACCESSORY



UNI-ROLLER

Included
Included and required for all MICRO 5 field assembled options

- Roller tool used to lay MICRO 5 LED strip into extrusion housing. To order additional use UNI-ROLLER


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP MUD-IN

Linear Fixture Installation Instructions


CUTTING EXTRUSIONS FOR IN-FIELD ASSEMBLY INSTALLATION

QTL strongly recommends cutting the extrusion and lens together to achieve a clean cut.

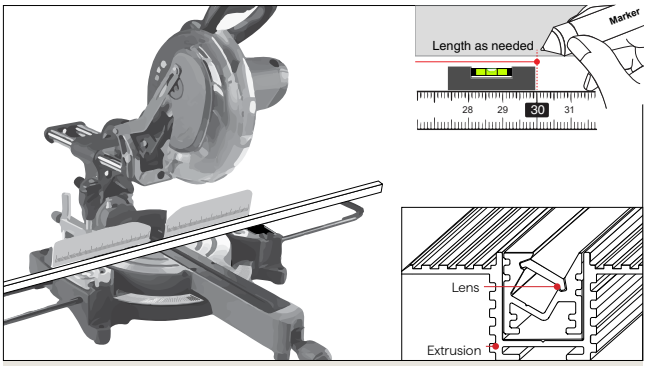

To achieve corners or angles, measure the LED extrusion to desired length and cut with a miter saw.


OR

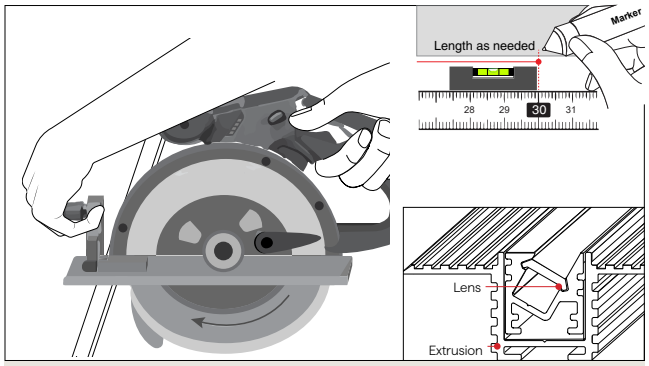

For straight runs, measure LED extrusion to desired length and cut it with a circular saw.

NOTE: Using the proper blade for aluminum, cut to the desired length. Recommend using a 10 in.x 80 tooth medium aluminum saw blade.

CONFIGURATION OPTIONS

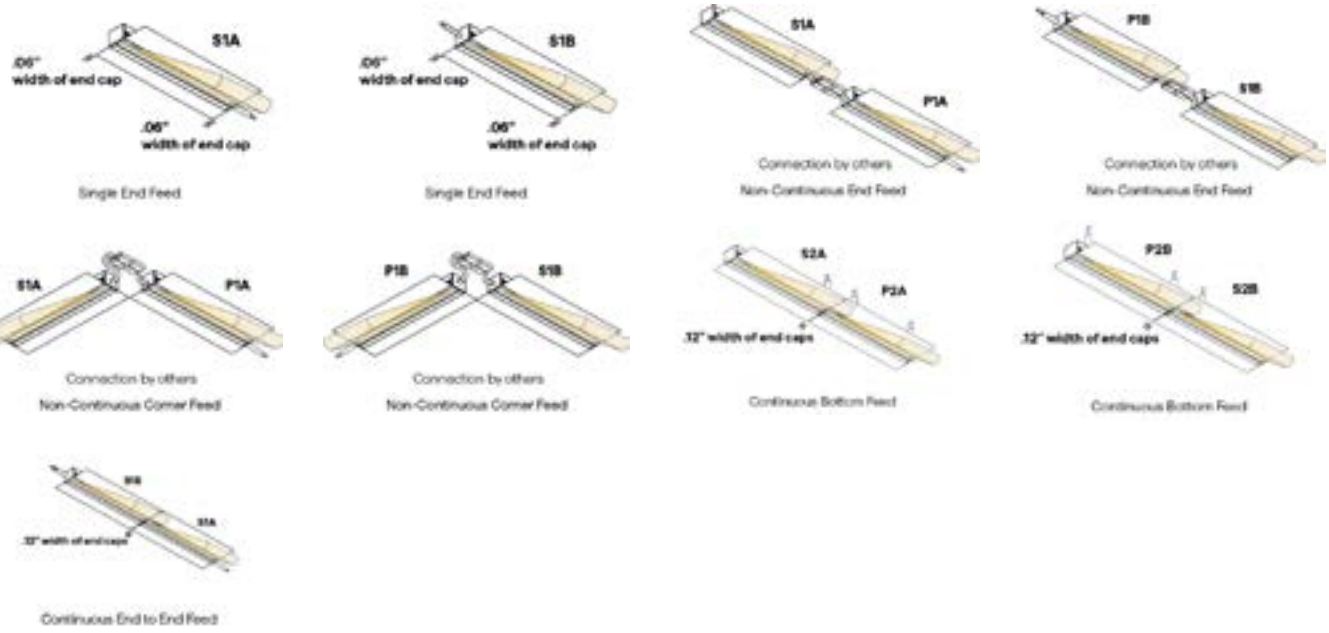

Review wire method to ensure clean installation prior to mounting extrusion.

NOTE: Additional wire methods include:
S1A, S1B, S2A, S2B: Connector/Wire Input only
P1A, P1B, P2A, P2B: Connector/Wire Input and Output


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP MUD-IN


Linear Fixture Installation Instructions

LED INSERTION FOR IN-FIELD ASSEMBLY INSTALLATION


STRIP IN EXTRUSION

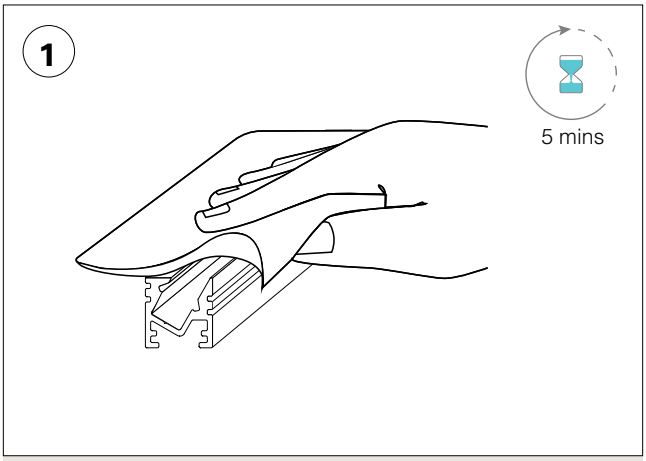


- Using a 50/50 alcohol mix throughly clean, the surface of the extrusion and the multi-tray surface. Allow time to dry (about 5 minutes).

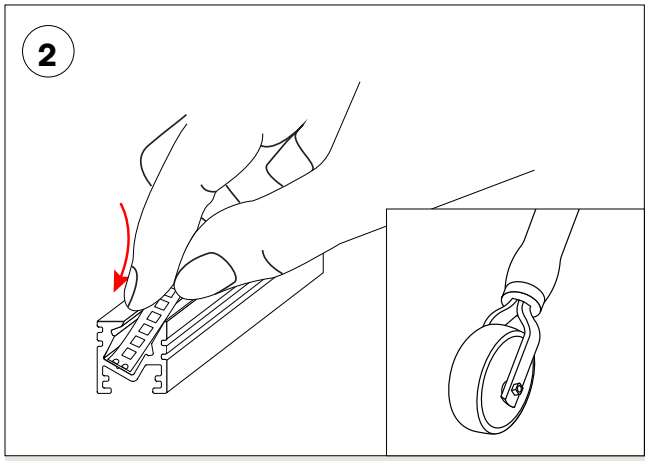

- Gently place LED in extrusion/tray. Apply firm pressure to fully adhere to the extrusion. This reduces the possibility that dust and debris will contaminate the adhesive.
- Use the UNI-ROLLER tool to place MICRO 5 LED strip into extrusion housing. If needed, you may order additional UNI-ROLLER tools.

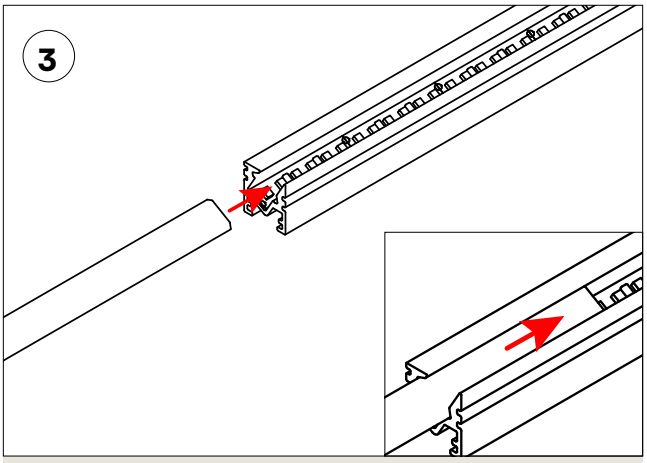

- Starting from one end of the extrusion, slide the lens into the grooved lip of the extrusion until secured in place.

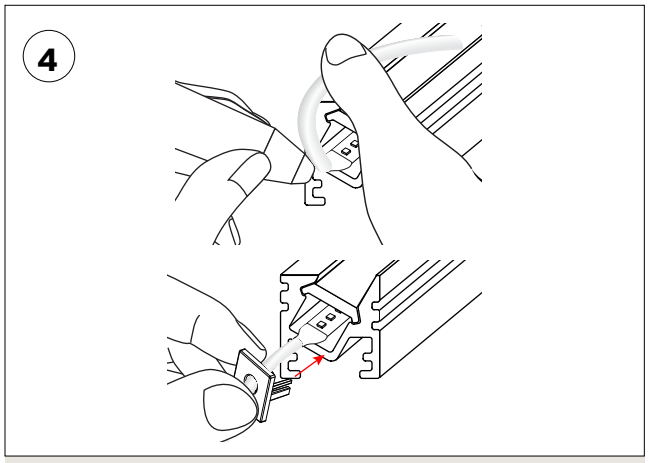

- Add glue inside the end cap and glue around edges to secure end cap in place. Do not allow glue to come in contact with LED.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


MICRO 5 POP MUD-IN

Linear Fixture Installation Instructions

SURFACE MOUNTING METHOD

SURFACE PREPARATION


1

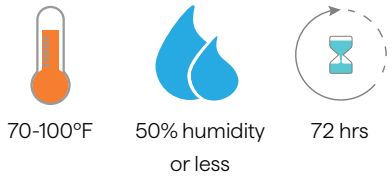

Temperature and environmental concerns:

- Ideal application environment is 70-100°F in 50% humidity or less.
- Minimum application temperature: 50°F
- This temperature and humidity should be maintained for 72 hours after application for maximum bond strength.


2

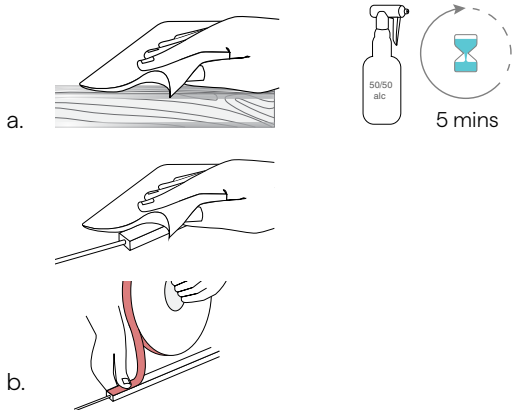

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the fixture and the surface area where fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

3

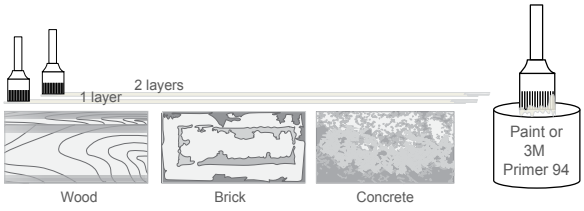

For porous materials (Wood, Brick, Concrete etc.) apply two layers of paint or primer to the surface. This will help create a better bonding surface for these materials. These can be purchased from a local hardware store.


MATERIALS	SUGGESTED EPOXIES
Concrete, Stone, Cinderblock, Metal, and Brick	Loctite Metal and Concrete Two-Part Epoxy
ABS, Fiberglass, Plastic, and PVC	Loctite Plastic Two-Part Epoxy
Tile, Wood, Ceramic, Glass, or Metal	Loctite Clear Two-Part Epoxy
All Purpose	Strong Stik

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP MUD-IN


Linear Fixture Installation Instructions

RECESSED MOUNTING METHOD: **MUD-IN SILICONE MOUNT**

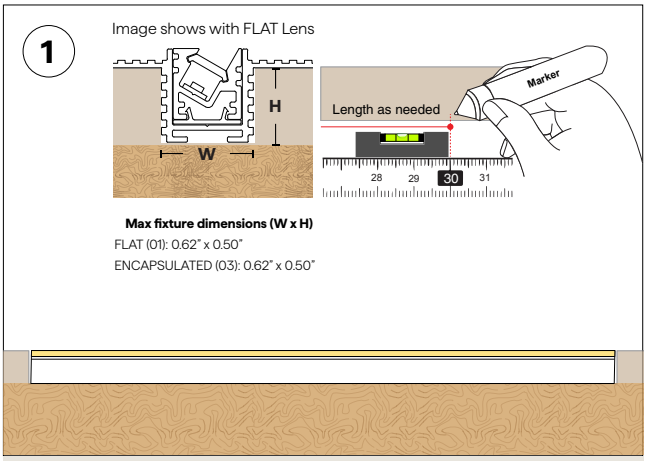


Determine the POP fixture(s) location and positioning on desired surface. Make any necessary reference markings.

NOTE: Depth of the channel is dependent on overall height. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

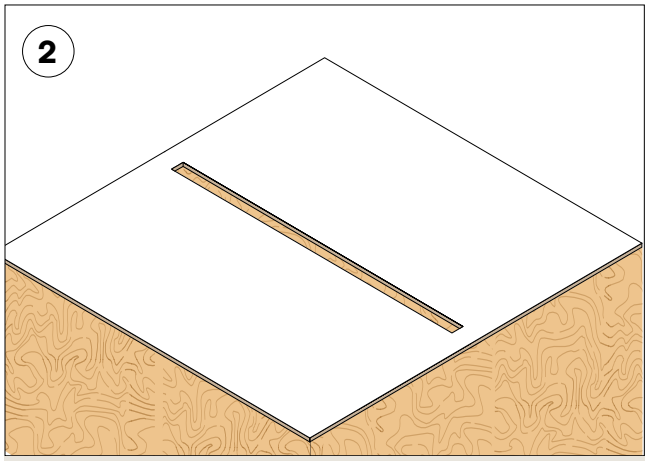


Cut the material so that there is slot for the mud-in channel to be mounted into. Drill out any desired wireways.

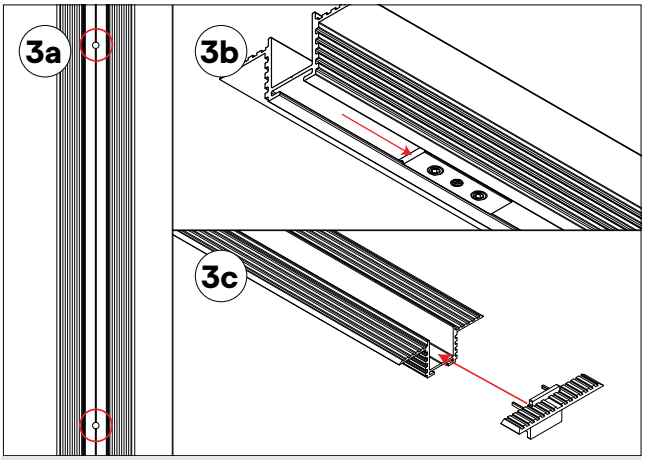

a. Pre-drill #6 holes into center of the mud-in channel track where PLC clips are desired

b. Slide in the MDIN-to-PLC piece within the mud-in channel. Utilize the set screws to secure them into place above the predrilled holes.

c. Insert the endcaps via the mud-in channel. Secure in place with glue

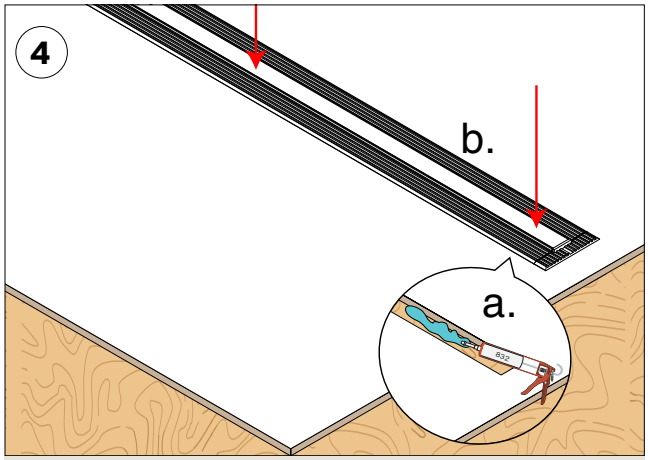


a. Apply silicone to all the sides walls and bottom surface of the drywall.

b. Place the mud-in channel into the drywall. Wait until the silicone completely cures.

NOTE: Cure time is dependent on the type of silicone adhesive used. Refer to silicone product manufacturer for accurate drying time.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

RECESSED MOUNTING METHOD: **MUD-IN SILICONE MOUNT CONTINUED**

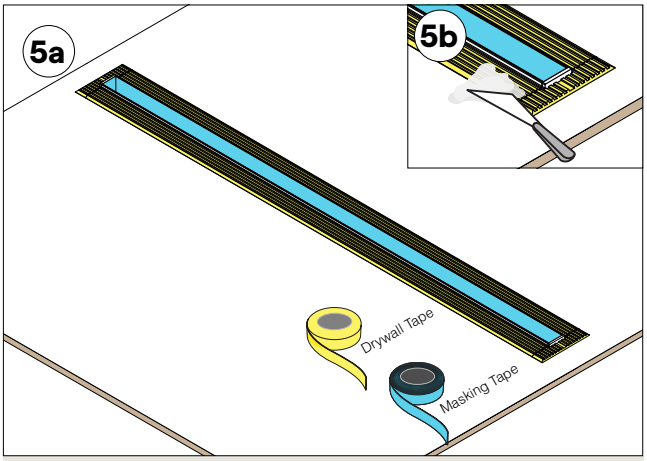


a. Prepare the mud in by covering the flanges with drywall tape. Cover the inside of the extrusion channel with masking tape.

b. Use the plaster to cover the extrusion's flanges. Then, smooth out until it has an even transition from plaster to wall surface.

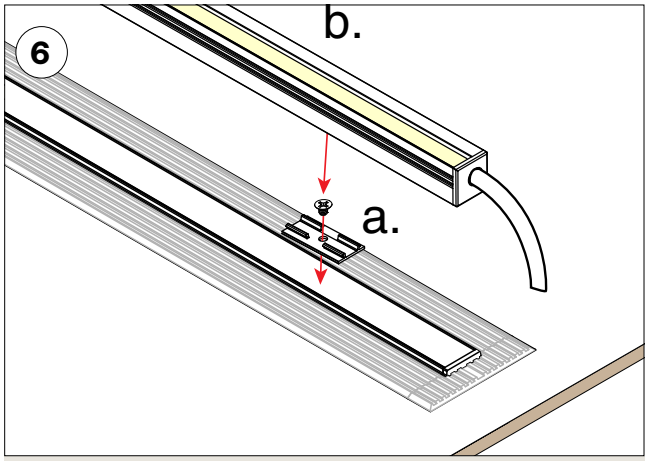

a. Align the PLC clips where the holes were predrilled into the mud-in channel. Then fasten clips in place with the provided screws

b. Install the POP fixture by feeding any wires through the wireways and snapping the fixture onto the PLC clips.

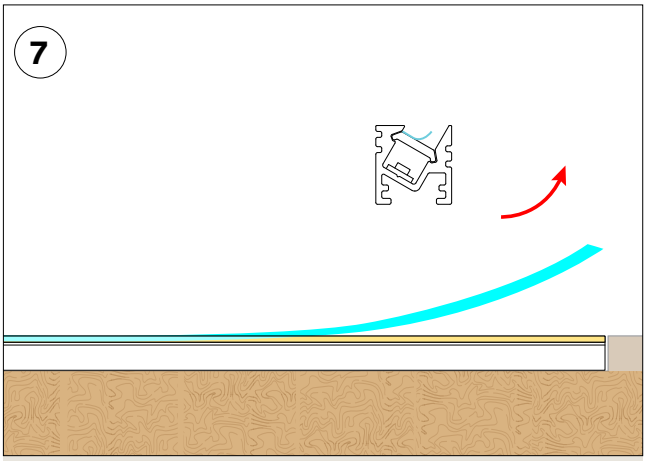


Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP MUD-IN


Linear Fixture Installation Instructions

RECESSED MOUNTING METHOD: **MUD-IN SCREW MOUNT**

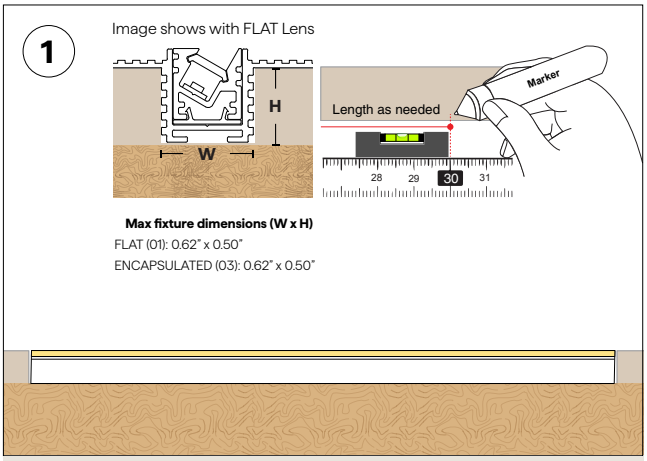


Determine the POP fixture(s) location and positioning on desired surface. Make any necessary reference markings.

NOTE: Depth of the channel is dependent on overall height. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

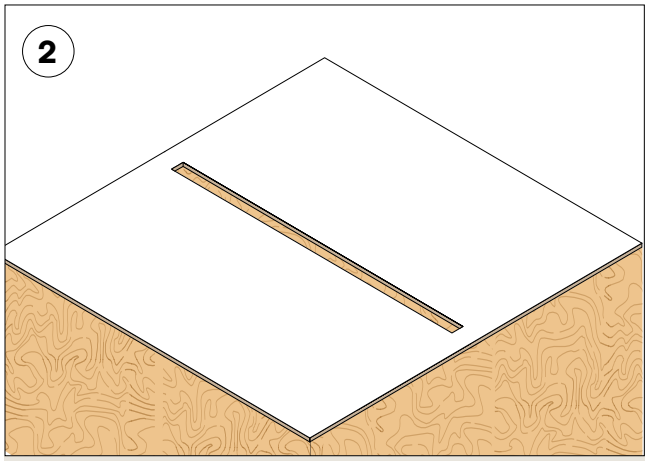


Cut the material so that there is a slot for the mud-in channel to be mounted into. Drill out any desired wireways.

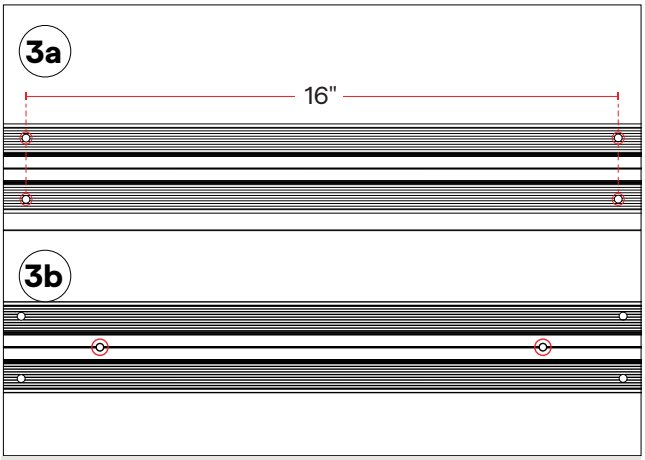

a. Pre-drill #6 holes in flanges of mud-in channel to align with studs for mounting onto surface

b. Pre-drill #6 holes into center of mud-in channel track where the PLCs are desired.

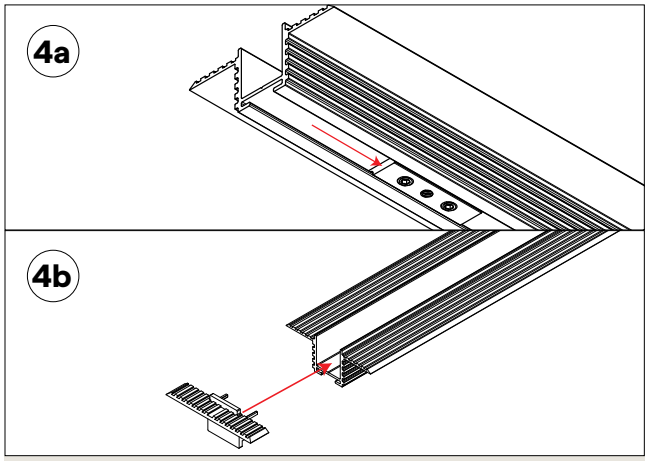


a. Slide in the MDIN-to-PLC piece within the mud-in channel. Utilize the set screws to secure them into place above the predrilled holes.


b. Insert the endcaps via the mud-in channel. Secure in place with glue

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

RECESSED MOUNTING METHOD: **MUD-IN SCREW MOUNT CONTINUED**

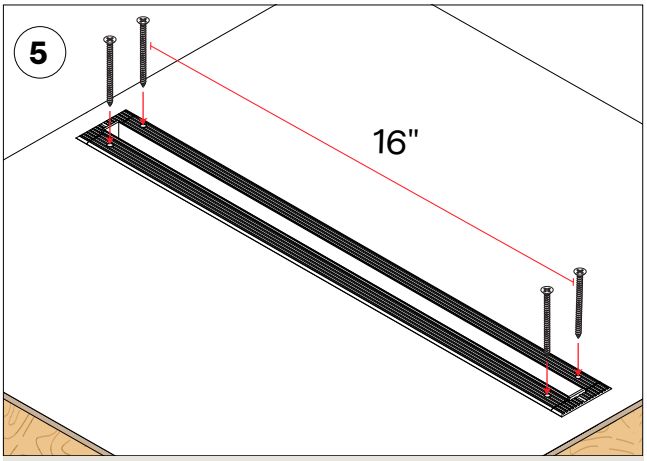


Place the mud-in channel in the slot and secure it by placing screws that align with studs through center of track.

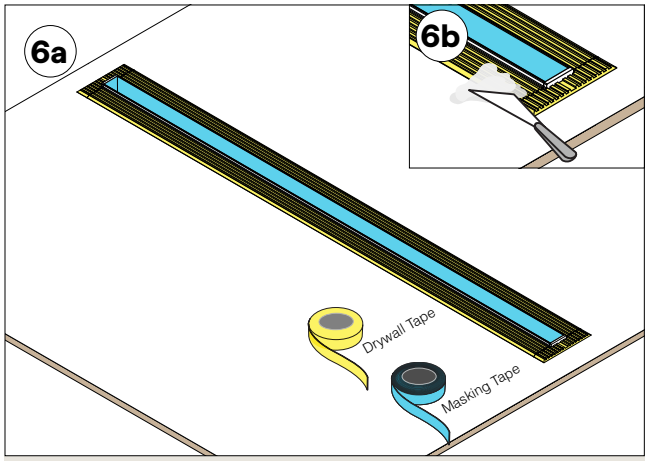


a. Prepare the mud in by covering the flanges with drywall tape. Cover the inside of the extrusion channel with masking tape.

b. Use the plaster to cover the extrusion's flanges. Then, smooth out until it has an even transition from plaster to wall surface.

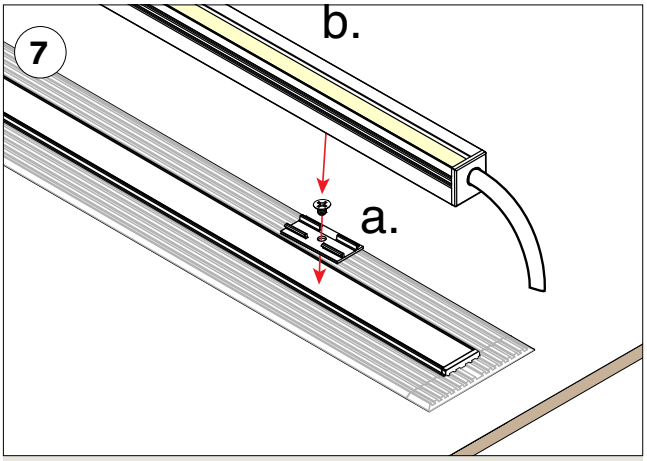

a. Align the PLC clips where the holes were predrilled into the mud-in channel. Then fasten clips in place with the provided screws

b. Install the POP fixture by feeding any wires through the wireways and snapping the fixture onto the PLC clips.

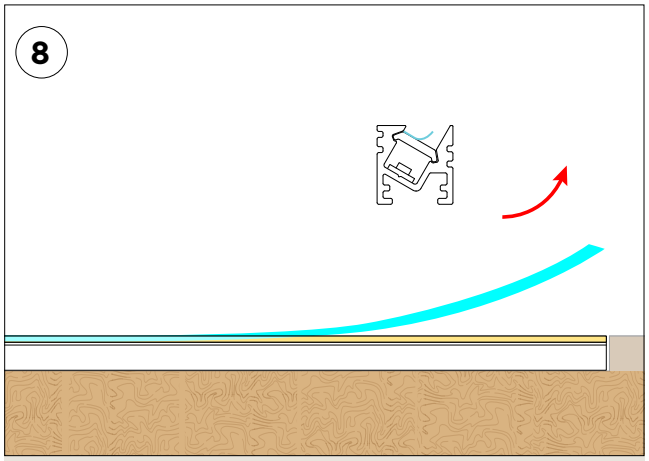

Remove protective film from the surface of the fixture's lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP MUD-IN

Linear Fixture Installation Instructions


RECESSED MOUNTING METHOD: **MUD-IN SPRING MOUNT**

- 2 clips provided for 4' or less. 4 clips provided for greater than 4'

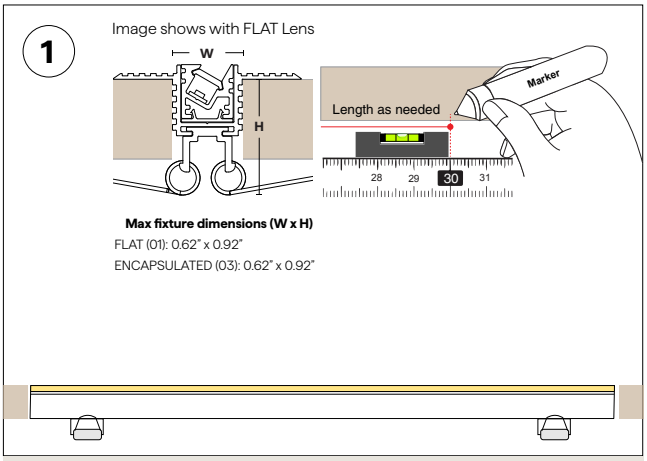


Determine the POP fixture(s) location and positioning on desired surface. Make any necessary reference markings.

NOTE: Depth of the channel is dependent on overall height. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

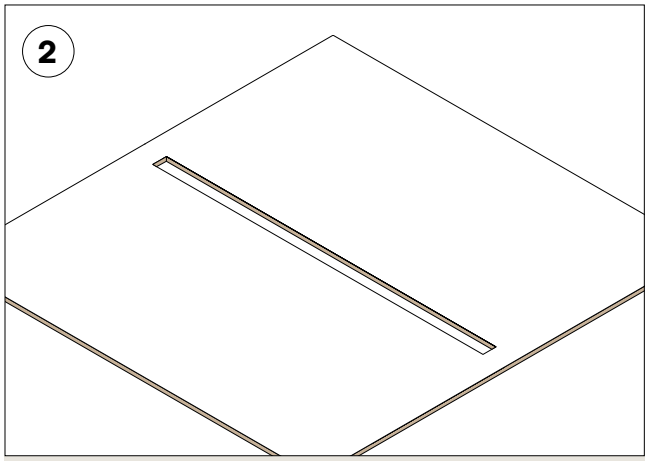


Cut the material so that there a slot for the mud-in channel to be mounted into. Drill out any desired wireways.

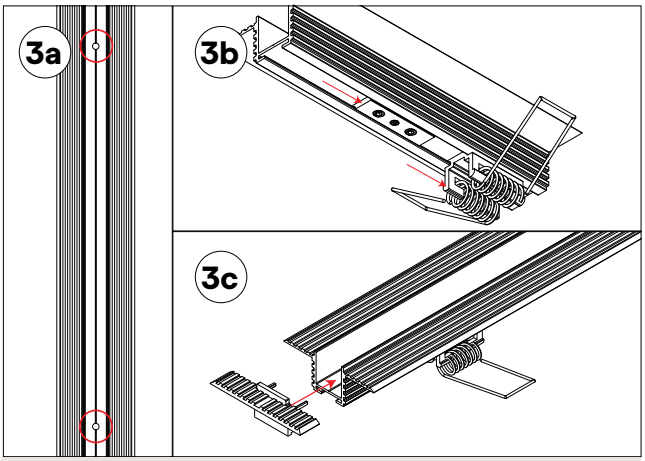

a. Pre-drill #6 holes into center of the mud-in channel track where PLC clips are desired

b. Slide in the MDIN-to-PLC piece within the mud-in channel. Utilize the set screws to secure them into place above the predrilled holes. In between each MDIN-to-PLC piece, insert a spring clip.

c. Insert the endcaps via the mud-in channel. Secure in place with glue

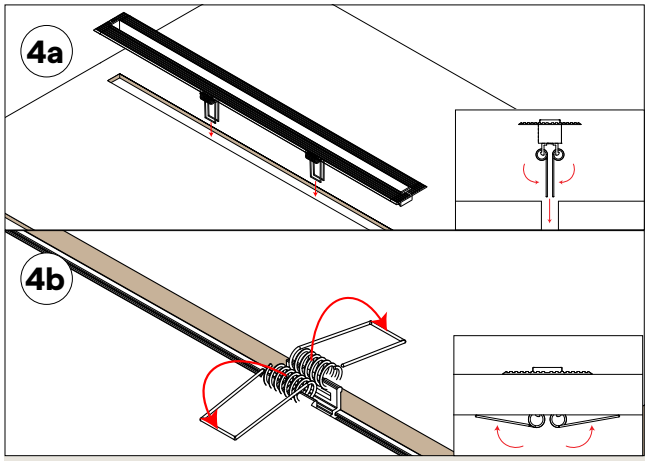


a. Flip down the spring clip arms so that they can fit through the routed slot. Slowly push down on mud-in channel.

b. Once the spring clip arms have passed through the material, they will automatically "spring" back up, and grip onto the backside of material.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

RECESSED MOUNTING METHOD: **MUD-IN SPRING MOUNT CONTINUED**

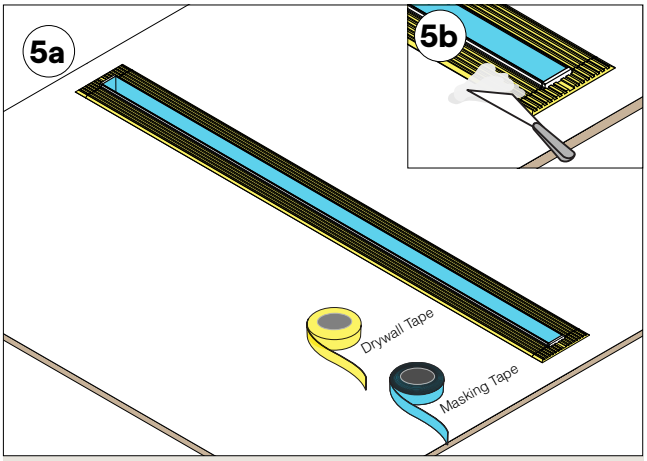


a. Prepare the mud in by covering the flanges with drywall tape. Cover the inside of the extrusion channel with masking tape.

b. Use the plaster to cover the extrusion's flanges. Then, smooth out until it has an even transition from plaster to wall surface.

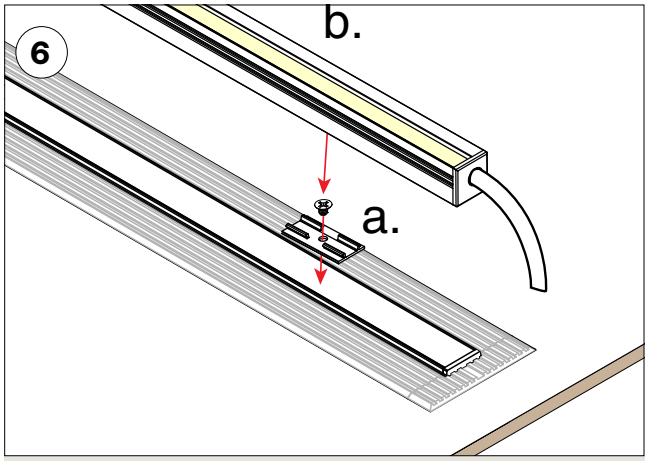

a. Align the PLC clips where the holes were predrilled into the mud-in channel. Then fasten clips in place with the provided screws

b. Install the POP fixture by feeding any wires through the wireways and snapping the fixture onto the PLC clips.

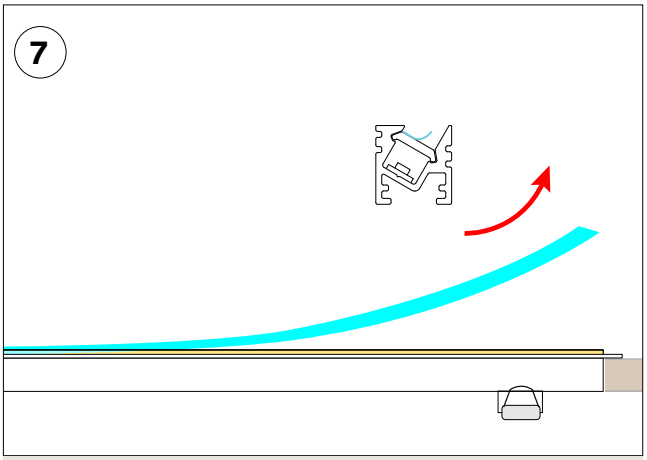

Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP-FLAT-DW(01)

Linear Fixtures Color Data

POP-01-DW-2.0-20-DRY-DF

2016 K

CRI: 92.8

CRI R9: 61.1

TM30 Rf: 89.2

TM30 Rg: 103.0

CQS: 79.4


X: 0.524


Y: 0.412


U: 0.304

V: 0.359

Δuv: -0.0004







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.6	96.5	96.3	93.9	93.1	97.4	91.0	81.0	61.1	90.0	96.0	90.0	94.5	96.1	88.5
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
74.6	83.9	81.2	82.0	79.9	75.4	74.3	78.2	86.2	83.2	83.5	83.1	82.9	78.5	76.6
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
90.0	88.6	87.3	88.7	90.2	88.2	85.9	88.4	90.6	93.5	92.0	89.8	90.1	74.8	86.7	88.4

TM30			
Hue Bin	R_f	Chroma	Hue
1	90	-4%	-1%
2	89	-4%	5%
3	87	-1%	7%
4	89	5%	7%
5	90	9%	5%
6	88	9%	1%
7	86	5%	-8%
8	88	1%	-9%
9	91	-2%	-5%
10	93	-4%	0%
11	92	0%	3%
12	90	2%	3%
13	90	6%	-8%
14	75	2%	-14%
15	87	1%	-10%
16	88	-4%	-7%

POP-01-DW-2.0-20-DRY-PR

2030 K

CRI: 93.0

CRI R9: 62.0

TM30 Rf: 88.4

TM30 Rg: 104.1

CQS: 79.0


X: 0.521


Y: 0.410


U: 0.303

V: 0.358

Δuv: -0.0011







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.0	96.8	96.5	93.9	93.5	97.5	90.8	81.3	62.0	90.6	95.8	91.1	94.9	96.2	89.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
74.0	84.3	81.0	82.2	80.4	75.0	72.4	76.5	85.9	82.9	82.6	81.8	81.7	79.6	77.1
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
90.0	87.7	85.7	86.6	88.5	86.5	83.8	86.6	89.7	93.4	91.6	89.4	89.8	74.5	86.2	88.4

TM30			
Hue Bin	R_f	Chroma	Hue
1	90	-4%	-1%
2	88	-3%	5%
3	86	0%	8%
4	87	7%	8%
5	89	11%	5%
6	87	11%	0%
7	84	6%	-9%
8	87	1%	-10%
9	90	-2%	-5%
10	93	-4%	0%
11	92	0%	4%
12	89	2%	3%
13	90	6%	-8%
14	75	2%	-14%
15	86	1%	-10%
16	88	-3%	-7%

POP-01-DW-2.0-27-DRY-DF

2758 K

CRI: 97.7

CRI R9: 96.9

TM30 Rf: 94.8

TM30 Rg: 100.5

CQS: 95.5


X: 0.455


Y: 0.408


U: 0.260

V: 0.350

Δuv: -0.0005







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.3	98.8	97.2	97.3	97.6	96.4	98.4	98.5	96.9	99.2	94.4	87.0	97.3	97.2	98.5
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.8	95.8	93.8	94.5	96.3	97.6	96.0	97.4	97.1	97.7	97.1	96.4	96.8	95.6	94.8
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.4	97.7	96.6	93.9	95.9	97.1	93.3	97.2	94.6	93.3	93.0	92.9	94.6	93.6	94.0	91.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	0%	1%
2	98	0%	-1%
3	97	0%	0%
4	94	-3%	-2%
5	96	-3%	1%
6	97	0%	2%
7	93	-2%	3%
8	97	1%	1%
9	95	1%	3%
10	93	2%	4%
11	93	3%	4%
12	93	4%	-1%
13	95	1%	-4%
14	94	3%	-4%
15	94	-2%	0%
16	91	1%	-7%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-08-24

MICRO 5 POP-FLAT-DW(01)

Linear Fixtures Color Data

POP-01-DW-2.0-27-DRY-PR

2759 K

CRI: 97.7

CRI R9: 96.3

TM30 Rf: 94.8

TM30 Rg: 100.5

CQS: 95.6


X: 0.454


Y: 0.408


U: 0.260

V: 0.350

Δuv: -0.0005







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.4	98.7	97.3	97.4	97.7	96.4	98.3	98.3	96.3	99.2	94.6	87.2	97.4	97.3	98.6
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.9	95.8	93.9	94.6	96.3	97.6	96.1	97.4	97.2	97.7	97.1	96.5	96.9	95.6	94.8
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.3	97.8	96.6	93.9	95.9	97.1	93.4	97.2	94.6	93.3	92.9	92.8	94.4	93.4	93.9	91.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	-1%
3	97	0%	0%
4	94	-3%	-2%
5	96	-3%	1%
6	97	0%	2%
7	93	-2%	3%
8	97	1%	2%
9	95	1%	3%
10	93	2%	4%
11	93	3%	4%
12	93	4%	-1%
13	94	1%	-4%
14	93	3%	-4%
15	94	-2%	0%
16	91	1%	-7%

POP-01-DW-2.0-30-DRY-DF

3061 K

CRI: 98.3

CRI R9: 96.3

TM30 Rf: 94.4

TM30 Rg: 100.5

CQS: 95.6


X: 0.432


Y: 0.401


U: 0.249

V: 0.346

Δuv: -0.0004







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.3	99.6	96.8	98.7	98.6	97.4	98.6	98.3	96.3	98.8	96.4	83.6	98.5	97.2	98.4
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.4	96.8	92.4	92.9	95.6	98.3	96.0	97.5	97.3	97.6	98.3	97.8	97.9	96.6	95.6
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.2	97.9	96.9	95.0	93.7	97.3	93.5	97.7	93.9	91.2	91.0	92.7	95.3	93.1	92.4	90.4

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-3%	-1%
5	94	-5%	1%
6	97	0%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	0%	4%
10	91	1%	5%
11	91	3%	6%
12	93	4%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%

POP-01-DW-2.0-30-DRY-PR

3076 K

CRI: 98.3

CRI R9: 95.7

TM30 Rf: 94.3

TM30 Rg: 100.6

CQS: 95.5


X: 0.431


Y: 0.401


U: 0.248

V: 0.346

Δuv: -0.0005







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.4	99.6	96.8	98.9	98.7	97.4	98.5	98.1	95.7	98.7	96.7	83.4	98.6	97.2	98.5
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.4	96.8	92.3	92.7	95.4	98.1	96.1	97.5	97.3	97.5	98.2	98.0	98.0	96.5	95.6
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.1	97.9	96.9	95.0	93.7	97.3	93.5	97.7	93.8	91.0	91.3	92.3	95.3	93.1	92.4	90.4

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-3%	-1%
5	94	-5%	1%
6	97	0%	1%
7	94	-2%	3%
8	98	0%	1%
9	94	0%	4%
10	91	1%	5%
11	91	3%	5%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-08-24

MICRO 5 POP-FLAT-DW(01)

Linear Fixtures Color Data

POP-01-DW-2.0-40-DRY-DF

4007 K

CRI: 97.4

CRI R9: 96.6

TM30 Rf: 92.6

TM30 Rg: 100.0

CQS: 94.9


X: 0.381


Y: 0.378


U: 0.225

V: 0.335

Δuv: 0.0004







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.9	98.5	94.5	98.6	97.0	95.0	98.9	97.7	96.6	94.3	97.5	72.5	99.1	96.4	96.6
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.1	99.3	89.1	88.6	93.1	95.9	96.7	98.6	97.2	97.5	97.9	99.2	99.2	99.1	97.1
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.2	97.5	96.1	93.1	91.7	96.2	94.5	93.5	90.0	87.7	86.2	91.9	95.2	94.5	90.5	90.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	95	0%	0%
2	97	0%	-1%
3	96	0%	0%
4	93	-3%	-1%
5	92	-5%	0%
6	96	-1%	1%
7	95	-3%	2%
8	93	-2%	4%
9	90	-1%	7%
10	88	0%	8%
11	86	4%	9%
12	92	3%	3%
13	95	3%	0%
14	94	3%	0%
15	91	3%	-3%
16	90	3%	-5%

POP-01-DW-2.0-40-DRY-PR

4007 K

CRI: 97.4

CRI R9: 97.5

TM30 Rf: 92.4

TM30 Rg: 100.0

CQS: 94.8


X: 0.381


Y: 0.378


U: 0.225

V: 0.335

Δuv: 0.0004







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.9	98.4	94.6	98.4	96.9	94.9	99.0	98.0	97.5	94.0	97.3	72.2	99.0	96.4	96.7
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.1	99.3	88.9	88.4	92.8	95.6	96.6	98.5	97.2	97.4	97.7	99.1	99.3	99.1	97.2
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.1	97.4	96.0	93.0	91.6	96.2	94.4	93.4	89.8	87.5	85.9	91.8	95.1	94.4	90.4	90.2

TM30			
Hue Bin	R_f	Chroma	Hue
1	95	0%	0%
2	97	0%	-1%
3	96	0%	0%
4	93	-3%	-1%
5	92	-5%	0%
6	96	-1%	1%
7	94	-3%	2%
8	93	-2%	4%
9	90	-1%	8%
10	87	0%	8%
11	86	4%	9%
12	92	3%	3%
13	95	3%	0%
14	94	3%	0%
15	90	3%	-3%
16	90	3%	-5%

POP-01-DW-2.0-55-DRY-DF

5586 K

CRI: 96.8

CRI R9: 98.2

TM30 Rf: 91.5

TM30 Rg: 98.5

CQS: 94.0


X: 0.331


Y: 0.345


U: 0.204

V: 0.319

Δuv: 0.0007







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.9	99.8	97.8	95.3	95.5	95.1	96.5	96.5	98.2	98.0	96.8	71.3	99.3	98.7	95.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.0	98.2	89.7	86.9	90.3	92.8	97.5	98.0	98.8	98.5	97.4	98.1	98.8	98.5	96.3
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
93.3	97.1	95.3	92.2	90.1	95.3	92.0	88.8	87.8	85.4	86.2	96.8	93.7	94.3	85.1	95.9

TM30			
Hue Bin	R_f	Chroma	Hue
1	93	-1%	1%
2	97	0%	0%
3	95	-1%	-1%
4	92	-3%	-2%
5	90	-7%	-2%
6	95	-3%	0%
7	92	-5%	2%
8	89	-3%	6%
9	88	-2%	11%
10	85	1%	9%
11	86	4%	8%
12	97	2%	0%
13	94	3%	-2%
14	94	0%	-2%
15	85	8%	-8%
16	96	-1%	1%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-08-24

MICRO 5 POP-FLAT-DW(01)

Linear Fixtures Color Data

POP-01-DW-2.0-55-DRY-PR

5596 K

CRI: 96.6

CRI R9: 98.3

TM30 Rf: 91.2

TM30 Rg: 98.2

CQS: 93.8


X: 0.330


Y: 0.345


U: 0.204

V: 0.319

Δuv: 0.0006







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.8	99.8	97.9	94.8	95.2	95.1	96.2	96.2	98.3	98.0	96.3	70.7	99.2	98.8	94.8
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
91.5	97.9	89.7	86.6	89.9	92.3	97.2	97.9	98.9	98.6	97.4	98.1	98.7	98.5	96.1
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
93.0	96.9	95.2	91.9	89.7	95.0	91.6	88.3	87.4	85.0	86.1	96.7	93.4	94.1	84.7	95.6

TM30			
Hue Bin	R_f	Chroma	Hue
1	93	-1%	1%
2	97	0%	0%
3	95	-1%	-1%
4	92	-3%	-2%
5	90	-7%	-2%
6	95	-3%	0%
7	92	-5%	3%
8	88	-4%	6%
9	87	-2%	12%
10	85	1%	10%
11	86	4%	8%
12	97	2%	0%
13	93	3%	-2%
14	94	0%	-2%
15	85	8%	-9%
16	96	-1%	1%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-08-24