

SD-L-LARGE

L BRACKET - ALUMINUM EXTRUSION





- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts a large family of fixtures, LED light engines, and SHIELD
- Paintable finish
- Suitable for indoor and outdoor use. Follow installation requirements for outdoor applications
- Mounting clips conveniently preinstalled for hassle-free installation
- Durable anodized aluminum

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENGTH (IN)
SD-L-LARGE			

Sample Part Number: **SD-L-LARGE-ST-SST-01-48"**

1 PRODUCT

SD-L-LARGE

2 FINISH

ST	Satin
BK	Black

3 MOUNTING


CC-01	Concealed Clip
WSC	White Snug Clip
VHB	VHB Tape
N/A	No Clip (For Light Engine)

Mounting clips preinstalled
See MOUNTING COMPATIBILTY CHART for more information


4 LENGTH (IN)

1" increments from 2" - 98.43"
Tolerance +0.0/-0.5"
Light engine ordered separately


1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES




Profile



profile with: OPTI-02 FT Lens



profile with: TORQ-01



profile with: VERS-09

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

SD-L-LARGE

L BRACKET - ALUMINUM EXTRUSION


2 FINISH

Satin

Black

3 MOUNTING


CC
(CC-01)



Concealed Clip

To order separately use CC-01 (sold in pairs)

WSC
(WSC)



White Snug Clip

To order separately use WSC

VHB TAPE
(TAPE-VHB-IP67-5)










Sold separately

10MM wide VHB Tape

To order separately use TAPE-VHB-IP67-5

COMPATIBILITY CHART

	 VEVE	 OPTI	 TORQ	 BOXA	 KURV	 ZALA	 VERS	 LIGHT ENGINE
Lens Notes	Works with: VEVE-01, VEVE-03	Works with: 40D lens, 60D lens, 70D lens, 90D lens, 110D lens, 155D lens, ASYM lens, FT Lens	Works with: TORQ-01, TORQ-03					
SST-01 Stainless Steel Clip		✓						
CC-01 Concealed Clip							✓	
WSC White Snug Clip				✓	✓	✓		
VHB	✓		✓	✓	✓	✓		
N/A								✓

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

SD-L-LARGE

L BRACKET - ALUMINUM EXTRUSION


LIGHT ENGINE COMPATIBILITY CHART

Chart shows LED strip compatibility without extrusion. Strips must be ordered separately

	STATIC WHITE (SW)	STATIC WHITE STOCKING DISTRIBUTOR (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	SHIELD STATIC WHITE (SHLD-SW)	SHIELD STATIC WHITE HIGH EFFICACY (SHLD-SW-HE)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 3.0, 5.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0, 8.0
DMP													
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 3.0, 5.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0

PHOTOMETRIC PERFORMANCE

Tested with SW24/4.0 at 3000K

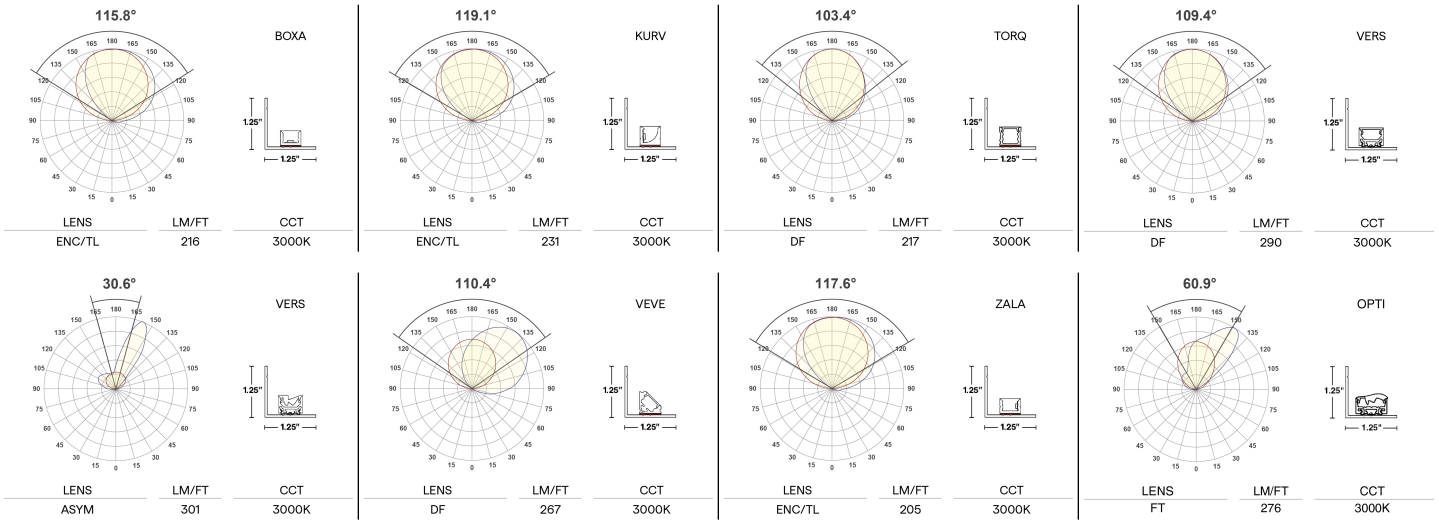

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting