

# SD-L-MEDIUM

L BRACKET - ALUMINUM EXTRUSION






- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts a large family of fixtures, LED light engines, and SHIELD
- Paintable finish
- Suitable for indoor and outdoor use. Follow installation requirements for outdoor applications
- Mounting clips conveniently preinstalled for hassle-free installation
- Durable anodized aluminum

| 1 PRODUCT | 2 FINISH | 3 MOUNTING | 4 LENGTH (IN) |
|---|---|---|---|
| SD-L-MEDIUM | | | |

Sample Part Number: **SD-L-MEDIUM-ST-VHB-48"**

**1 PRODUCT**

**SD-L-MEDIUM**

**2 FINISH**

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |

**3 MOUNTING**


| | |
|---|---|
| **VHB** | VHB Tape |
| **N/A** | No Clip (For Light Engine) |

Mounting clips preinstalled
See MOUNTING COMPATIBILTY CHART for more information


**4 LENGTH (IN)**

1" increments from 2" - 98.43"
Tolerance +0.0/-0.5"
Light engine ordered separately


## 1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES





Profile





profile with: ARKA-01





profile with: TELA-01





profile with: LALO-01




profile with: THIN-01




profile with: VEVE-01




profile with: WURM

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# SD-L-MEDIUM

L BRACKET - ALUMINUM EXTRUSION

## 2 FINISH

Satin

Black

## 3 MOUNTING

**VHB TAPE**
(TAPE-VHB-IP67-5)







Sold separately

10MM wide VHB Tape

To order separately use
TAPE-VHB-IP67-5

## COMPATIBILITY CHART

| |  ARKA |  TELA |  LALO |  THIN |  VEVE |  WURM |  LIGHT ENGINE |
|---|---|---|---|---|---|---|---|
| Lens Notes | Works with: ARKA-01 | Works with: TELA-01 | Works with: LALO-01, LALO-03 | Works with: THIN-01 | Works with: VEVE-01, VEVE-03 | | |
| VHB | ✔ | ✔ | ✔ | ✔ | ✔ | ✔ | |
| N/A | | | | | | | ✔ |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# SD-L-MEDIUM

L BRACKET - ALUMINUM EXTRUSION


## LIGHT ENGINE COMPATIBILITY CHART

Chart shows LED strip compatibility without extrusion. Strips must be ordered separately


| | STATIC WHITE (SW) | STATIC WHITE STOCKING DISTRIBUTOR (SD-SW) | STATIC WHITE HIGH EFFICACY (SW-HE) | STATIC WHITE HIGH EFFICACY PLUS (SW-HE+) | STATIC WHITE EXTREME TEMP (SW-XT) | SHIELD STATIC WHITE (SHLD-SW) | SHIELD STATIC WHITE HIGH EFFICACY (SHLD-SW-HE) | DYNAMIC WHITE HIGH EFFICACY (DW-HE) | WARM DIM (WD) | STATIC COLOR (SC) | RGB | RGBW | RGBW HIGH EFFICACY (RGBW-HE) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **DRY** | ✓ W/FT: 1.5, 3.0, 4.0, 5.0 | ✓ W/FT: 1.0, 2.0, 4.0, 6.0 | ✓ W/FT: 1.5, 3.0, 6.0, 9.0 | ✓ W/FT: 3.0, 6.0 | | ✓ W/FT: 1.5, 3.0, 5.0 | ✓ W/FT: 1.5, 3.0, 6.0 | ✓ W/FT: 1.5, 2.5, 4.0 | ✓ W/FT: 6.0 | ✓ W/FT: 5.0 | ✓ W/FT: 6.0 | ✓ W/FT: 6.0 | ✓ W/FT: 4.0, 8.0 |
| **DMP** | | | | | | | | | | | | | |
| **WET** | ✓ W/FT: 1.5, 3.0, 4.0, 5.0 | ✓ W/FT: 1.0, 2.0, 4.0, 6.0 | ✓ W/FT: 1.5, 3.0, 6.0 | ✓ W/FT: 3.0, 6.0 | ✓ W/FT: 3.0 | ✓ W/FT: 1.5, 3.0, 5.0 | ✓ W/FT: 1.5, 3.0, 6.0 | ✓ W/FT: 1.5, 2.5 | ✓ W/FT: 6.0 | ✓ W/FT: 5.0 | ✓ W/FT: 6.0 | ✓ W/FT: 6.0 | ✓ W/FT: 4.0 |

## PHOTOMETRIC PERFORMANCE

Tested with SW24/5.0 at 3000K & MICRO-SW24/4.0 at 3000K

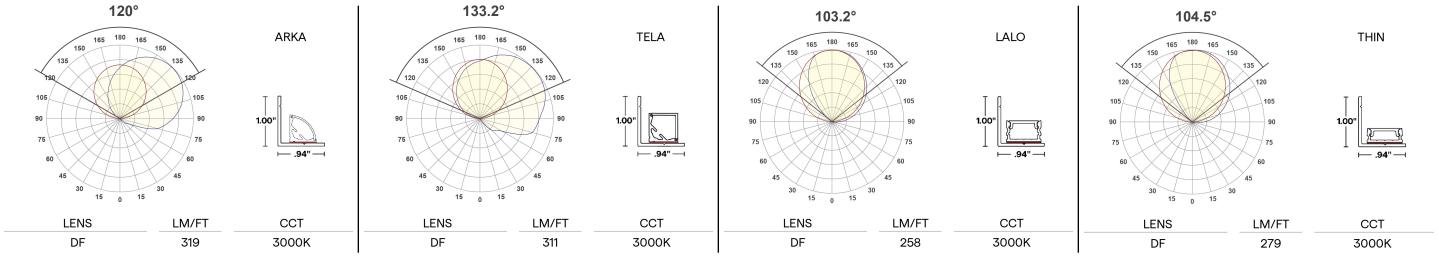


| | ARKA | TELA | LALO | THIN |
|---|---|---|---|---|
| LENS | DF | DF | DF | DF |
| LM/FT | 319 | 311 | 258 | 279 |
| CCT | 3000K | 3000K | 3000K | 3000K |

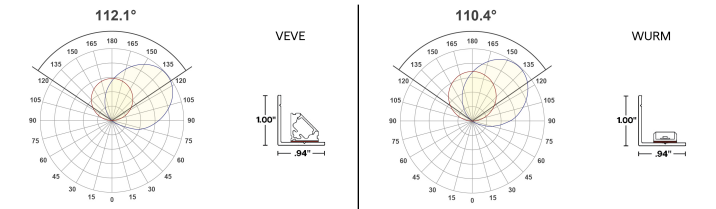


| | VEVE | WURM |
|---|---|---|
| LENS | DF | ENC/TL |
| LM/FT | 272 | 226 |
| CCT | 3000K | 3000K |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting