

# MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed






- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Suitable for indoor and outdoor locations
- 48% smaller than QTL's standard size extrusion (MDIN)
- Delivers equivalent efficacy as standard size fixtures
- Once installed, its wings are covered with tape and compound to create a seamless look
- Red, Green, and Blue LED allows for color changing applications

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS |
|---|---|---|---|---|
| SLITE-03-RGB | 4.0 | RGB | ENC | |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 6 WIRE INPUT/ OUTPUT | 7 CONNECTOR/ WIRE IN | 8 CONNECTOR/ WIRE OUT | 9 WIRE COLOR | 10 WIRE TYPE | 11 MOUNTING | 12 FINISH | 13 LENGTH (IN) | 14 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | | | | | SC | | | |

Sample Part Number: **SLITE-03-RGB-4.0-RGB-ENC-TL-S1-BW-CLS-WH-CL2-SC-ST-48"-E**

### 1 PRODUCT

**SLITE-03-RGB**

See following pages for compatible power supplies.

### 2 WATTS/FT

**4.0** 4.0W/ft

### 3 CCT

**RGB**

### 4 RATED

**ENC** IP67

### 5 LENS

**CL** Clear
**TL** Translucent

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

### 6 WIRE INPUT/OUTPUT

**SINGLE (Input only)**
**S1** End Feed
**S2** Bottom Feed

For continuous mounting, consider bottom feed.

**PASS THROUGH (Input/output)**
**P1** End Feed
**P2** Bottom Feed

For continuous mounting, consider bottom feed.

### 7 CONNECTOR/WIRE IN

**BW** Bare Wire (Standard 24")
**CON6** Connector 6"
**CON24** Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

**BW** Bare Wire (Standard 24")
**CON6** Connector 6"
**CON24** Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 8 CONNECTOR/WIRE OUT

**CLS** Closed End (No feed)

**BW** Bare Wire (Standard 24")
**CON6** Connector 6"
**CON24** Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 9 WIRE COLOR

**WH** White
**BK** Black

### 10 WIRE TYPE

**CL2** Class 2
**CL2P** Plenum Rated

CL2P only available with bare wire leads (BW)

### 11 MOUNTING

**SC** Screw

### 12 FINISH

**ST** Satin
**CU** Custom

Custom finishes require a longer lead time, consult factory

### 13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

### 14 EXACT/OPTIMAL

**E** Exact specified length
**O** Optimal illumination

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


# MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

## 1 PRODUCT - DIMENSIONS





Installed mud-in profile with snap-in fixture




Mud-in profile




Snap-in fixture profile




Installed with screws

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with SLITE-03-RGB-4.0-RGB-ENC

| | Red | | Green | | Blue | | All |
|---|---|---|---|---|---|---|---|
| | LM/FT | Wavelength | LM/FT | Wavelength | LM/FT | Wavelength | LM/FT |
| CL | 23 | 628 | 73 | 524 | 22 | 469 | 106 |
| TL | 19 | 629 | 58 | 524 | 17 | 468 | 84 |

## 5 DIODE VISIBILITY




ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




ENC/CL in green

## TEMPERATURE RATINGS

| | 4.0 W/FT | |
|---|---|---|
| | Min | Max |
| Ambient Operating Temp - Recessed | -4°F | 100°F |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed


## 6 WIRE INPUT/OUTPUT

SINGLE (Input only)





End Feed | Bottom Feed

PASS THROUGH (Input/Output)





End Feed | Bottom Feed


## CONFIGURATION OPTIONS





Single End Feed





Non-Continuous End Feed

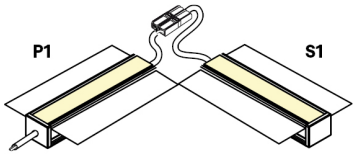


Non-Continuous Corner Feed





Continuous Bottom Feed




Continuous End to End Feed

## 7/8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out





Bare Wire 24"
22 AWG




6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed

## 9 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-07-26

# MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

## 11 MOUNTING

**SC**




Screw

#8 Flat head screw

## 12 FINISH

Satin


Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

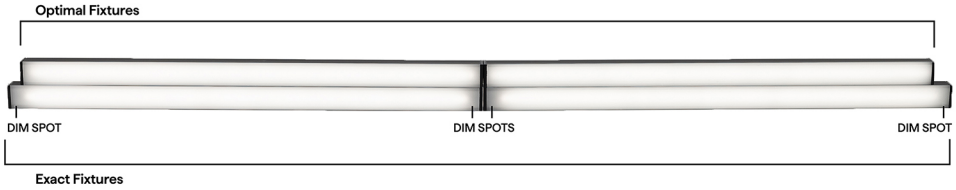



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# MICRO 5 SLITE-ENCAPSULATED (03) RGB





24VDC Linear Fixtures - Recessed

## RGB ENC LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |
|---|---|
| |   End Feed |
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 | S2 | P1 | P2 |
|---|---|---|---|---|
| |   End Feed |   Bottom Feed |   End Feed |   Bottom Feed |
| 12" | 10.48" | 10.61" | 10.83" | 11.08" |
| 13" | 12.48" | 12.61" | 12.83" | 11.08" |
| 14" | 12.48" | 12.61" | 12.83" | 13.08" |
| 15" | 14.48" | 14.61" | 14.83" | 13.08" |
| 16" | 14.48" | 14.61" | 14.83" | 15.08" |
| 17" | 16.48" | 16.61" | 16.83" | 15.08" |
| 18" | 16.48" | 16.61" | 16.83" | 17.08" |
| 19" | 18.48" | 18.61" | 18.83" | 17.08" |
| 20" | 18.48" | 18.61" | 18.83" | 19.08" |
| 21" | 20.48" | 20.61" | 20.83" | 19.08" |
| 22" | 20.48" | 20.61" | 20.83" | 21.08" |
| 23" | 22.48" | 22.61" | 22.83" | 21.08" |
| 24" | 22.48" | 22.61" | 22.83" | 23.08" |
| 36" | 34.48" | 34.61" | 34.83" | 35.08" |
| 48" | 46.48" | 46.61" | 46.83" | 47.08" |
| 60" | 58.48" | 58.61" | 58.83" | 59.08" |
| 72" | 70.48" | 70.61" | 70.83" | 71.08" |
| 84" | 82.48" | 82.61" | 82.83" | 83.08" |
| 96" | 94.48" | 94.61" | 94.83" | 95.08" |

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | OUTDOOR |
|---|---|---|
| | MICRO 5-RGB | MICRO 5-RGB |
| 0.1% | QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DMX<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DMX<br>QZ-DMX | Q-SET-QZ-DMX<br>QOM-eLED+DALI-DT8<br>QOM-eLED+DALI-DT8-PS<br>QOM-eLED+DMX<br>QZ-DMX |
| 1% | QZ-DALI-DT8 | Q-SET+QZ-DALI-DT8<br>QZ-DALI-DT8 |
| 10% | Non-Dim Power Supply with RGB App Dongle | |

| DIMMING PROTOCOL | INDOOR | OUTDOOR |
|---|---|---|
| | MICRO 5-RGB | MICRO 5-RGB |
| DMX | QTM-eLED+DMX<br>QZ-DMX | Q-SET-QZ-DMX<br>QOM-eLED+DMX<br>QZ-DMX |
| DALI-2: DT8 | QT-CAB-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8<br>QZ-DALI-DT8 | Q-SET+QZ-DALI-DT8<br>QOM-eLED+DALI-DT8<br>QZ-DALI-DT8 |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J5**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**




Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**

Q-NFC

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting