

AY-3

Riser Stem





1 PRODUCT	2 MATERIAL	3 STEM LENGTH	4 NPS ADAPTER	5 FINISH
AY-3				

Sample Part Number: **AY-3-A-6-1-BKT**

1 PRODUCT

AY-3

2 MATERIAL

A 6061 Aluminum Anodized and Powder Coated

B Brass H59

SS Stainless Steel 316L

3 STEM LENGTH

1 1" Length
2 2" Length
3 3" Length
6 6" Length
9 9" Length
12 12" Length
18 18" Length
24 24" Length
30 30" Length
36 36" Length
42 42" Length
48 48" Length

6"-36" are standard. Other lengths will have longer lead times

4 NPS ADAPTER

1 One
2 Two

To connect riser to a female 1/2" NPS mount, a NPS Adapter will be required.

5 FINISH

BG Beige
BB Black Bronze
BK Black
BKT Black Texture
BZ Bronze
BZT Bronze Texture
SL Silver
WH White
CU Custom

Lead times differ. BZT ships from stock. All other standard finishes are made to order. Custom finishes: consult factory.

P Polished

Brass and Stainless Steel have longer lead times: consult factory

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-10-30-26

AY-3

Riser Stem

1 PRODUCT - DIMENSIONS



6"-36" are standard. Other lengths will have longer lead times



NPS ADAPTER


5 FINISH

ALUMINUM POWDER COAT FINISHES

Custom finishes require a longer lead time, consult factory.



BRASS AND STAINLESS STEEL POLISHED FINISHES



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ACCESSORIES




Landscape Lighting Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Diagrams for representation only and not to scale.

- ROTATIONAL ADAPTER (PAGE 2)
- AY-3 RISER POLE & NPS ADAPTER (PAGE 3)
- AY-7 (PAGE 4)

ACCESSORIES

			
With Water Protection	Elbow Joint	1/2 NPS	Length: 1'-48"
ROTATIONAL ADAPTER (RA)	AY-7	NPS ADAPTER	RISER POLE (AY-3)


COMPONENTS & HARDWARE

PROVIDED HARDWARE


	
M2.5 Allen Key	M4 Allen Key
ALLEN KEY	ALLEN KEY

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


ROTATIONAL ADAPTER INSTALLATION

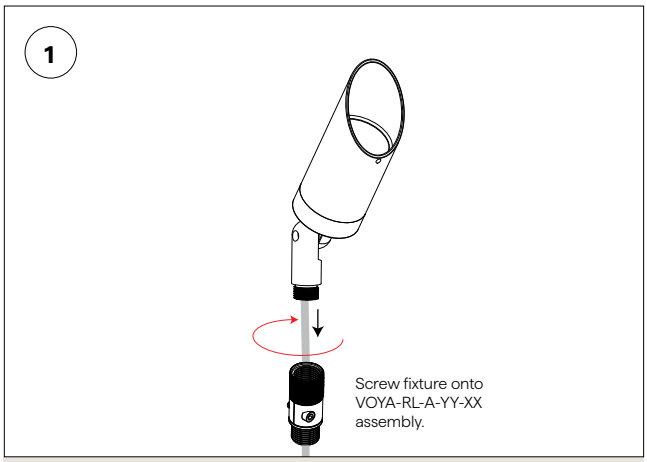


- Add Thread locker - (blue) 242 lock tite on fixture stem threads prior to installing.
- Feed Fixture wire through Rotational adapter as shown - and screw fixture clockwise into the adapter until fully engaged and seated.

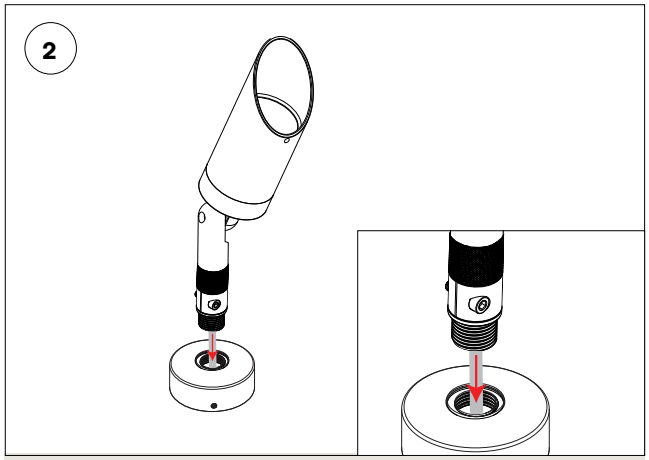

- Feed the fixture lead wire down through the moun of choice.
- Splice and connect wires per fixture and mount installation instructions. See each fixture type and mount install guide.

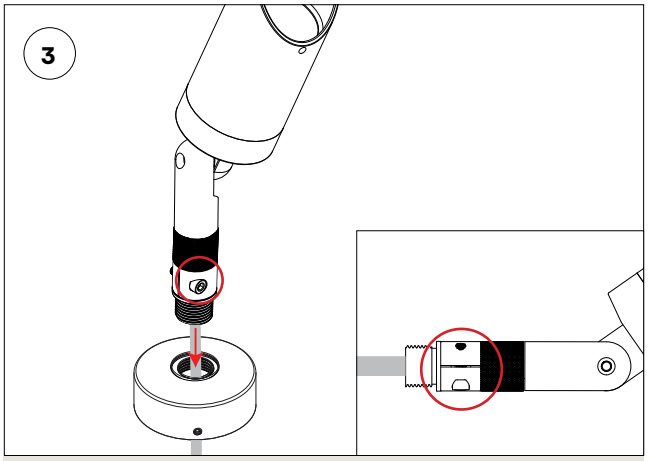

- Free 180° rotation and lock screw.

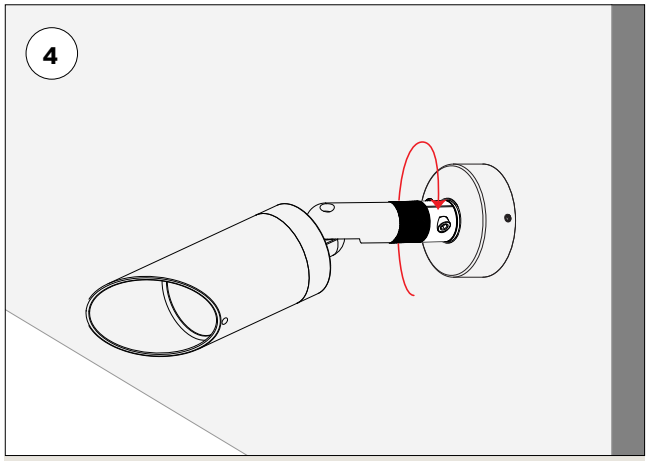


NOTE: *Adjust your aim angle before locking position.*


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

AY-3 RISER POLE & NPS ADAPTER INSTALLATION

SINGLE RISER

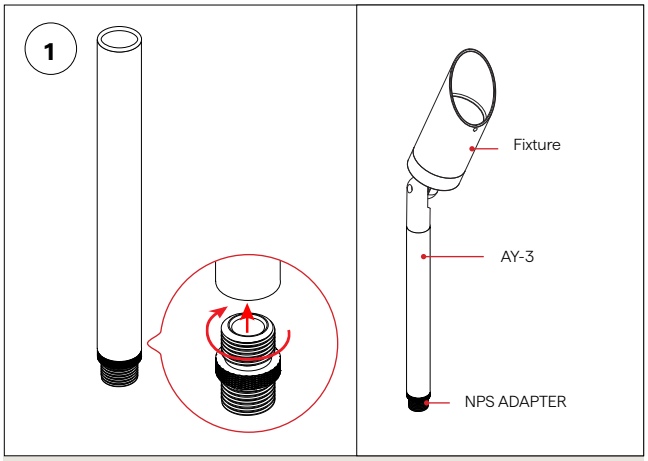


- **To Install:** Align the NPS ADAPTER with the riser and rotate clockwise until fully engaged and seated against the stop.

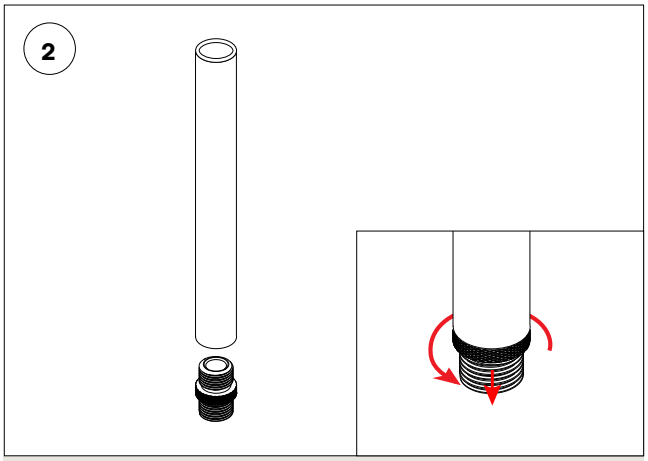


- **To Remove:** Rotate counterclockwise until the connection is disengaged, then lift off the riser.

STACKING RISER - STEMS LONGER THAN 12", CONNECT MULTIPLE AY-3S

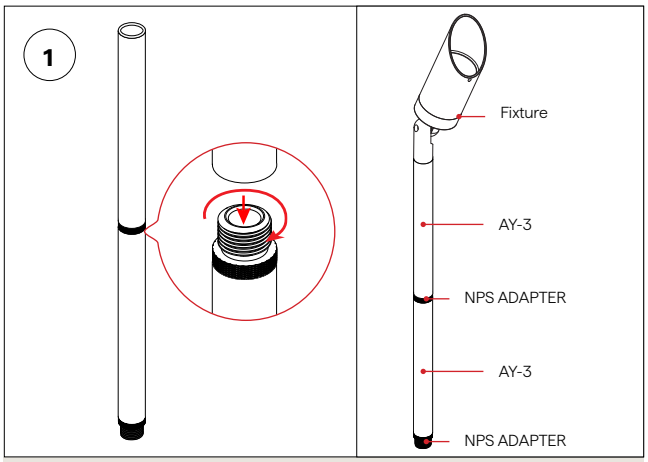


- **To Install:** Align the NPS ADAPTER with the lower riser and rotate clockwise until fully seated against the stop. Install the upper riser and rotate clockwise until fully seated against the stop.

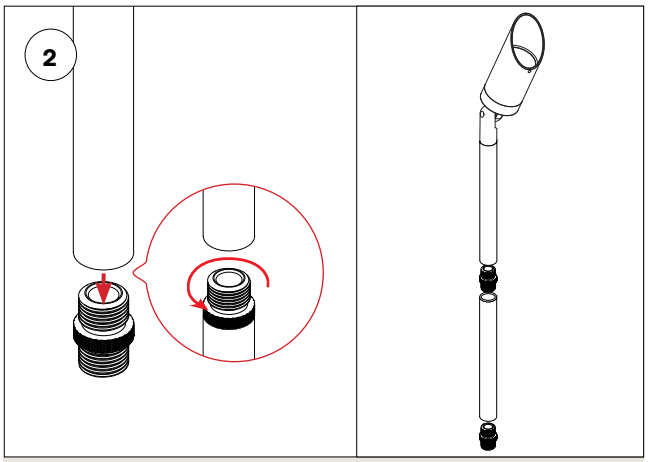

- **To Remove:** Rotate each connection counterclockwise until disengaged, then remove the upper riser followed by the NPS assembly.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

AY-7 INSTALLATION

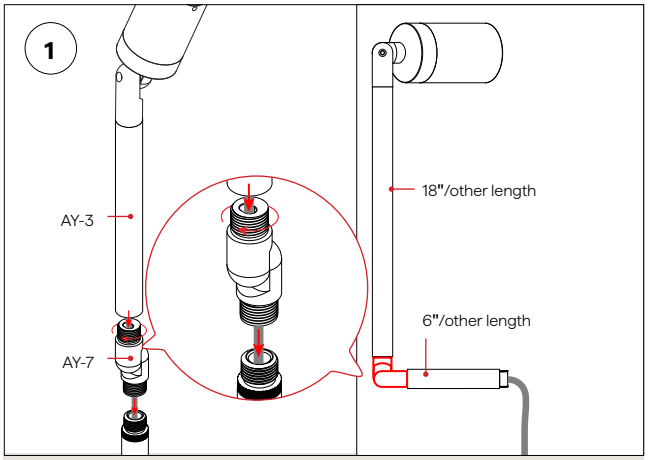

- Install AY3 riser on AY7 Elbow joint, twist riser clockwise to install.
- Weave fixture wire through riser and arm then through riser to mounted canopy or housing.

NOTE: *Order longer lead wire to achieve this Goose neck style installation.*

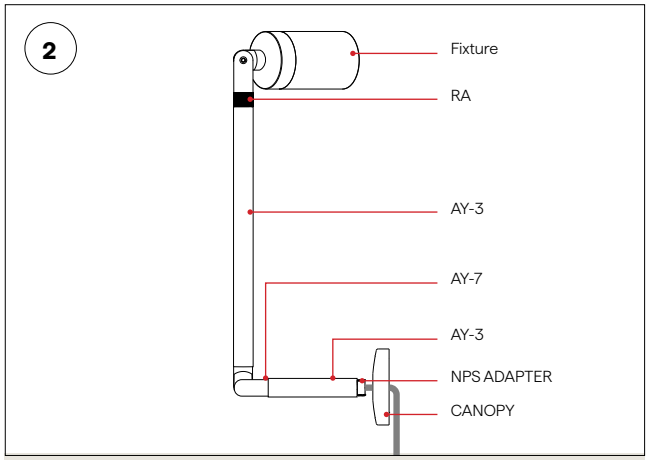

- Example of all accessories used to freely adjust the fixture as needed.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting