QTMS

12V or 24V AC Power Supply - 60W-750W



- Single power supply ranging from 60W to 750W
- Part of the QT Series, known for being the quietest, most efficient, safest, versatile, and longest-lasting power supplies in the industry
- Comes standard with five taps for fine-tuning voltage adjustments at the transformer to allow installers to fine-tune the voltages at the transformer
- UL listed for surface or recess mounting
- Can be installed into a 2"x4" stud wall
- Compatible with various thicknesses of drywall
- Provides reliable and consistent power supply for AC lighting applications

ORDERING PROCESS

A Specify housing

B Specify power supply tray details

A. HOUSING

A1 PRODUCT	A2 COLOR
QTM	

Sample Part Number: **QTM-WH**

B. POWER SUPPLY TRAY DETAILS

B1 PRODUCT	B2 WATTAGE	B3 PRIMARY VOLTAGE	B4 SECONDARY VOLTAGE	B5 NUMBER OF BREAKERS	B6 BREAKER AMPERAGE	B7 CHOKE	B8 ASSEMBLY	B9 COLOR	B10 OPTIONS
QTMS									

Sample Part Number: **QTMS-60MV-120-12V-1-5-CK-S-FA-WH-SP**

A1 PRODUCT

QTM

A2 COLOR

WH White (Standard)
BK Black Powder Coat Finish

B1 PRODUCT

QTMS

B2 WATTAGE

60MV
100MV
150MV
300MV
500MV
600MV
750MV

B3 PRIMARY VOLTAGE

120 60Hz
230 50/60Hz
240 50Hz
277 60Hz

230 & 277 are not standard, call for pricing

B4 SECONDARY VOLTAGE

12V
24V
120V

120V is not standard, call for pricing

B5 NUMBER OF BREAKERS

1
2
3
4
5
6

B6 BREAKER AMPERAGE

5
10
12.5
15
20
25

B7 CHOKE

CK-S 150W-300W
CK-L 375W-600W

B8 ASSEMBLY

FA Factory Assembled
NI Not Installed

Select NI to receive the housing before the power supply tray ships.

B9 CORRELATED HOUSING COLOR

WH White (Standard)
BK Black Powder Coat Finish

BK is not standard, call for pricing

B10 OPTIONS

CP Cord & Plug
SP Switch Plate
TP Timer Plate
DP Dimmer Plate
ST Secondary Tap
N/A

PRODUCT INFORMATION

- UL 2108 & 1598 listed
- Surface, ceiling or wall mount
- Recessed wall mount type IC
- Suitable for use in insulated space — zero clearance
- Suitable for use in closets with clothes in direct contact
- Inherently protected type IC for supply connections use wire rated for at least 75˚C
- Suitable for indoor use only
- Suitable for damp locations
- Use dimmers rated for magnetic low voltage load
- Complies with N.E.C. article 411
- Isolation toroidal transformer
- 50/60 cycle A.C. only
- 10 year warranty

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QTMS

12V or 24V AC Power Supply - 60W-750W

VOLTAGE DROP CHART

Distances shown reflect a 5% voltage drop (95% of rated voltage delivered) — the maximum recommended run.

24V SYSTEM

No Dimming - use primary tap #1

SECONDARY TAP 2, 24V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	688	432	272	171
100	344	216	136	86
150	229	144	91	57
200	172	108	68	43
250	138	86	54	34
300	115	72	45	29
350	98	62	39	24
400	86	54	34	
450	76	48	30	
500	69	43		
550	63	39		
600	57	36		

With Dimming - use primary tap #2

SECONDARY TAP 2, 22V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
TAP 2 NOT RECOMMENDED FOR USE WITH DIMMER				

SECONDARY TAP 3, 26V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	1452	913	574	361
100	726	456	287	181
150	484	304	191	120
200	363	228	143	90
250	290	183	115	72
300	242	152	96	60
350	207	130	82	52
400	182	114	72	
450	161	101	64	
500	145	91		
550	132	83		
600	121	76		

SECONDARY TAP 3, 24V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	608	383	240	151
100	304	191	120	76
150	203	128	80	50
200	152	96	60	38
250	122	77	48	30
300	101	64	40	25
350	87	55	34	22
400	76	48	30	
450	68	43	27	
500	61	38		
550	55	35		
600	51	32		

SECONDARY TAP 4, 28V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	2217	1393	876	552
100	1108	697	438	276
150	739	464	292	184
200	554	348	219	138
250	443	279	175	110
300	369	232	146	92
350	317	199	125	79
400	277	174	110	
450	246	155	97	
500	222	139		
550	202	127		
600	185	116		

SECONDARY TAP 4, 26V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	1309	823	517	326
100	655	412	259	163
150	436	274	172	109
200	327	206	129	81
250	262	165	103	65
300	218	137	86	54
350	187	118	74	47
400	164	103	65	
450	145	91	57	
500	131	82		
550	119	75		
600	109	69		

12V SYSTEM

No Dimming - use primary tap #1

SECONDARY TAP 2, 12V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	430	270	170	107
35	246	154	97	61
50	172	108	68	43
75	115	72	45	29
100	86	54	34	21
150	57	36	23	14
200	43	27	17	
240	36	23	14	
300	29	18		

With Dimming - use primary tap #2

SECONDARY TAP 2, 11V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
TAP 2 NOT RECOMMENDED FOR USE WITH DIMMER				

SECONDARY TAP 3, 13V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	908	571	359	226
35	519	326	205	129
50	363	228	143	90
75	242	152	96	60
100	182	114	72	45
150	121	76	48	30
200	91	57	36	
240	76	48	30	
300	61	38		

SECONDARY TAP 3, 12V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	380	239	150	95
35	217	137	86	54
50	152	96	60	38
75	101	64	40	25
100	76	48	30	19
150	51	32	20	13
200	38	24	15	
240	32	20	13	
300	25	16		

SECONDARY TAP 4, 14V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	1385	871	548	345
35	792	498	313	197
50	554	348	219	138
75	369	232	146	92
100	277	174	110	69
150	185	116	73	46
200	139	87	55	
240	115	73	46	
300	92	58		

SECONDARY TAP 4, 13V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	818	514	323	204
35	468	294	185	116
50	327	206	129	81
75	218	137	86	54
100	164	103	65	41
150	109	69	43	27
200	82	51	32	
240	68	43	27	
300	55	34		

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QTMS

12V or 24V AC Power Supply - 60W-750W

VOLTAGE DROP CHART CONTINUED

Distances shown reflect a 5% voltage drop (95% of rated voltage delivered) — the maximum recommended run.

24V SYSTEM

No Dimming - use primary tap #1

SECONDARY TAP 5, 30V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	2981	1874	1178	742
100	1490	937	589	371
150	994	625	393	247
200	745	468	295	185
250	596	375	236	148
300	497	312	196	124
350	426	268	168	106
400	373	234	147	
450	331	208	131	
500	298	187		
550	271	170		
600	248	156		

With Dimming - use primary tap #2

SECONDARY TAP 5, 28V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
50	2010	1264	794	500
100	1005	632	397	250
150	670	421	265	167
200	503	316	199	125
250	402	253	159	100
300	335	211	132	83
350	287	181	113	71
400	251	158	99	
450	223	140	88	
500	201	126		
550	183	115		
600	168	105		

12V SYSTEM


No Dimming - use primary tap #1


SECONDARY TAP 5, 15V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	1863	1171	736	464
35	1065	669	421	265
50	745	468	295	185
75	497	312	196	124
100	373	234	147	93
150	248	156	98	62
200	186	117	74	
240	155	98	61	
300	124	78		

With Dimming - use primary tap #2

SECONDARY TAP 5, 14V				
Load (W)	8 AWG	10 AWG	12 AWG	14 AWG
20	1256	790	497	313
35	718	451	284	179
50	503	316	199	125
75	335	211	132	83
100	251	158	99	63
150	168	105	66	42
200	126	79	50	
240	105	66	41	
300	84	53		

A1 PRODUCT - DIMENSIONS

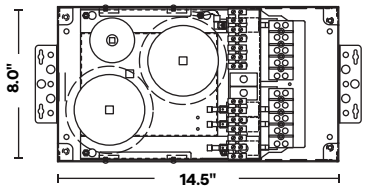



A2 COLOR

White (Standard)

Black Powder Coat Finish

B2 TECHNICAL INFORMATION

Wattage	Max Load (Watts)	PSC Efficiency	Max PSC Rating (Watts)	Max PSC Rating (VA)	Max Prim Amps @ 120V	Max Prim Amps @ 277V
60MV	60W	92%	66	78	0.5 A	0.28 A
100MV	100W	92%	108	125	1.1 A	0.46 A
150MV	150W	92%	162	175	1.5 A	0.70 A
300MV	300W	93%	321	347	2.9 A	1.30 A
500MV	500W	93%	535	578	4.8 A	2.10 A
600MV	600W	95%	630	680	5.7 A	2.50 A
750MV	750W	95%	788	851	7.1 A	3.10 A

Secondary Breaker Amperage

Amps	Max 12V Load	Max 24V Load	Wire Color
5	60W	120W	Orange
10	120W	240W	Red
12.5	150W	300W	Yellow
15	180W	360W	Yellow
20	240W	480W	Blue
25	300W	600W	Violet

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QTMS

12V or 24V AC Power Supply - 60W-750W

HOUSING

- 18-gauge welded steel enclosure: 8.0"W X 14.5"L X 4.0"D
- Door: 9.0"W X 15.5"L
- Knockouts: 21

MULTI-VOLT & TAPS

- Tap Options (in order from TAP1 to TAP5):
  - 12V: 11, 12, 13, 14, 15V
  - 24V: 22, 24, 26, 28, 30V
- AC inputs may be connected to one (1) of the primary taps of the PSC
- No derating required for incandescent and halogen loads
- 50% derating required for LED retrofit loads
- The advantage is that loads at varying distances from the PSC can be tapped on different taps to recover voltage drop, allowing you to get the correct voltage at your load and produce between 85%-100% light output. (See QTL Voltage drop Calculator)
- Secondary Circuit Protection: 1-2 magnetic circuit breakers
- Class 1 compliant to N.E.C.

TOROIDAL CHOKE

- QTL's standard choke, or "debuzzing coil" reduces noise when dimming and helps negate in-rush current that is prevalent with LED loads. It allows for quiet operation and eliminates nuisance tripping.


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting