

ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface





- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
			ENC	STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR / WIRE IN	9 CONNECTOR / WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/ OPTIMAL
			STD	STD			HSS			

Sample Part Number: **TO3DW-6.0-24/30-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-HSS-ST-48"-E**

1 PRODUCT

TO3DW
TO3DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2 WATTS/FT

1.5HE 1.5W/ft HE
2.5HE 2.5W/ft HE

3 CCT

22/30 2200K/3000K
22/35 2200K/3500K
24/30 2400K/3000K
24/40 2400K/4000K
27/40 2700K/4000K

4 RATED

ENC IP67

5 EFFICIENCY

STD Standard

6 LENS

CL Clear
TL Translucent

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed

For continuous mounting, consider bottom feed

8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 INPUT END CAP

STD Standard

STD - End cap matches fixture finish chosen

11 OUTPUT END CAP

STD Standard

STD - End cap matches fixture finish chosen

12 WIRE COLOR

WH White
BK Black

13 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

14 MOUNTING

HSS Hidden Stainless Steel Clip

15 FINISH

ST Satin
BK Black
CU Custom

Custom finishes require a longer lead time, consult factory

16 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

17 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-02-26

5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | IK10 rated


ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

1 PRODUCT - DIMENSIONS



Profile



Profile with hidden stainless steel mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with TO3DW-**-30-ENC-STD

	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
CL	110	98	174	98
TL	57	98	90	98

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS

	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F


7 WIRE INPUT/OUTPUT

SINGLE (Input only)



End Feed | Bottom Feed

PASS THROUGH (Input/Output)




End Feed | Bottom Feed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface


CONFIGURATION OPTIONS




Single End Feed



Non-Continuous End Feed



Continuous Bottom Feed




Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

BW




Bare Wire 24"
22 AWG

CON6/CON24



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

12 WIRE COLOR




White

Black

14 MOUNTING

HSS




Hidden Stainless
Steel Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SST-02

Each clip comes with a #4 x 5/8 Flat Head SS

15 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

17 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

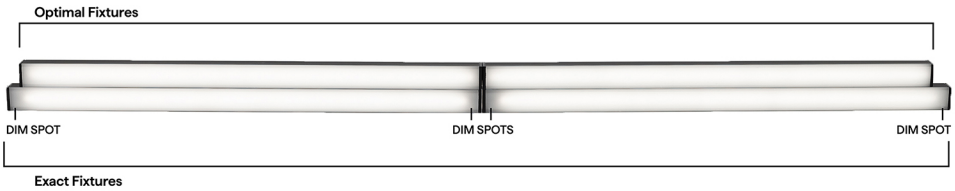


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS





24VDC Linear Fixtures - Surface

DW-HE ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	**DW-HE Tunable Applications**
0-10V	QT-CAB-eLED+TW QTM-eLED+TW	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory


Q-ANGLE



Adjustable mounting accessory

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-02-26

ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

COMPATIBLE APPS

NFC APP

Q-NFC

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


ESSENTIALS TALO

Linear Fixture Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Warranty only valid with QTL power supplies
- Surface mount
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale

METHODS OF INSTALLATION

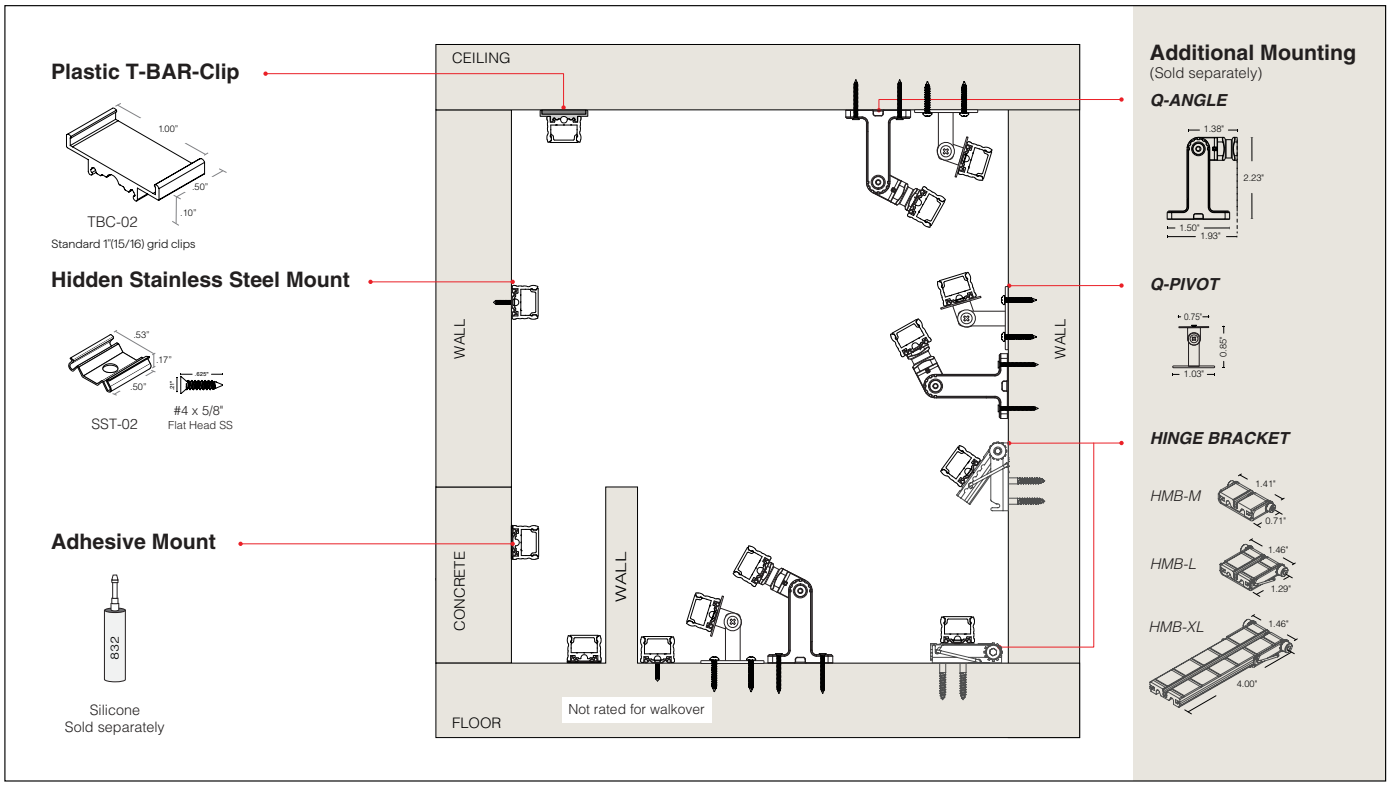


SURFACE MOUNTING METHOD

- Silicone Mount (page 4)
- Hidden Stainless Steel Clip Mount (page 5)
- Plastic T-BAR Clip Mount (page 6)


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS TALO

Linear Fixture Installation Instructions





TALO-FLAT (01)





TALO-ENCAPSULATED (03)

COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size


HIDDEN STAINLESS STEEL CLIP	PLASTIC T-BAR CLIP	
 SST-02 Included: Flat Head Screw #4x5/8"	 TBC-01 9/16" Flat or Tegular TB-grid clips	 TBC-02 15/16" Flat or Tegular TB-grid clips
• 2 clips provided for 4' or less; 4 clips provided for greater than 4"	• 2 Clips provided per first 12", 1 clip provided per additional foot.	• 2 Clips provided per first 12", 1 clip provided per additional foot.

ACCESSORIES SOLD SEPARATELY

HINGE BRACKET; sold individually	Q-ANGLE; sold in pairs	Q-PIVOT; sold in pairs
 Image shows HMB-M HMB-M HMB-L HMB-XL	 Q-ANGLE	 Q-PIVOT
Included: • 3/4" long mount screw • 1/4" #4 clip mount screw	Included: • 4 SS #6x1.25" Flat head wood screws • 2 SS 4-40 Flat head clip screws • 2 SS 6-32 Fillister screws	Included: • SS #4-40x3/16 Flat head screws • 2 #4x3/4 Pan Head screws

ADHESIVE SOLD SEPARATELY


SILICONE




DOWSIL 832

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


CONTINUOUS WIRING CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed



Continuous Bottom Feed



Continuous End to End Feed


Review wire method to ensure clean installation prior to mounting extrusion.

NOTE: Additional wire methods include:
S1, S2: Connector/Wire Input only
P1, P2: Connector/Wire Input and Output


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SILICONE**

- 2 clips provided for 4’ or less; 4 clips provided for greater than 4’

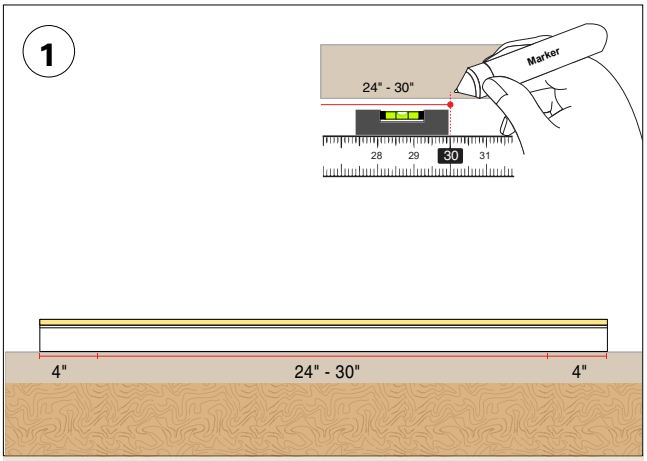

Determine the TALO fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24” - 30”.

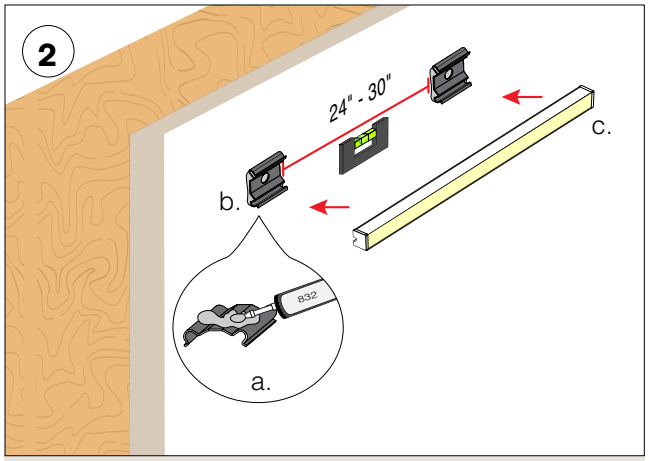


a. Firmly press the silicone-coated clips on the marked reference points.

b. Wait for silicone adhesive to cure completely before snapping fixture into place.

c. Snap fixture onto clips.

NOTE: Cure time is dependent on the type of silicone adhesive used. Refer to silicone product manufacturer for accurate drying time.

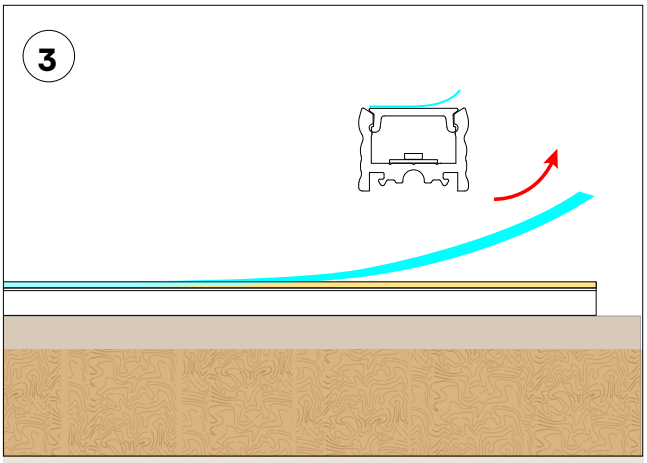


Remove protective film from the surface of the fixture’s lens.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **HIDDEN STAINLESS STEEL CLIPS**

- 2 clips provided for 4’ or less; 4 clips provided for greater than 4’

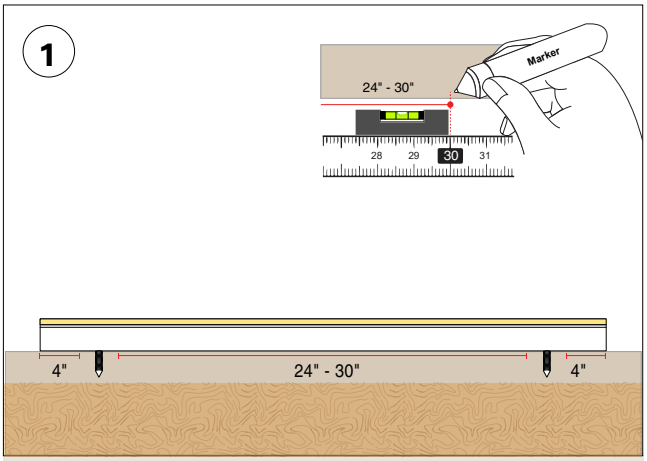

Determine the TALO fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24” - 30”.

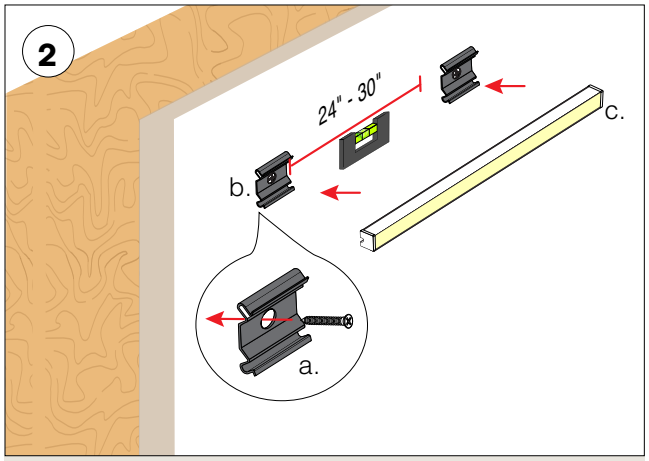


a. Secure clips using the #4 flat head hardware provided.

b. Ensure the screw head is flush with the clip’s base.

c. Snap fixture onto clips.

NOTE: Flat head screw type is dependent on surface/application material. Alternative flat head screws may be required. Refer to the surface material manufacturer for suggested screw type.

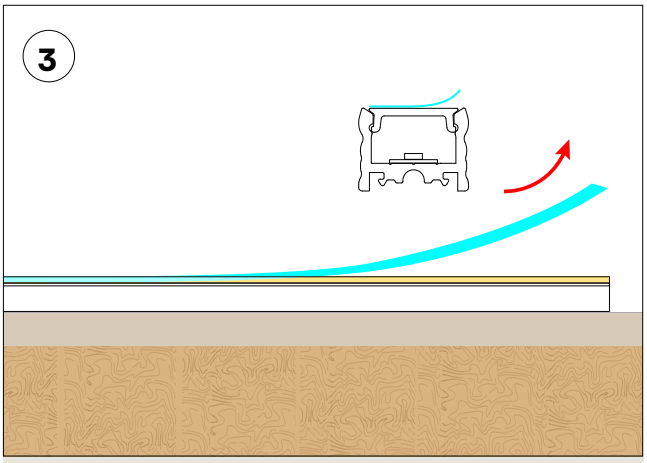


Remove protective film from the surface of the fixture’s lens.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **PLASTIC T-BAR CLIPS**

- 2 Clips provided per first 12", 1 clip provided per additional foot.

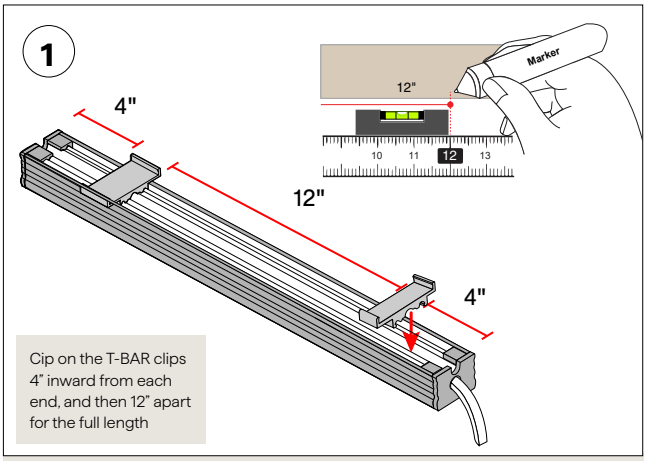


Determine the TALO fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 12".

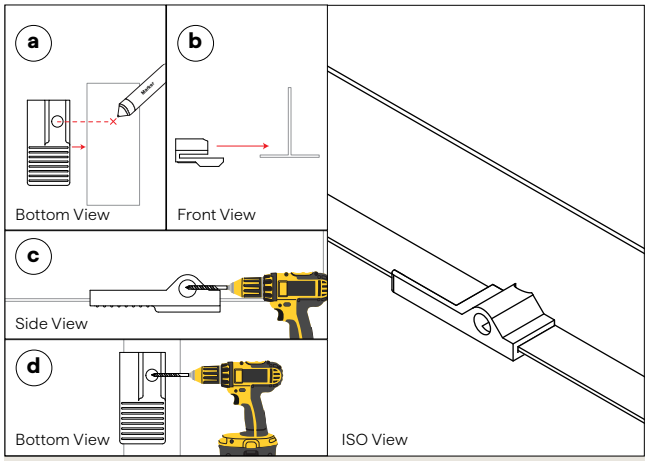


OPTIONAL - REQUIRED FOR S2/P2
Use provided jig to drill a hole in the t-bar ceiling grid, which will allow the wire to feed into the ceiling.

- **a.** Mark where wire will go through the T-Bar.
- **b.** Slide T-Bar Drill jig over T-Bar.
- **c.** Using a 3-16" Drill bit drill through the side hole.
- **d.** Then using a 3-16" Drill bit drill through the bottom hole.

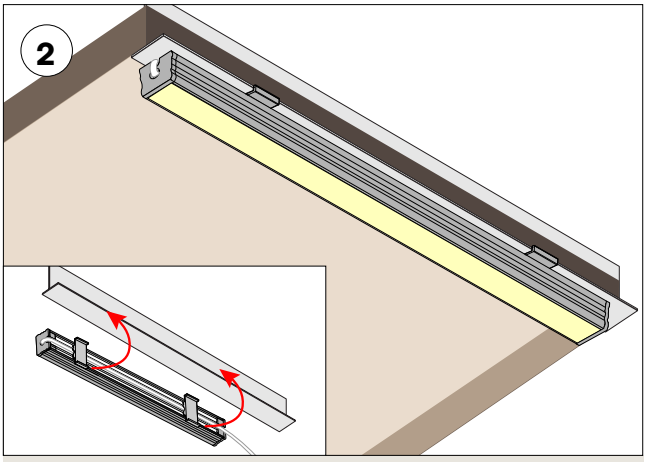

Snap fixture onto T-BAR.

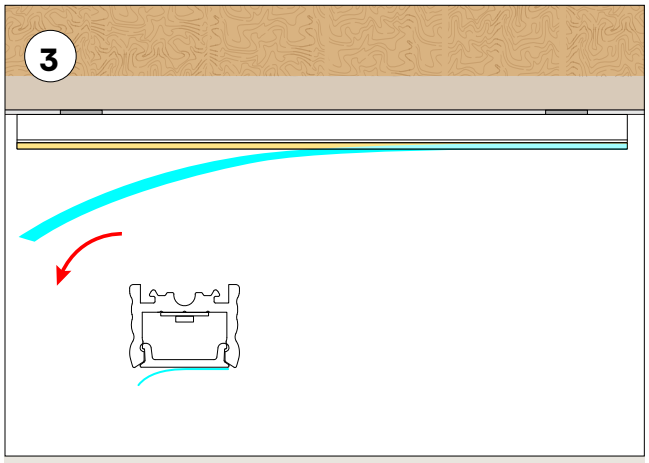

Remove protective film from the surface of the fixture's lens.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS TALO-ENCAPSULATED-DW-HE(03)

Linear Fixtures Color Data

TO3DW-2.5HE-24-ENC-STD-CL

2414 K

CRI: 93.2

CRI R9: 66.6

TM30 Rf: 89.5

TM30 Rg: 104.2

CQS: 86.2


X: 0.480

Y: 0.407


U: 0.278

V: 0.353

Δuv: -0.0025







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.6	96.4	95.2	93.6	93.8	95.8	92.1	84.4	66.6	89.5	94.2	85.8	95.3	95.9	91.2
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
83.9	93.3	84.4	86.1	88.1	83.6	79.7	84.6	94.5	88.5	88.0	87.9	88.6	86.9	85.4
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
92.0	91.0	82.9	88.1	90.0	87.7	86.7	90.0	93.5	92.9	89.8	87.7	90.2	85.4	90.7	87.5

TM30			
Hue Bin	R_f	Chroma	Hue
1	92	-4%	-1%
2	91	-3%	4%
3	83	1%	9%
4	88	4%	7%
5	90	7%	5%
6	88	9%	-1%
7	87	5%	-7%
8	90	1%	-7%
9	93	-2%	-3%
10	93	-3%	2%
11	90	0%	7%
12	88	3%	4%
13	90	7%	-5%
14	85	6%	-8%
15	91	2%	-6%
16	87	-1%	-9%

TO3DW-2.5HE-27-ENC-STD-CL

2831 K

CRI: 96.4

CRI R9: 94.4

TM30 Rf: 93.1

TM30 Rg: 104.2

CQS: 92.3


X: 0.447

Y: 0.403


U: 0.258

V: 0.348

Δuv: -0.0015







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.4	97.1	91.9	95.5	98.0	95.3	96.4	97.6	94.4	91.2	94.6	83.5	98.8	94.4	99.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.2	97.2	87.3	90.7	93.0	88.8	87.4	93.4	95.2	92.6	93.9	95.5	96.8	96.5	95.4
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.4	97.5	91.7	92.4	93.2	90.9	92.5	93.3	96.1	94.2	89.6	89.7	94.2	92.1	93.8	89.8

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	-1%
2	97	-1%	1%
3	92	1%	4%
4	92	1%	4%
5	93	4%	4%
6	91	6%	0%
7	92	3%	-3%
8	93	2%	-4%
9	96	-1%	-2%
10	94	-2%	3%
11	90	0%	7%
12	90	4%	5%
13	94	4%	1%
14	92	6%	-2%
15	94	3%	-2%
16	90	3%	-8%

TO3DW-2.5HE-40-ENC-STD-CL

4029 K

CRI: 97.8

CRI R9: 98.1

TM30 Rf: 92.5

TM30 Rg: 100.0

CQS: 95.0


X: 0.379


Y: 0.373


U: 0.225

V: 0.333

Δuv: -0.0011







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.5	99.5	96.1	98.8	97.4	95.8	98.4	98.1	98.1	96.8	97.8	73.9	99.3	97.2	96.8
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.8	98.9	89.3	88.8	93.3	96.5	96.9	98.4	97.8	97.6	97.7	99.0	99.5	98.2	96.8
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
94.8	97.1	96.1	93.3	91.9	96.3	94.7	93.4	89.9	88.2	86.6	92.0	94.1	94.6	89.9	90.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	95	-1%	1%
2	97	0%	0%
3	96	0%	0%
4	93	-3%	-1%
5	92	-5%	0%
6	96	-1%	1%
7	95	-3%	2%
8	93	-2%	4%
9	90	-1%	8%
10	88	0%	8%
11	87	4%	8%
12	92	4%	2%
13	94	3%	-2%
14	95	2%	0%
15	90	2%	-4%
16	90	2%	-5%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS TALO-ENCAPSULATED-DW-HE(03)

Linear Fixtures Color Data

TO3DW-2.5HE-24-ENC-STD-TL

2353 K

CRI: 93.1

CRI R9: 66.9

TM30 Rf: 89.8

TM30 Rg: 103.8

CQS: 86.0


X: 0.488

Y: 0.411


U: 0.281

V: 0.355

Δuv: -0.0012







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.4	95.9	94.5	93.9	93.3	95.3	92.9	84.9	66.9	88.2	94.6	84.5	94.8	95.4	90.8
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
83.4	92.3	84.5	86.1	87.0	82.6	80.0	85.0	93.8	88.4	88.5	88.5	89.3	86.3	84.7
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
91.8	91.6	84.0	88.7	90.4	88.3	87.1	90.3	93.0	93.0	89.8	89.0	90.3	86.0	90.8	88.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	92	-4%	-1%
2	92	-4%	3%
3	84	0%	8%
4	89	4%	7%
5	90	7%	5%
6	88	9%	0%
7	87	5%	-7%
8	90	1%	-7%
9	93	-2%	-3%
10	93	-4%	2%
11	90	0%	6%
12	89	3%	4%
13	90	6%	-6%
14	86	5%	-8%
15	91	2%	-6%
16	88	-2%	-9%

TO3DW-2.5HE-27-ENC-STD-TL

2719 K

CRI: 97.1

CRI R9: 95.0

TM30 Rf: 94.2

TM30 Rg: 103.7

CQS: 92.9


X: 0.457

Y: 0.408


U: 0.262

V: 0.351

Δuv: -0.0007







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.8	97.6	92.7	96.1	98.6	96.4	97.2	98.3	95.0	92.5	94.8	85.3	99.2	94.8	99.1
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.6	97.1	88.9	92.2	93.4	89.4	88.5	93.9	95.3	93.5	95.0	96.3	97.3	96.5	95.5
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.8	97.9	93.2	93.8	94.1	92.0	93.1	94.0	96.3	95.7	91.4	91.3	95.1	93.1	94.6	91.1

TM30			
Hue Bin	R_f	Chroma	Hue
1	97	-1%	-1%
2	98	-1%	1%
3	93	0%	3%
4	94	1%	3%
5	94	3%	4%
6	92	5%	1%
7	93	4%	-3%
8	94	2%	-4%
9	96	-1%	-2%
10	96	-2%	2%
11	91	0%	6%
12	91	4%	3%
13	95	4%	0%
14	93	5%	-2%
15	95	2%	-2%
16	91	3%	-7%

TO3DW-2.5HE-30-ENC-STD-TL

3051 K

CRI: 95.4

CRI R9: 88.8

TM30 Rf: 92.9

TM30 Rg: 102.8

CQS: 92.3


X: 0.433

Y: 0.401


U: 0.249

V: 0.346

Δuv: -0.0006







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.4	95.9	92.0	96.0	95.9	93.4	96.7	96.1	88.8	88.5	95.3	78.3	96.9	94.6	96.9
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
95.2	97.5	86.2	88.6	92.6	90.8	88.9	94.0	95.2	92.6	93.5	95.1	96.5	95.3	95.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.9	96.5	91.4	93.3	92.9	92.8	95.0	95.5	96.0	90.8	87.4	88.8	94.5	91.8	92.9	89.2

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	-1%
2	96	-1%	1%
3	91	0%	4%
4	93	1%	4%
5	93	1%	3%
6	93	5%	0%
7	95	2%	-2%
8	95	0%	-3%
9	96	-2%	0%
10	91	-2%	5%
11	87	0%	9%
12	89	4%	5%
13	94	4%	1%
14	92	7%	-2%
15	93	3%	-3%
16	89	3%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-03-04-24

ESSENTIALS TALO-ENCAPSULATED-DW-HE(03)

Linear Fixtures Color Data

TO3DW-2.5HE-40-ENC-STD-TL

4120 K

CRI: 97.4

CRI R9: 97.0

TM30 Rf: 92.3

TM30 Rg: 99.1

CQS: 94.8


X: 0.376


Y: 0.374


U: 0.223

V: 0.333

Δuv: 0.0001







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.6	99.3	96.5	97.3	96.6	95.9	97.6	97.2	97.0	96.2	97.9	73.2	99.4	97.5	96.5
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.7	98.4	90.1	88.7	92.1	94.7	97.6	98.3	98.2	98.2	98.1	99.2	99.8	98.4	96.4
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
94.5	96.9	96.1	93.0	91.6	96.1	93.7	92.6	89.2	87.3	87.0	93.6	93.9	95.1	90.1	90.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	94	-1%	1%
2	97	0%	0%
3	96	-1%	0%
4	93	-3%	-1%
5	92	-5%	0%
6	96	-2%	1%
7	94	-3%	2%
8	93	-2%	4%
9	89	-1%	8%
10	87	0%	8%
11	87	4%	8%
12	94	3%	2%
13	94	3%	-2%
14	95	0%	0%
15	90	2%	-4%
16	90	1%	-5%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MATERIAL RECYCLING

ENCAPSULATED LINEAR FIXTURES

You may be done with your products, but chances are they still have more to give. Follow these instructions to break down and sort recyclable components. Check with local recycling collection to ensure they accept the materials listed below.

Additionally, Q-Tran offers a Takeback Program. Contact factory for information.

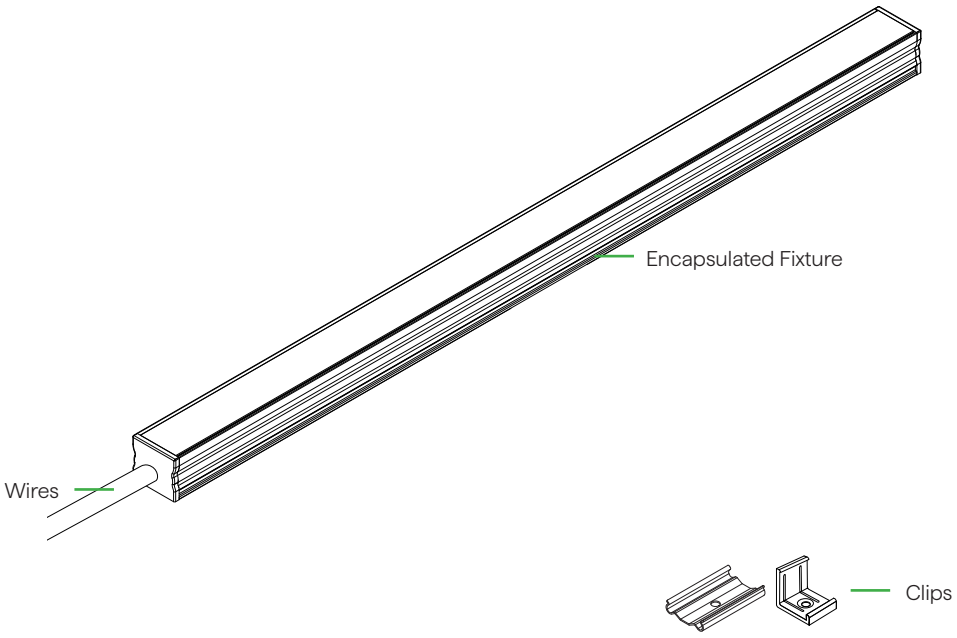

7	E	40
Plastic Clips	Encapsulated Fixture Wires	Stainless Steel Clips

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting