ESSENTIALS LALO-FLAT-OCCUPANCY (01) SW


24VDC Linear Fixtures - Surface & Recessed


410.2 & 410.16 Closet Rated up to 4.0W/ft

1-BIN 1-STEP SW/SW-HE ONLY

5 YEAR WARRANTY

SW, SW-HE ONLY

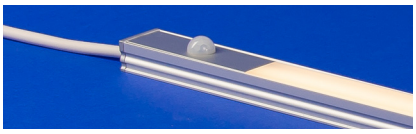



- Shallow, low-profile fixture for surface or recessed installations
- Choose from diffused, polar, or frosted lens options for varying diode visibility and beam angles
- Flanged design merges light source with surface
- Built-in occupancy sensor
- Detects movement up to 10' away and switches off after no movement is detected for 30 seconds
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
			DRY	STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **LL1SW-OC-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT

LL1SW-OC
LL1SW-OC-USA

Select USA option for BAA and BABA projects.

See following pages for compatible power supplies.

2 WATTS/FT

1.5	1.5W/ft
3.0	3.0W/ft
4.0	4.0W/ft
5.0	5.0W/ft
1.5HE	1.5W/ft HE
3.0HE	3.0W/ft HE
6.0HE	6.0W/ft HE
3.0HE+	3.0W/ft HE+
6.0HE+	6.0W/ft HE+

3 CCT

20	2000K
22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

27	2700K
30	3000K
35	3500K
40	4000K

4 RATED

DRY	IP20

5 EFFICIENCY

STD	Standard

6 LENS

DF	Diffused
PR	Polar
FR	Frosted

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

S1	End Feed
S2	Bottom Feed

PASS THROUGH (Input/output)

P1	End Feed
P2	Bottom Feed

For continuous mounting, consider bottom feed.

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)
BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH	White
BK	Black
N/A	For Barrel

wet barrel only available in black

11 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated
N/A	For Barrel

CL2P only available with bare wire leads (BW)

12 MOUNTING

SST	Stainless Steel
M4	Low Profile Magnet
MG	Magnet

13 FINISH

ST	Satin
BK	Black
CU	Custom

Custom finishes require a longer lead time, consult factory

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O	Optimal Illumination
E	Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-02-02-26

Motion: Auto on | No Motion: 30 second time out | Occupancy Sensor not programmable | Do not install with dimmer | 5 year warranty | Warranty only valid with QTL non-dimming power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


ESSENTIALS LALO-FLAT-OCCUPANCY (01) SW

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens, occupancy sensor and stainless steel mounting clip



Profile with flat lens, occupancy sensor, and magnet mounting clip




Profile with flat lens, occupancy sensor, and low profile magnet

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with LL1SW-**-30-DRY-STD


	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		6.0HE+ W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	143	98	175	98	249	98	321	98	463	92	309	98	376	98	608	98	856	92
FR	142	98	174	98	248	98	320	98	461	92	308	98	375	98	606	98	853	92
PR	134	98	157	98	234	98	288	98	416	92	291	98	354	98	546	98	768	92
DF	120	98	141	98	210	98	259	98	373	92	261	98	318	98	490	98	690	92

6 DIODE VISIBILITY

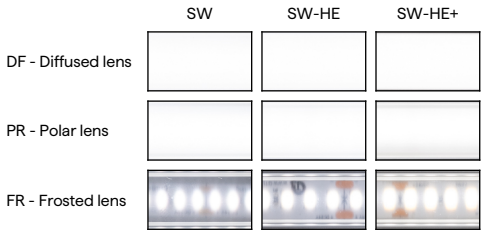

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



78°

© 2026 QTL. All rights reserved

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SW


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		3.0 HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		6.0 HE+ W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	130°F	-4	135	-4°F	120°F	-4	125	-13	125	-4°F	115°F	-4°F	110°F	-4	110	-13	110


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed | Bottom Feed

PASS THROUGH (Input/Output)




End Feed | Bottom Feed

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"
22 AWG



Barrel 6" - DRY/DMP | 22 AWG




Barrel 6"- WET | 22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-02-02-26

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SW

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

MMA-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01




Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

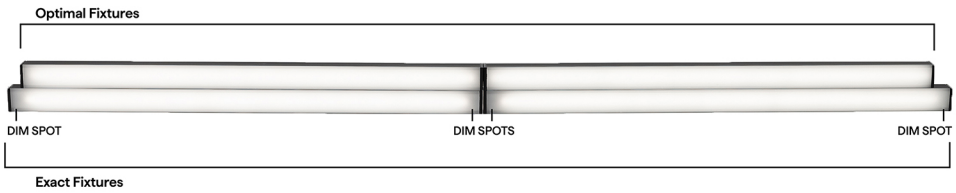


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SW



24VDC Linear Fixtures - Surface & Recessed

SW DRY LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH



Requested Nominal Length	S1 & S2 	P1 & P2 
12"	11.41"	11.66"
13"	12.41"	12.66"
14"	13.41"	13.66"
15"	14.41"	14.66"
16"	15.41"	15.66"
17"	16.41"	16.66"
18"	17.41"	17.66"
19"	18.41"	18.66"
20"	19.41"	19.66"
21"	20.41"	20.66"
22"	21.41"	21.66"
23"	22.41"	22.66"
24"	23.41"	23.66"
36"	35.41"	35.66"
48"	47.41"	47.66"
60"	59.41"	59.66"
72"	71.41"	71.66"
84"	83.41"	83.66"
96"	95.41"	95.66"

SW-HE DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 
12"	10.41"	10.66"
13"	12.41"	12.66"
14"	12.41"	12.66"
15"	14.41"	14.66"
16"	14.41"	14.66"
17"	16.41"	16.66"
18"	16.41"	16.66"
19"	18.41"	18.66"
20"	18.41"	18.66"
21"	20.41"	20.66"
22"	20.41"	20.66"
23"	22.41"	22.66"
24"	22.41"	22.66"
36"	34.41"	34.66"
48"	46.41"	46.66"
60"	58.41"	58.66"
72"	70.41"	70.66"
84"	82.41"	82.66"
96"	94.41"	94.66"

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SW

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QTM-eLED-ND QZ-ND	QTM-eLED-ND QZ-ND


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT




Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

QUOVA-STANDARD



QUOVA Knife Edge

NJ-MEDIUM




J Mounting Bracket

SD-L-MEDIUM




L Mounting Bracket

MMA-01




Magnet Mount Accessory of MG-01

MMA-04




Magnet Mount Accessory of MG-04

OCCUPANCY SENSOR (OC)

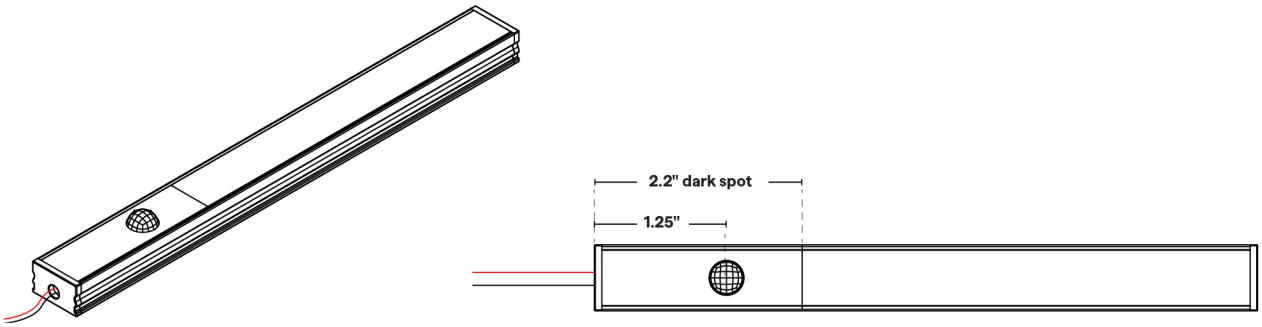


- **Motion based on/off functionality**
- **30 sec. on/off time without motion**
- **24VDC**
- **3A max / 72W**
- **Use with non-dimming driver**
- **Detection Range: up to 10'**

COVERAGE AREA



Side View



Top View

© 2026 QTL. All rights reserved


ESSENTIALS LALO-FLAT-OCCUPANCY

Linear Fixture Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Compatible for use with QTL power supplies
- Surface mount or recessed in millwork
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Do not install with dimmer
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

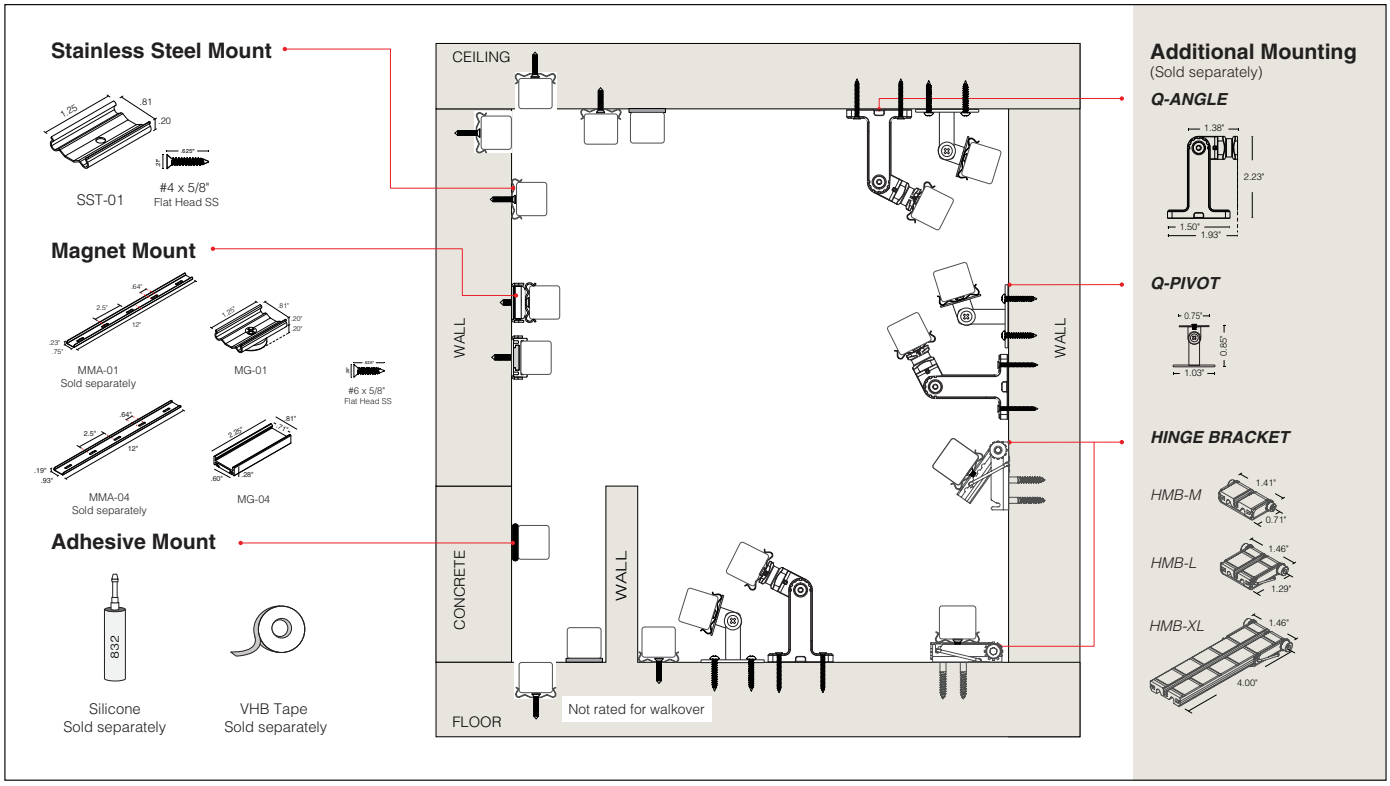

Surface Mounting Method

- VHB Mount (page 5-6)
- Silicone Mount (page 7)
- Screw Mount (page 8)
- Magnet Mount (page 9)
- Low Profile Magnet Mount (page 10)


Recessed Mounting Method

- Magnet Mount : Millwork (page 11)


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY


Linear Fixture Installation Instructions



Profile with flat lens






Profile with flat lens stainless steel mounting clip



Profile with flat lens magnet mounting clip


COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size

STAINLESS STEEL CLIP	MAGNET CLIP	LOW PROFILE MAGNET CLIP
 SST-01	 MG-01	 MG-04
Included: Flat Head Screw #4x5/8"	Included: Flat Head Screw #6x5/8"	Included: Flat Head Screw #6x5/8"
• 2 clips provided for 4' or less; 4 clips provided for greater than 4'	• One magnet clip per foot	• One magnet clip per foot

ACCESSORIES SOLD SEPARATELY

MAGNET MOUNT ACCESSORY; sold individually




Included: Flat Head Screw #6x5/8"

MMA-01

- MMA-01 comes in 12" pieces; use at least one clip per MMA-01 accessory
- MMA-01 can be cut into smaller pieces, if desired


HINGE BRACKET; sold individually



HMB-M
HMB-L
HMB-XL

Included:
- 3/4" long mount screw
- 1/4" #4 clip mount screw

Q-ANGLE; sold in pairs



Q-ANGLE

Included:
- 3/4" long mount screw
- 1/4" #4 clip mount screw


Q-PIVOT; sold in pairs



Q-PIVOT

Included:
- SS #4-40x3/16 Flat head screw
- 2 #4x3/4 Pan head screws

LOW PROFILE MAGNET MOUNT ACCESSORY; sold Individually




Included: 2 #6x5/8" Flat Head screws

MMA-04


- MMA-04 comes in 12" pieces; use at least one clip per MMA-04 accessory
- MMA-04 can be cut into smaller pieces, if desired

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


ADHESIVE SOLD SEPARATELY	
SILICONE	VHB TAPE; sold in 15' increments
 DOWSIL 832	 TAPE-VHB-IP20

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed



Continuous Bottom Feed



Continuous End to End Feed

Review wire method to ensure clean installation prior to mounting finished Fixture.


NOTE: Additional wire methods include:
S1 & S2: Connector/Wire Input only
P1 & P2: Connector/Wire Input and Output

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD

SURFACE PREPARATION


1

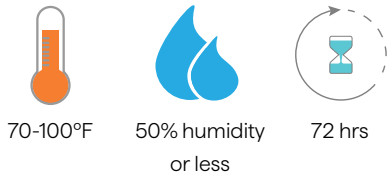

Temperature and environmental concerns:

- Ideal application environment is 70-100°F in 50% humidity or less.
- Minimum application temperature: 50°F
- This temperature and humidity should be maintained for 72 hours after application for maximum bond strength.


2

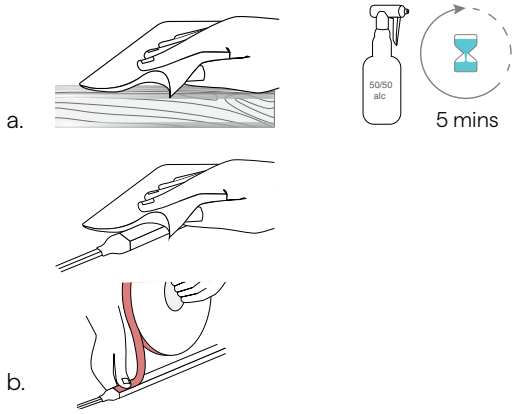

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the Fixture and the surface area where Fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

3

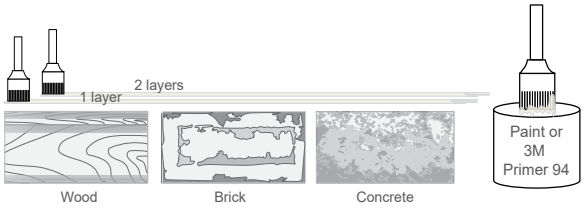


For porous materials (Wood, Brick, Concrete etc.) apply two layers of paint or primer to the surface. This will help create a better bonding surface for these materials. These can be purchased from a local hardware store.

MATERIALS	SUGGESTED EPOXIES
Concrete, Stone, Cinderblock, Metal, and Brick	Loctite Metal and Concrete Two-Part Epoxy
ABS, Fiberglass, Plastic, and PVC	Loctite Plastic Two-Part Epoxy
Tile, Wood, Ceramic, Glass, or Metal	Loctite Clear Two-Part Epoxy
All Purpose	Strong Stik


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **VHB ADHESIVE MOUNT**

BEFORE installation, the surface must be thoroughly cleaned and dried for maximum bond strength.

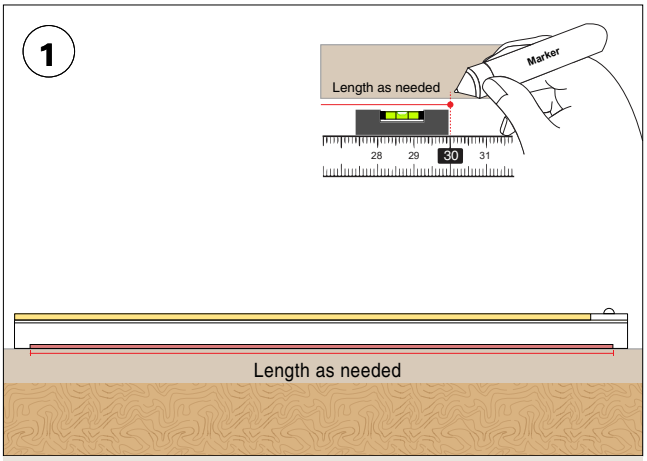


Determine the LALO-FLAT-OC fixture(s) location and positioning on desired surface before adhering Fixture to surface. Make any necessary reference markings to indicate fixture placement.

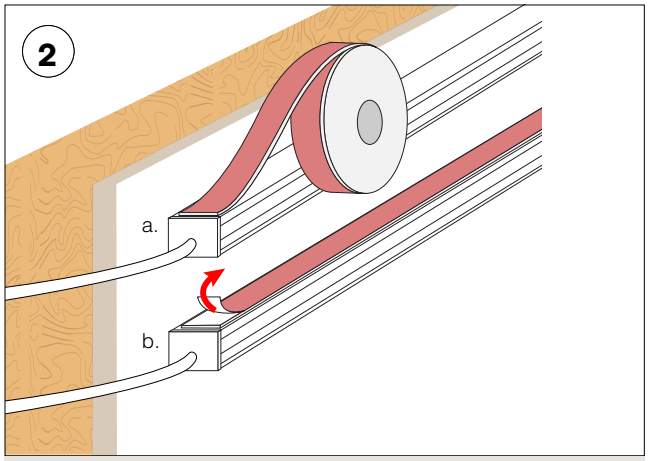

a. To adhere the VHB adhesive, peel the white film back while evenly applying the tape to the mounting side of the fixture. The red side should be visible.

b. Remove the red film and position fixture in place according to your previous reference marking(s).

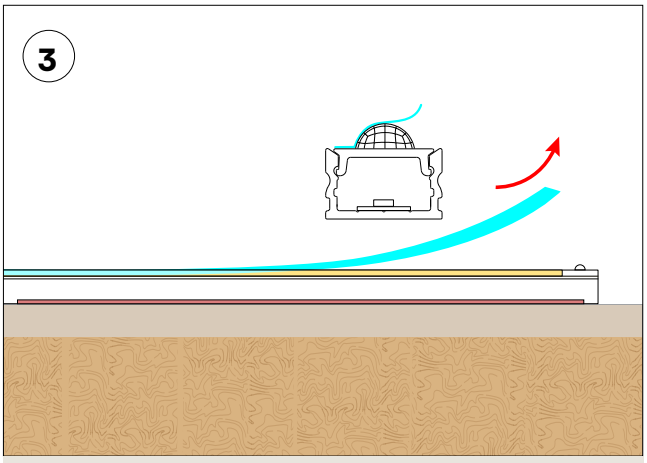


Remove protective film from the surface of the fixture's lens.

NOTES: *EPOXY ALTERNATIVE: For improved bonding strength, apply a small amount of epoxy at each end. Refer to table on* page 5 *for suggested epoxies. These can be purchased at a local hardware store. Please follow all manufacturer instructions for suggested epoxy.*


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SILICONE**

- 2 clips provided for 4’ or less; 4 clips provided for greater than 4’

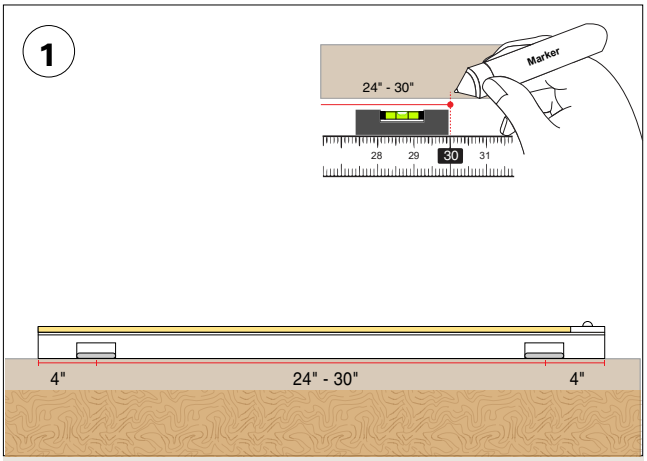

Determine the LALO-FLAT-OC fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24” - 30”.

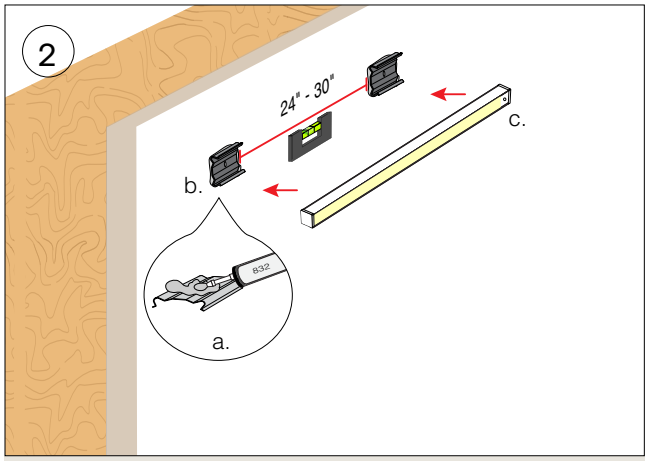


a. Firmly press the silicone-coated clips on the marked reference points.

b. Wait for silicone adhesive to cure completely before snapping fixture into place.

c. Snap fixture onto clips.

NOTE: Cure time is dependent on the type of silicone adhesive used. Refer to silicone product manufacturer for accurate drying time.

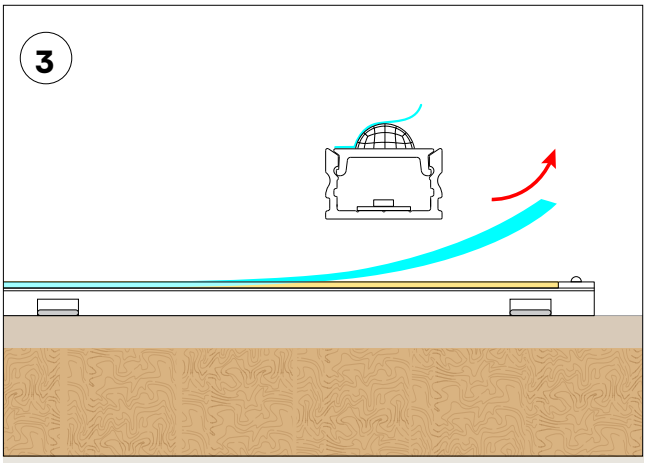


Remove protective film from the surface of the fixture’s lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SCREW MOUNT**

- 2 clips provided for 4’ or less; 4 clips provided for greater than 4’

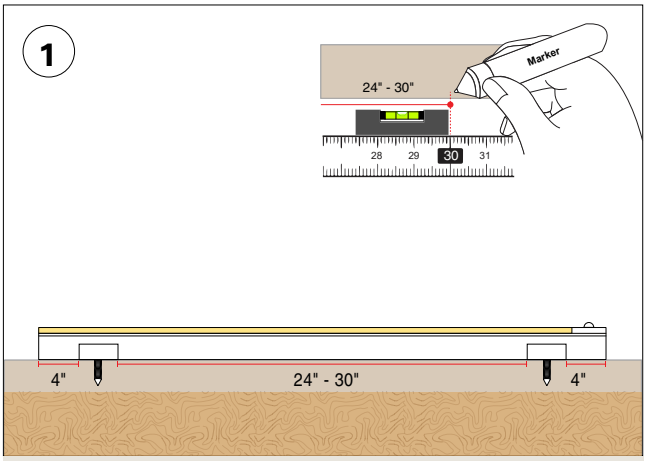

Determine the LALO-FLAT-OC fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24” - 30”.

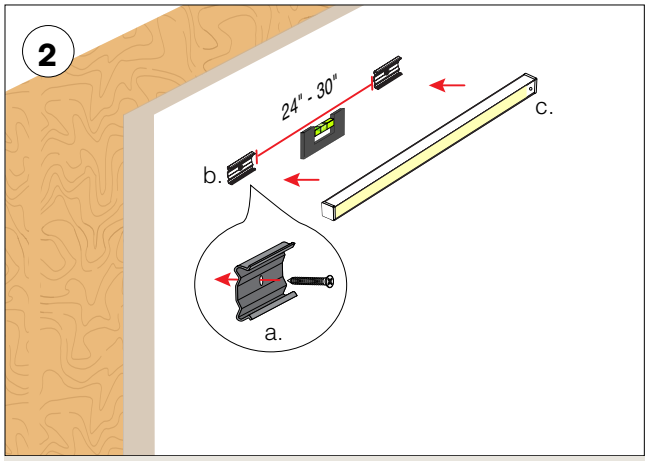


a. Secure clips using the #4 flat head hardware provided.

b. Ensure the screw head is flush with the clip’s base.

c. Snap fixture onto clips.

NOTE: Flat head screw type is dependent on surface/application material. Alternative flat head screws may be required. Refer to the surface material manufacturer for suggested screw type.

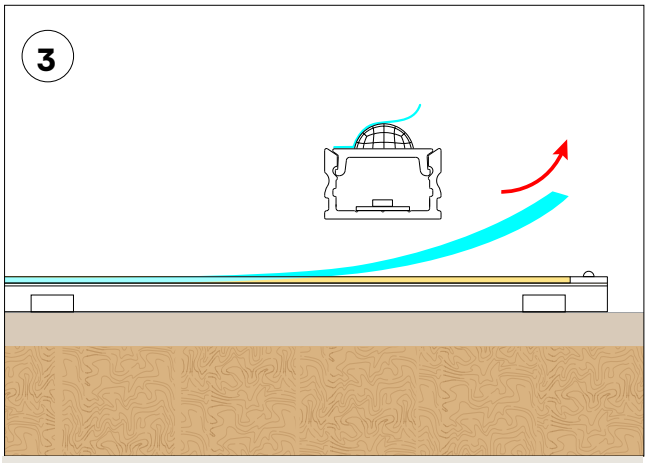


Remove protective film from the surface of the fixture’s lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **MAGNET MOUNT**

- One magnet clip per foot
- MMA-01 comes in 12" pieces; use at least one clip per MMA-01 accessory
- MMA-01 can be cut into smaller pieces, if desired

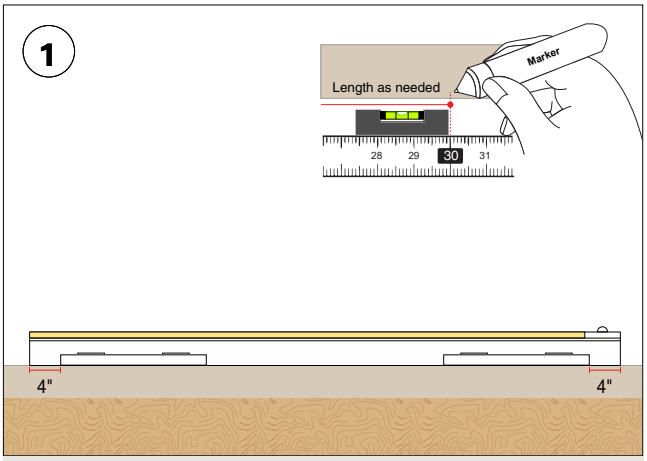

Determine the LALO-FLAT-OC fixture(s) location and positioning on desired surface. Make any necessary reference markings to indicate where the magnet mount accessory bracket is to be secured in place.

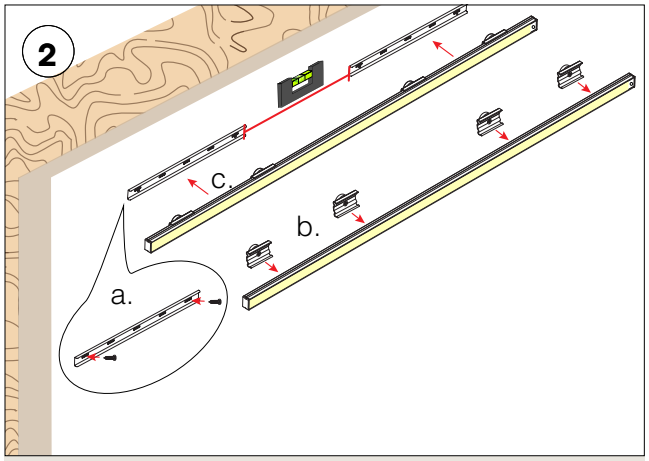


a. Mount the two #6 flat head screws into the 12" magnet mount accessory bracket through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

b. Snap the magnet clips onto the backside of the fixture. They should be offset to the accessory bracket screws to maximize magnetic connection.

c. Place the assembled fixture into the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

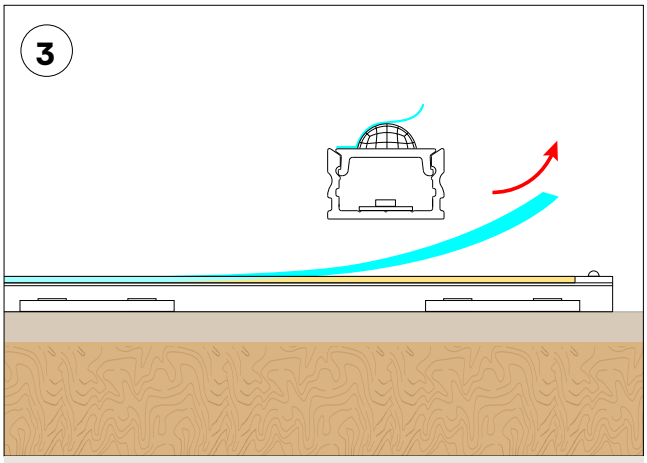


Remove protective film from the surface of the fixture's lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **LOW PROFILE MAGNET MOUNT**

- One magnet clip per foot
- MMA-04 comes in 12" pieces; use at least one clip per MMA-04 accessory
- MMA-04 can be cut into smaller pieces, if desired

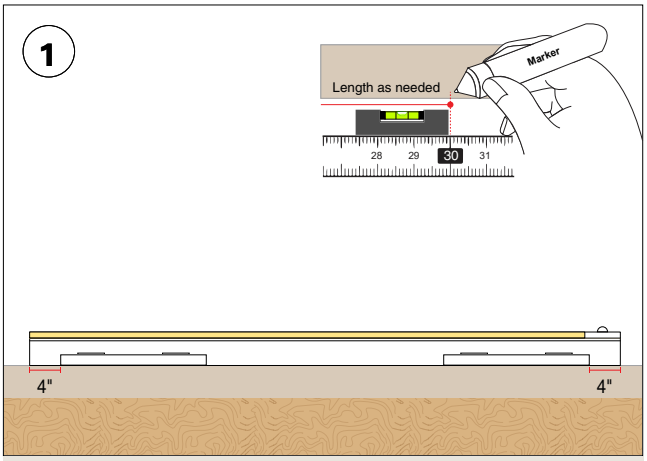

Determine the LALO-FLAT-OC fixture(s) location and positioning on desired surface. Make any necessary reference markings to indicate where the magnet mount accessory bracket is to be secured in place.

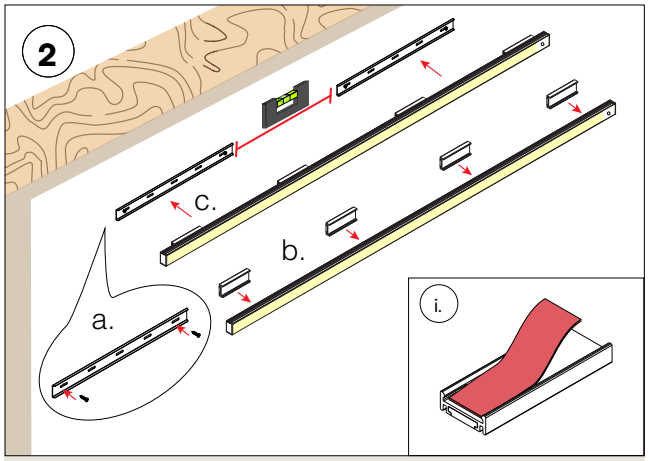


a. Mount the two #6 flat head screws into the magnet mount accessory bracket through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

b. Snap the magnet clips onto the backside of the fixture. They should be offset to the accessory bracket screws to maximize magnetic connection. If the clip does not fit securely onto the extrusion, apply the provided foam onto the inner face of the magnet clip.

c. Place the assembled fixture into the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

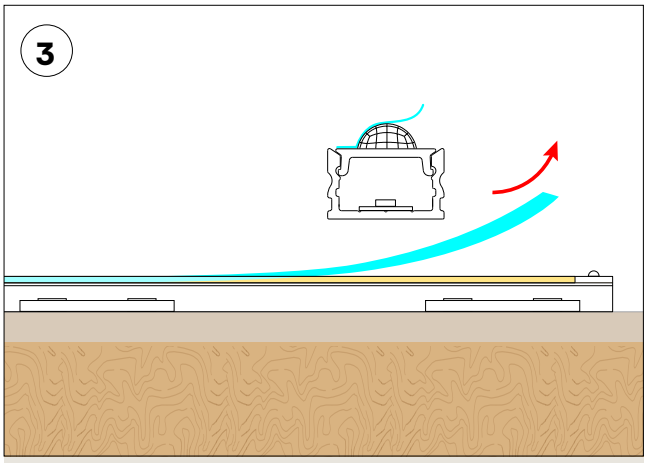


Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


RECESSED MOUNTING METHOD: **MILLWORK**

- One magnet clip per foot
- MMA-01 comes in 12" pieces; use at least one clip per MMA-01 accessory
- MMA-01 can be cut into smaller pieces, if desired

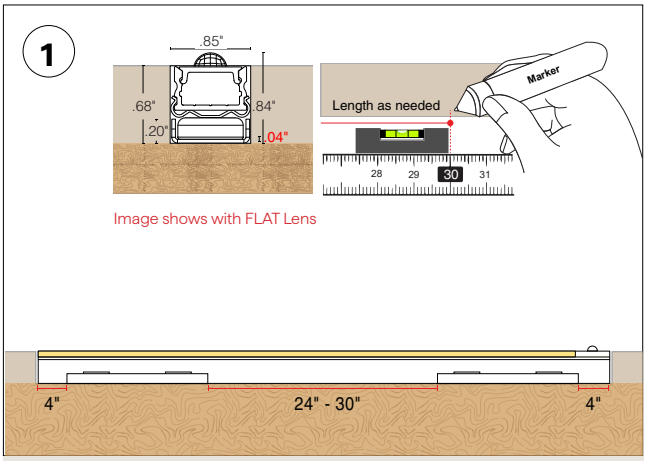

Determine the LALO fixture(s) location and positioning on desired surface. Make any necessary reference markings to indicate where the magnet mount accessory bracket is to be secured in place.

NOTE: Depth of the channel in the millwork is dependent on overall height with the magnet clip and Magnet Mount Accessory.

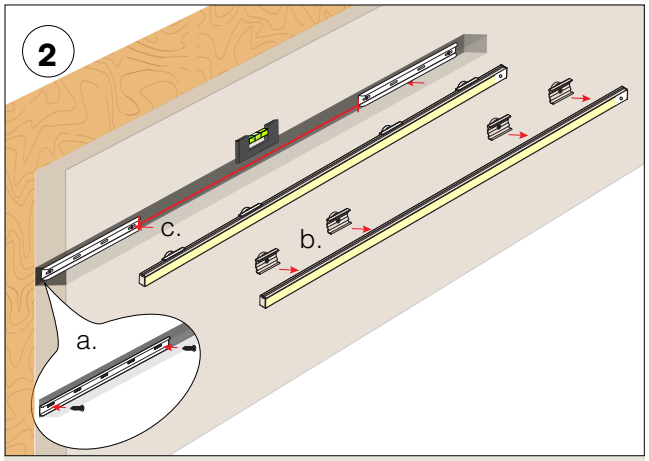


a. Mount the two #6 flat head screws into the 12" magnet mount accessory bracket through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

b. Snap the magnet clips onto the backside of the fixture. They should be offset to the accessory bracket screws to maximize magnetic connection.

c. Place the assembled fixture into the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

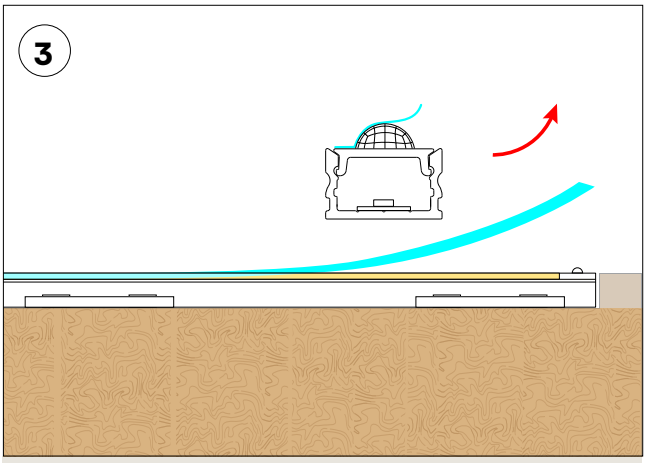

Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY-SW(01)

Linear Fixtures Color Data

LL1SW-OC-5.0-30-DRY-STD-FR

3120 K

CRI: 98.2

CRI R9: 96.5

TM30 Rf: 94.3

TM30 Rg: 100.8

CQS: 95.4


X: 0.428


Y: 0.398


U: 0.247

V: 0.345

Δuv: -0.0010







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.2	99.4	96.8	98.9	98.6	97.1	98.5	98.4	96.5	99.0	96.5	83.0	98.3	97.2	98.3
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.7	97.0	91.8	92.4	95.4	98.3	95.6	97.3	97.3	97.3	97.9	98.4	98.4	96.5	95.7
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.1	97.8	96.8	95.1	93.6	97.3	93.4	97.9	93.8	90.8	90.9	92.1	95.3	93.0	92.4	90.1

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	0%	4%
10	91	1%	6%
11	91	3%	6%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%

LL1SW-OC-5.0-30-DRY-STD-PR

3134 K

CRI: 98.2

CRI R9: 97.6

TM30 Rf: 94.4

TM30 Rg: 101.0

CQS: 95.5


X: 0.427


Y: 0.398


U: 0.247

V: 0.345

Δuv: -0.0011







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.0	99.4	96.5	98.6	98.5	97.2	98.8	98.8	97.6	98.9	96.4	83.2	98.2	97.0	98.1
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.0	97.1	91.8	92.4	95.6	98.3	95.5	97.3	97.2	97.2	97.9	98.3	98.3	96.5	95.9
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.3	97.9	96.8	95.3	93.7	97.2	93.5	98.1	94.1	91.0	91.0	92.3	95.6	93.2	92.6	90.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	0%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	94	-2%	3%
8	98	0%	1%
9	94	0%	4%
10	91	1%	5%
11	91	3%	6%
12	92	5%	0%
13	96	1%	-3%
14	93	4%	-3%
15	93	0%	-2%
16	90	2%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY-SW(01)

Linear Fixtures Color Data

LL1SW-OC-5.0-30-DRY-STD-DF

3110 K

CRI: 98.2

CRI R9: 96.5

TM30 Rf: 94.4

TM30 Rg: 100.9

CQS: 95.4


X: 0.428


Y: 0.398


U: 0.247

V: 0.345

Δuv: -0.0011







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.2	99.3	96.8	98.8	98.6	97.2	98.5	98.4	96.5	98.9	96.6	83.5	98.3	97.1	98.4
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.0	97.0	91.8	92.4	95.5	98.2	95.4	97.1	97.3	97.1	97.7	98.4	98.5	96.4	95.8
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.3	97.9	96.8	95.3	93.8	97.3	93.6	98.1	94.1	91.1	91.1	92.3	95.4	93.1	92.6	90.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	94	-2%	3%
8	98	0%	1%
9	94	0%	4%
10	91	1%	5%
11	91	3%	6%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	93	0%	-2%
16	90	2%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY-SW-HE(01)

Linear Fixtures Color Data

LL1SW-OC-6.0HE-30-DRY-STD-FR

3122 K

CRI: 98.0

CRI R9: 95.8

TM30 Rf: 93.3

TM30 Rg: 99.8

CQS: 95.0


X: 0.428


Y: 0.400


U: 0.247

V: 0.346

Δuv: -0.0005







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.3	99.2	97.4	99.0	98.1	97.0	97.6	97.5	95.8	99.4	97.7	81.2	98.3	97.5	97.9
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
91.8	96.5	92.3	91.8	93.8	96.3	96.8	97.5	97.5	97.9	98.3	98.1	98.2	96.3	94.8
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.0	97.3	96.7	93.3	92.6	97.0	91.3	96.4	91.7	88.7	90.2	91.8	94.7	92.6	91.4	90.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	95	-1%	1%
2	97	0%	0%
3	97	0%	0%
4	93	-3%	-2%
5	93	-6%	0%
6	97	-1%	1%
7	91	-4%	4%
8	96	0%	2%
9	92	0%	6%
10	89	1%	7%
11	90	4%	6%
12	92	6%	0%
13	95	1%	-4%
14	93	3%	-4%
15	91	-1%	-1%
16	90	2%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


Specification subject to change. Rev-02-02-26

MATERIAL RECYCLING

LINEAR FIXTURES/EXTRUSIONS

You may be done with your products, but chances are they still have more to give. Follow these instructions to break down and sort recyclable components. Check with local recycling collection to ensure they accept the materials listed below.

Additionally, Q-Tran offers a Takeback Program. Contact factory for information.

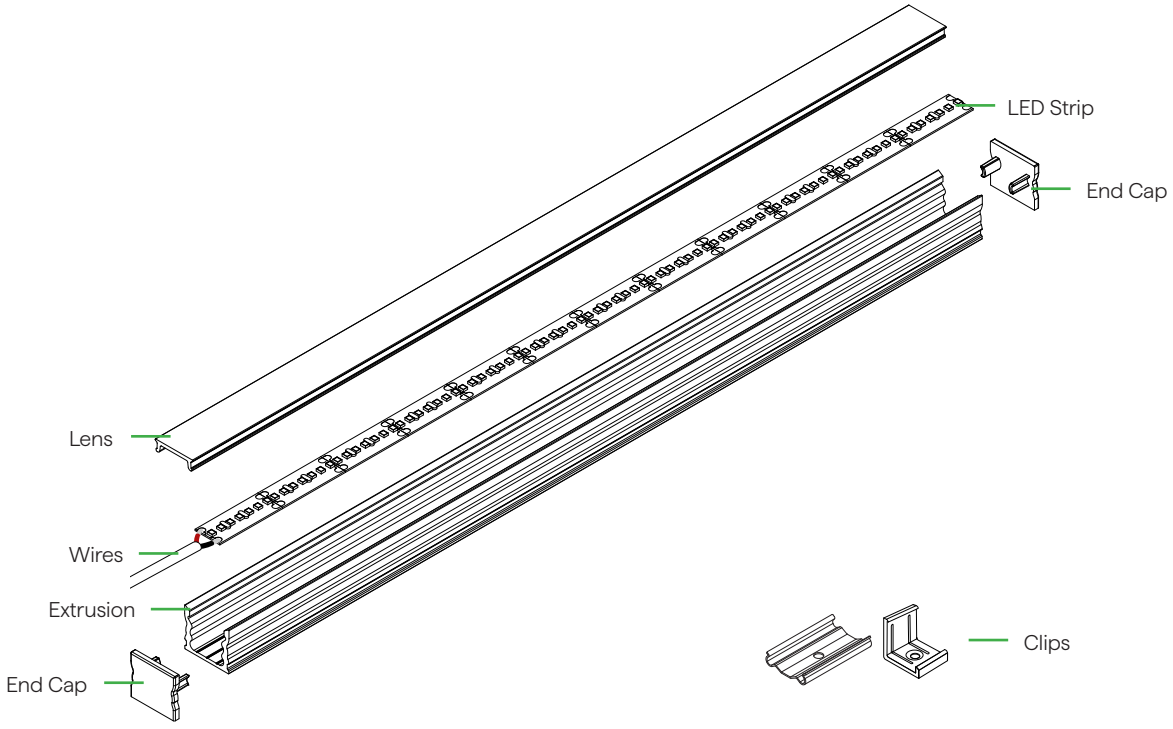

7	E	41	40
Lens Plastic End Caps Plastic Clips	LED Strip Wires	Extrusion Metal End Caps	Stainless Steel Clips

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting