
ESSENTIALS VEVE™-OPTICS (02) TUNABLE APPLICATIONS


24VDC Linear Fixtures - Corner & Surface

410.2 & 410.16 Closet Rated in 1.5HE

BUY AMERICAN ACT COMPLIANT

BUILD AMERICA, BUY AMERICA COMPLIANT

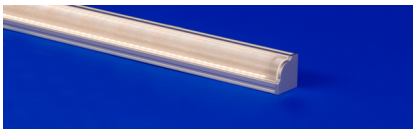



- Thin, low-profile surface mount linear fixture
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
				STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VV2DW-2.5HE-20/30-DRY-STD-12-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT

VV2DW
VV2DW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2 WATTS/FT

1.5HE	1.5W/ft HE
2.5HE	2.5W/ft HE
4.0HE	4.0W/ft HE

1.5HE	1.5W/ft HE
2.5HE	2.5W/ft HE

3 CCT

18/30	1800K/3000K
18/35	1800K/3500K
20/27	2000K/2700K
20/30	2000K/3000K
24/40	2400K/4000K
27/40	2700K/4000K
27/55	2700K/5500K

18/30	1800K/3000K
18/35	1800K/3500K
20/27	2000K/2700K
20/30	2000K/3000K
24/40	2400K/4000K
27/40	2700K/4000K
27/55	2700K/5500K

4 RATED

DRY	IP20

DMP	IP54

5 EFFICIENCY

STD	Standard

6 LENS

20	Optical 20°
45	Optical 45° DRY or DMP only

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

S1	End Feed

PASS THROUGH (Input/output)

P1	End Feed

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH	White
BK	Black

11 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

12 MOUNTING

SST	Stainless Steel
M4	Low Profile Magnet
MG	Magnet

13 FINISH

ST	Satin
BK	Black
BZ	Bronze
CU	Custom

Custom finishes require a longer lead time, consult factory

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O	Optimal Illumination
E	Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-05-07-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


ESSENTIALS VEVE™-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Corner & Surface


1 PRODUCT - DIMENSIONS




Profile with optical lens



Profile with optical lens, stainless steel mounting clip and mounting tray



Profile with optical lens magnet mounting clip




Profile with optical lens with low profile magnet

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VV2DW-**-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT		4.0HEW/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
20	148	98	234	98	363	98
45	162	98	255	98	396	98

6 DIODE VISIBILITY



Optical lens

PHOTOMETRIC PERFORMANCE


Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

20DEG



Optical 20°

45DEG



Optical 45°

TEMPERATURE RATINGS

		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	130°F	-4°F	140°F	-4°F	120°F	-4°F	140°F	-4°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	130°F	-4°F	140°F	-4°F	120°F	—	—	—	—


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS VEVE™-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Corner & Surface


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed



Connection by others


Non-Continuous Corner Feed

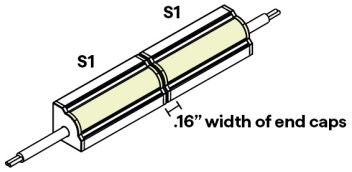


Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White

Black


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS VEVE™-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

MMA-04




Magnet Mount
Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



Satin

Black


Bronze

Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

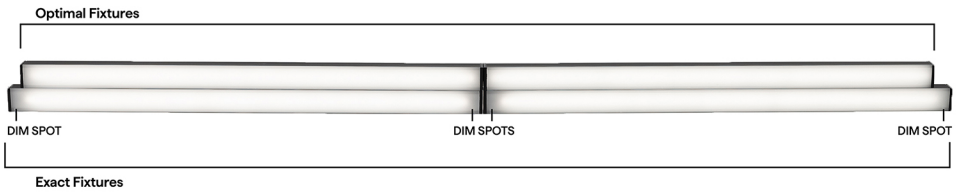


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS VEVE™-OPTICS (02) TUNABLE APPLICATIONS



24VDC Linear Fixtures - Corner & Surface

DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 	P1 
12"	10.51"	10.86"
13"	12.51"	12.86"
14"	12.51"	12.86"
15"	14.51"	14.86"
16"	14.51"	14.86"
17"	16.51"	16.86"
18"	16.51"	16.86"
19"	18.51"	18.86"
20"	18.51"	18.86"
21"	20.51"	20.86"
22"	20.51"	20.86"
23"	22.51"	22.86"
24"	22.51"	22.86"
36"	34.51"	34.86"
48"	46.51"	46.86"
60"	58.51"	58.86"
72"	70.51"	70.86"
84"	82.51"	82.86"
96"	94.51"	94.86"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS VEVE™-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QTM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT




Small mounting accessory

Q-ANGLE




Adjustable mounting accessory

MMA-01



Magnet Mount Accessory of MG-01

MMA-04



Magnet Mount Accessory of MG-04

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


ESSENTIALS VEVE

Linear Fixture Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Compatible for use with QTL power supplies
- Surface mount
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

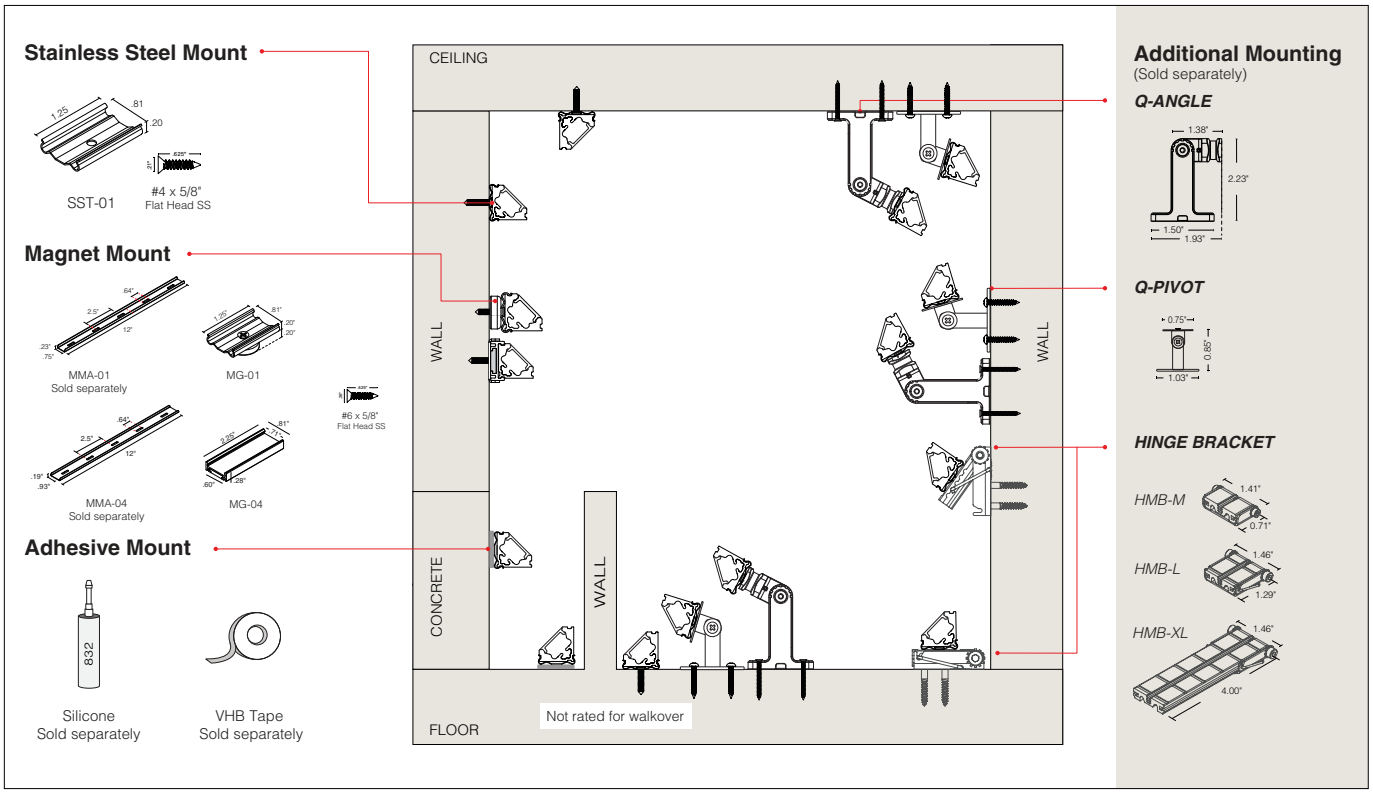


Surface Mounting Method

- VHB Mount (page 5-6)
- Silicone Mount (page 7)
- Screw Mount (page 8)
- Magnet Mount (page 9)
- Low Profile Magnet Mount (page 10)


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS VEVE


Linear Fixture Installation Instructions



VEVE-FLAT (01)






VEVE-OPTICS (02)



VEVE-ENCAPSULATED (03)


COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size

STAINLESS STEEL CLIP	MAGNET CLIP	LOW PROFILE MAGNET CLIP
 SST-01	 MG-01	 MG-04
Included: Flat Head Screw #4x5/8"	Included: Flat Head Screw #6x5/8"	Included: Flat Head Screw #6x5/8"
• 2 clips provided for 4' or less; 4 clips provided for greater than 4'	• One magnet clip per foot	• One magnet clip per foot

ACCESSORIES SOLD SEPARATELY

MAGNET MOUNT ACCESSORY; sold individually



MMA-01

Included: Flat Head Screw #6x5/8"

- MMA-01 comes in 12" pieces; use at least one clip per MMA-01 accessory
- MMA-01 can be cut into smaller pieces, if desired

HINGE BRACKET; sold individually





Image shows HMB-M

HMB-M
HMB-L
HMB-XL

Included:
- 3/4" long mount screw
- 1/4" #4 clip mount screw

Q-ANGLE; sold in pairs



Q-ANGLE

Included:
- 3/4" long mount screw
- 1/4" #4 clip mount screw


Q-PIVOT; sold in pairs



Q-PIVOT

Included:
- SS #4-40x3/16 Flat head screw
- 2 #4x3/4 Pan head screws

LOW PROFILE MAGNET MOUNT ACCESSORY; sold Individually




MMA-04

Included: 2 #6x5/8" Flat Head screws


- MMA-04 comes in 12" pieces; use at least one clip per MMA-04 accessory
- MMA-04 can be cut into smaller pieces, if desired

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


ADHESIVE SOLD SEPARATELY	
SILICONE	VHB TAPE; sold in 15' increments
 DOWSIL 832	 TAPE-VHB-IP20

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


CONTINUOUS WIRING CONFIGURATION OPTIONS




Single End Feed



Non-Continuous End Feed



Non-Continuous Corner Feed



Continuous End to End Feed

Review wire method to ensure clean installation prior to mounting finished fixture.


NOTE: Additional wire methods include:
S1: Connector/Wire Input only
P1: Connector/Wire Input and Output

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD

SURFACE PREPARATION


1

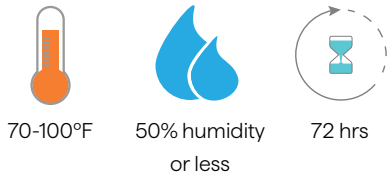

Temperature and environmental concerns:

- Ideal application environment is 70-100°F in 50% humidity or less.
- Minimum application temperature: 50°F
- This temperature and humidity should be maintained for 72 hours after application for maximum bond strength.


2

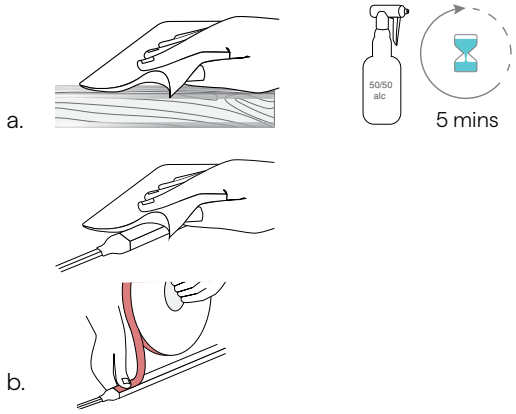

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the Fixture and the surface area where Fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

3

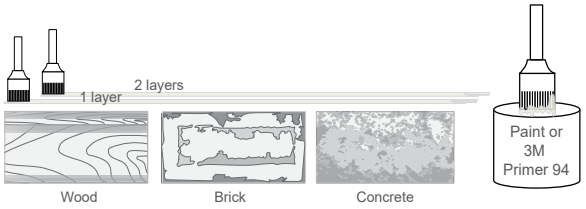


For porous materials (Wood, Brick, Concrete etc.) apply two layers of paint or primer to the surface. This will help create a better bonding surface for these materials. These can be purchased from a local hardware store.

MATERIALS	SUGGESTED EPOXIES
Concrete, Stone, Cinderblock, Metal, and Brick	Loctite Metal and Concrete Two-Part Epoxy
ABS, Fiberglass, Plastic, and PVC	Loctite Plastic Two-Part Epoxy
Tile, Wood, Ceramic, Glass, or Metal	Loctite Clear Two-Part Epoxy
All Purpose	Strong Stik


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **VHB ADHESIVE MOUNT**

BEFORE installation, the surface must be thoroughly cleaned and dried for maximum bond strength.

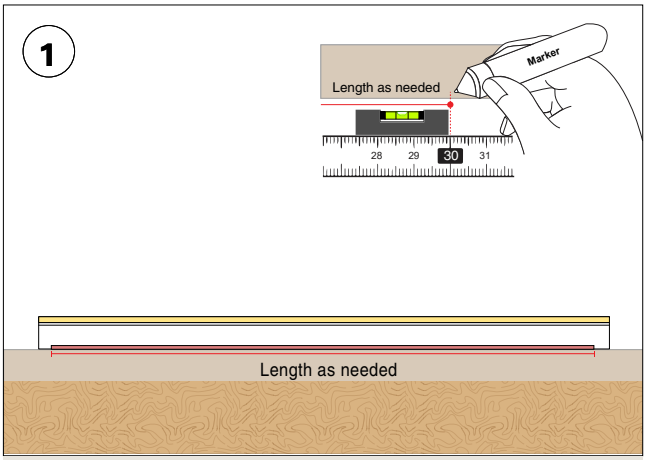


Determine the VEVE fixture(s) location and positioning on desired surface before adhering fixture to surface. Make any necessary reference markings to indicate fixture placement.

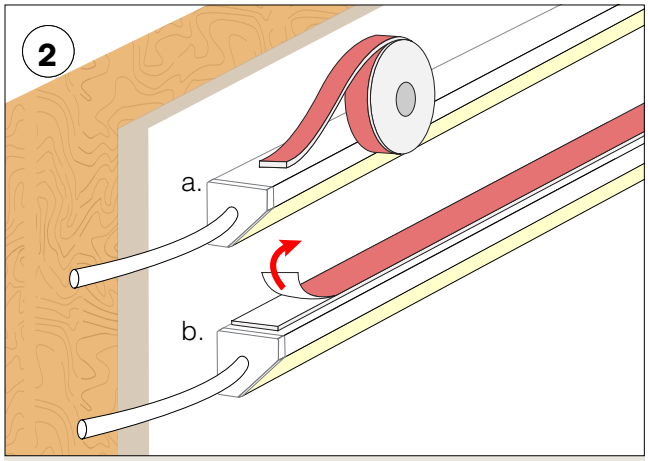

a. To adhere the VHB adhesive, peel the white film back while evenly applying the tape to the mounting side of the fixture. The red side should be visible.

b. Remove the red film and position fixture in place according to your previous reference marking(s).

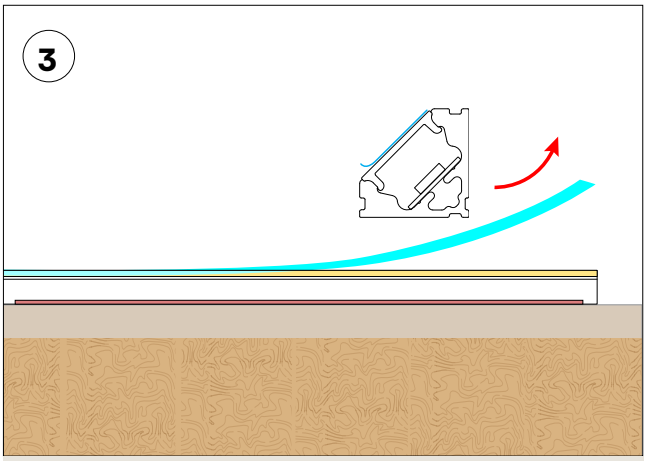

Remove protective film from the surface of the fixture's lens.

NOTES: *EPOXY ALTERNATIVE: For improved bonding strength, apply a small amount of epoxy at each end. Refer to table on* page 5 *for suggested epoxies. These can be purchased at a local hardware store. Please follow all manufacturer instructions for suggested epoxy.*


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

ESSENTIALS VEVE


Linear Fixture Installation Instructions

SURFACE MOUNTING METHOD: **SILICONE**

- 2 clips provided for 4’ or less; 4 clips provided for greater than 4’

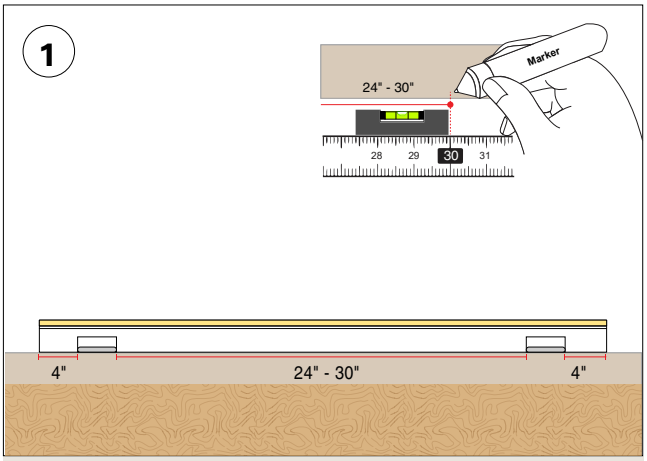

Determine the VEVE fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24” - 30”.

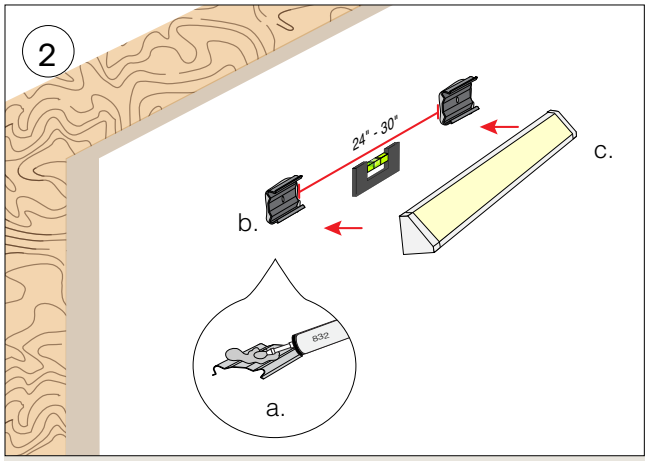


a. Firmly press the silicone-coated clips on the marked reference points.

b. Wait for silicone adhesive to cure completely before snapping fixture into place.

c. Snap fixture onto clips.

NOTE: Cure time is dependent on the type of silicone adhesive used. Refer to silicone product manufacturer for accurate drying time.

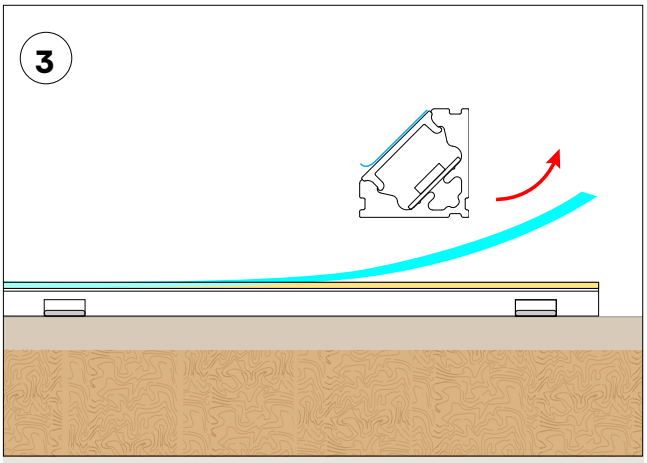


Remove protective film from the surface of the fixture’s lens.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SCREW MOUNT**

- 2 clips provided for 4’ or less; 4 clips provided for greater than 4’

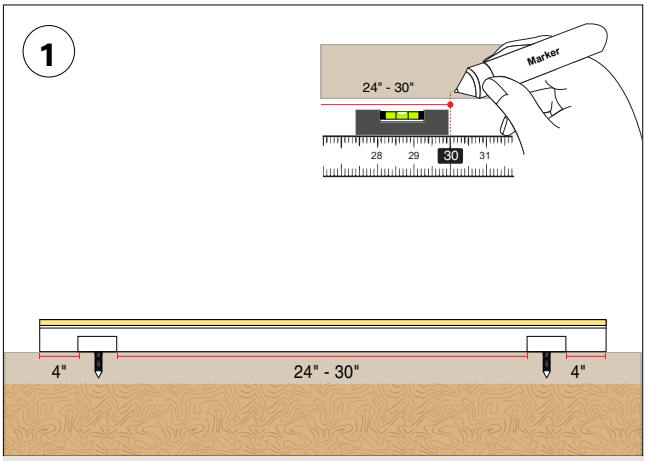

Determine the VEVE fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24” - 30”.

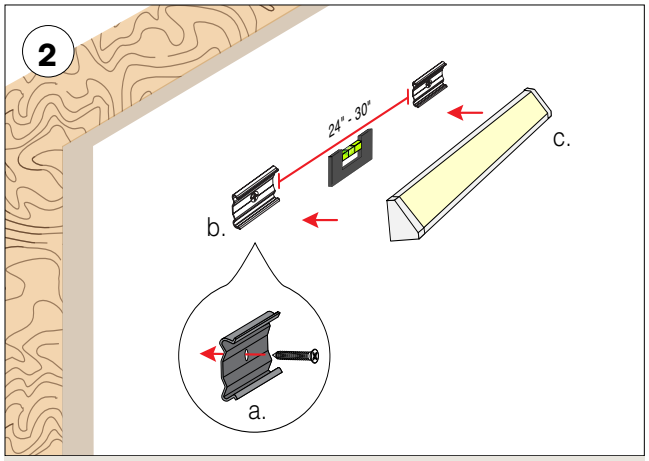


a. Secure clips using the #4 flat head hardware provided.

b. Ensure the screw head is flush with the clip’s base.

c. Snap fixture onto clips.

NOTE: Flat head screw type is dependent on surface/application material. Alternative flat head screws may be required. Refer to the surface material manufacturer for suggested screw type.

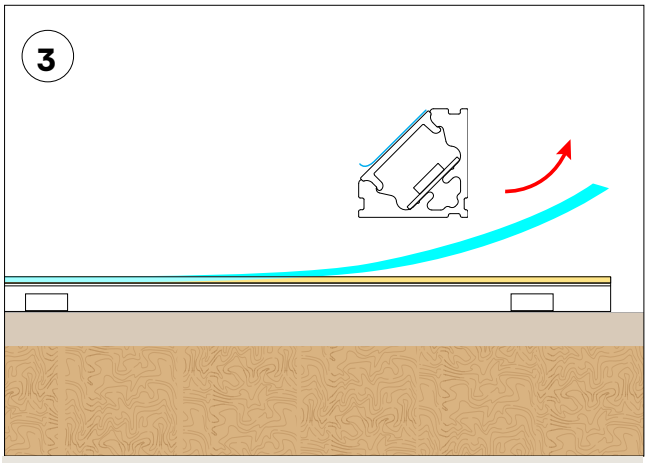


Remove protective film from the surface of the fixture’s lens.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **MAGNET MOUNT**

- One magnet clip per foot
- MMA-01 comes in 12" pieces; use at least one clip per MMA-01 accessory
- MMA-01 can be cut into smaller pieces, if desired

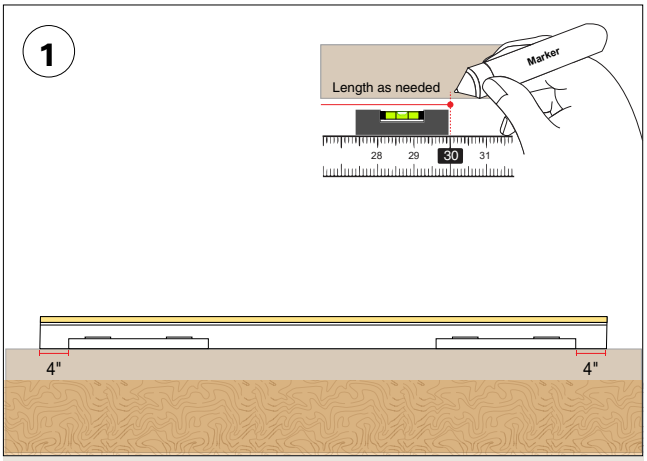

Determine the VEVE extrusion(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place.

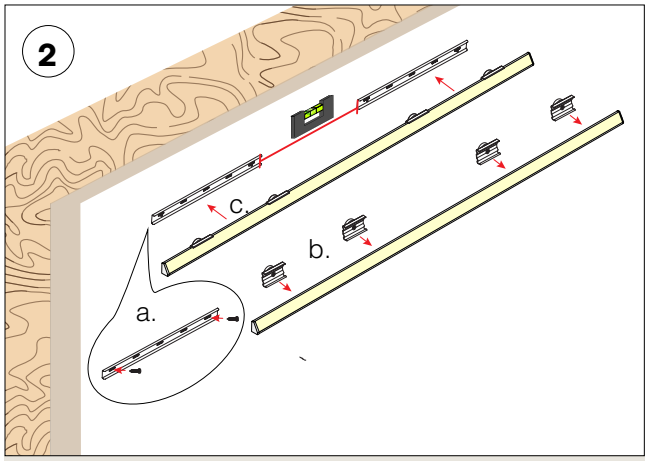


a. Mount the two #6 flat head screws into the 12" magnet mount accessory bracket through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

b. Snap the magnet clips onto the backside of the extrusion. They should be offset to the accessory bracket screws to maximize magnetic connection.

c. Place the assembled fixture into the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

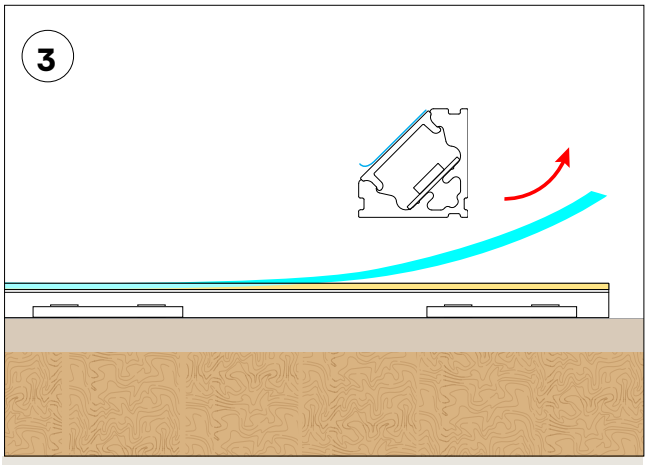


Remove protective film from the surface of the extrusion's lens.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **LOW PROFILE MAGNET MOUNT**

- One magnet clip per foot
- MMA-04 comes in 12" pieces; use at least one clip per MMA-04 accessory
- MMA-04 can be cut into smaller pieces, if desired

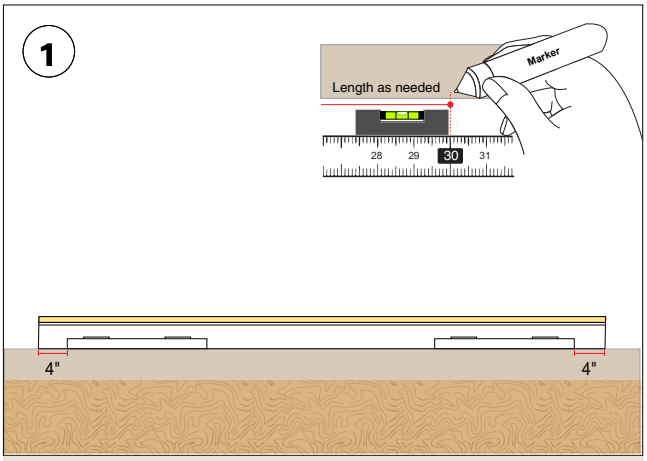

Determine the VEVE fixture(s) location and positioning on desired surface. Make any necessary reference markings to indicate where the magnet mount accessory bracket is to be secured in place.

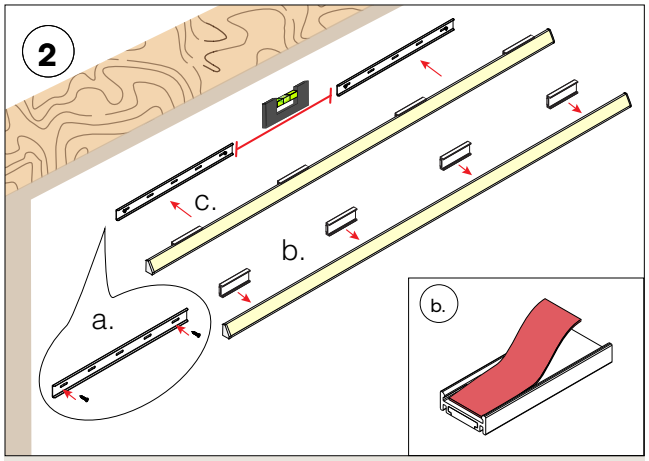


a. Mount the two #6 flat head screws into the magnet mount accessory bracket through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

b. Snap the magnet clips onto the backside of the fixture. They should be offset to the accessory bracket screws to maximize magnetic connection. If the clip does not fit securely onto the extrusion, apply the provided foam onto the inner face of the magnet clip.

c. Place the assembled fixture into the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

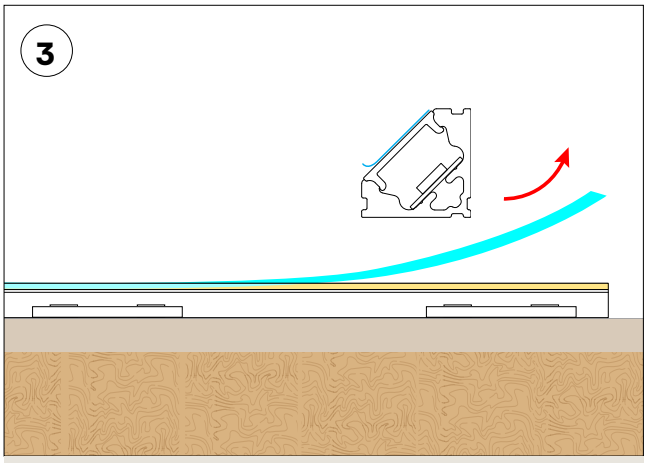

Remove protective film from the surface of the fixture's lens.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VEVE-OPTICS (02) Linear Fixtures

STATIC WHITE - 5.0W/FT

VV2SW-5.0-30-DRY-STD-20

3104 K

CRI: 98.2

CRI R9: 95.1

TM30 Rf: 94.1

TM30 Rg: 100.7

CQS: 95.2


X: 0.428


Y: 0.398


U: 0.248

V: 0.345

Δuv: -0.0013







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.3	99.3	97.0	99.3	98.6	97.0	98.1	97.7	95.1	98.9	97.0	82.9	98.4	97.3	98.4
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.5	96.9	91.6	91.9	94.9	97.9	95.3	96.8	97.3	97.0	97.4	98.2	98.3	96.2	95.5
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.9	97.6	96.7	95.0	93.5	97.2	93.3	98.0	93.6	90.3	90.6	92.0	95.1	92.8	92.3	90.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	1%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	0%	5%
10	90	1%	6%
11	91	3%	6%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%

VV2SW-5.0-30-DRY-STD-45

3102 K

CRI: 98.2

CRI R9: 95.4

TM30 Rf: 94.1

TM30 Rg: 100.7

CQS: 95.2


X: 0.428


Y: 0.398


U: 0.248

V: 0.345

Δuv: -0.0012







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.4	99.3	97.1	99.4	98.6	97.1	98.1	97.8	95.4	98.9	97.1	82.9	98.5	97.3	98.4
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.5	96.9	91.7	91.9	94.8	97.8	95.4	96.9	97.4	97.1	97.5	98.2	98.3	96.2	95.5
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.9	97.7	96.7	94.9	93.5	97.2	93.3	97.9	93.5	90.3	90.7	92.1	95.1	92.8	92.3	90.2

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	0%	5%
10	90	1%	6%
11	91	3%	6%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%

© 2021 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com

VEVE-OPTICS (02) Linear Fixtures

STATIC WHITE HIGH EFFICACY - 6.0W/FT

VV2SW-6.0HE-30-DRY-STD-20

3104 K

CRI: 98.2

CRI R9: 95.1

TM30 Rf: 94.1

TM30 Rg: 100.7

CQS: 95.2


X: 0.428


Y: 0.398


U: 0.248

V: 0.345

Δuv: -0.0013







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.3	99.3	97.0	99.3	98.6	97.0	98.1	97.7	95.1	98.9	97.0	82.9	98.4	97.3	98.4
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.5	96.9	91.6	91.9	94.9	97.9	95.3	96.8	97.3	97.0	97.4	98.2	98.3	96.2	95.5
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.9	97.6	96.7	95.0	93.5	97.2	93.3	98.0	93.6	90.3	90.6	92.0	95.1	92.8	92.3	90.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	1%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	0%	5%
10	90	1%	6%
11	91	3%	6%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%

VV2SW-6.0HE-30-DRY-STD-45

3102 K

CRI: 98.2

CRI R9: 95.4

TM30 Rf: 94.1

TM30 Rg: 100.7

CQS: 95.2


X: 0.428


Y: 0.398


U: 0.248

V: 0.345

Δuv: -0.0012







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.4	99.3	97.1	99.4	98.6	97.1	98.1	97.8	95.4	98.9	97.1	82.9	98.5	97.3	98.4
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
93.5	96.9	91.7	91.9	94.8	97.8	95.4	96.9	97.4	97.1	97.5	98.2	98.3	96.2	95.5
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.9	97.7	96.7	94.9	93.5	97.2	93.3	97.9	93.5	90.3	90.7	92.1	95.1	92.8	92.3	90.2

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-2%	-1%
5	94	-4%	1%
6	97	0%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	0%	5%
10	90	1%	6%
11	91	3%	6%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-2%
16	90	2%	-8%


© 2021 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com

MATERIAL RECYCLING

LINEAR FIXTURES/EXTRUSIONS

You may be done with your products, but chances are they still have more to give. Follow these instructions to break down and sort recyclable components. Check with local recycling collection to ensure they accept the materials listed below.

Additionally, Q-Tran offers a Takeback Program. Contact factory for information.

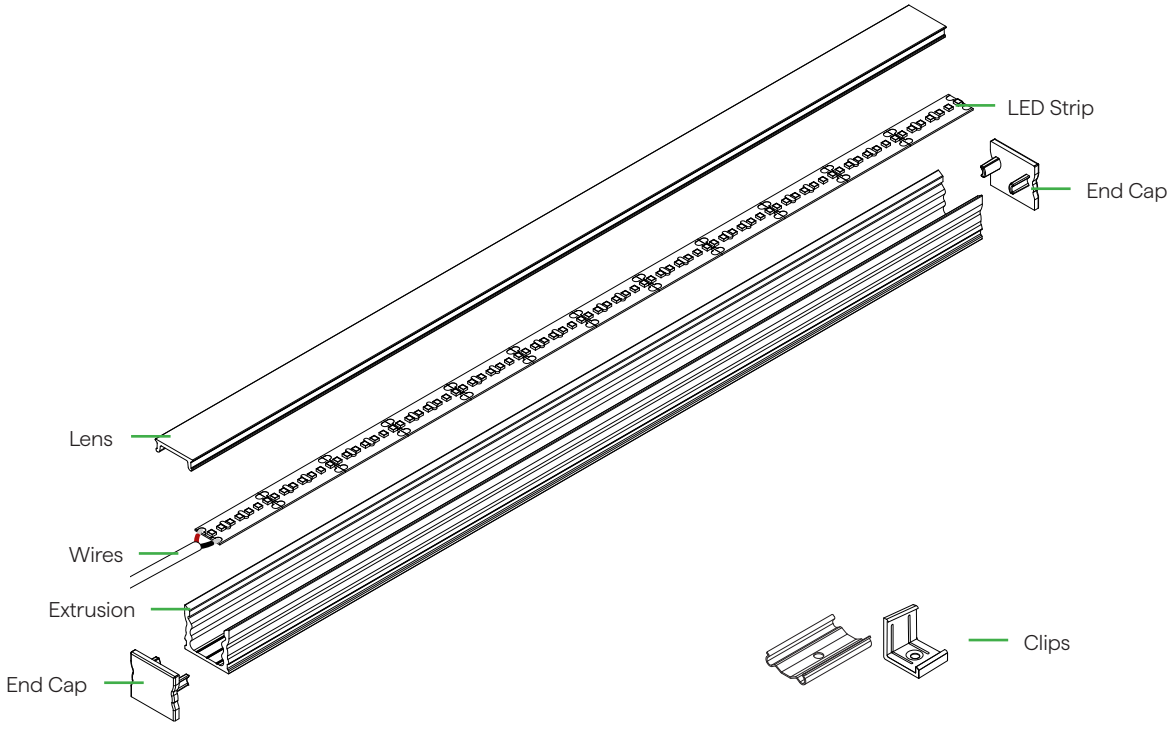

7	E	41	40
Lens Plastic End Caps Plastic Clips	LED Strip Wires	Extrusion Metal End Caps	Stainless Steel Clips

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting