

EXCELSIOR IN-2

12V MR16 35W Halogen/8W LED In Ground Light

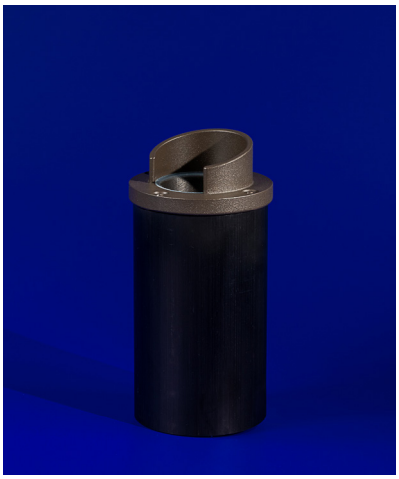

IN-2 Shown in Bronze Texture Powder Coat Finish (BZT)

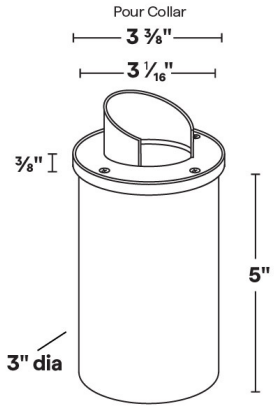

Dimensions: 3" dia. x 5" tall housing

- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Tempered glass lens.
- Pour collar option available.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 3W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Pin Porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.
- UL Listed for USA market

1 PRODUCT	2 MATERIAL	3 CUTOFF HEIGHT	4 OPENING SIZE	5 POUR COLLAR	6 FINISH
IN-2	A				

Sample Part Number: **IN-2-A-S-90-0-BK-9.0-30-45**

1 PRODUCT

IN-2	

2 MATERIAL

A	Aluminum

3 CUTOFF HEIGHT

S	Short (1")
T	Tall (1 1/2")

4 OPENING SIZE

90	90 Degree Opening
90	90 Degree Opening
180	180 Degree Opening

5 POUR COLLAR

0	None (Standard)
PC	Pour Collar (Optional)

6 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-09-22-26

EXCELSIOR IN-2

12V MR16 35W Halogen/8W LED In Ground Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Aluminum

6 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

ACCESSORIES - LENS

Holds up to two accessories

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-09-22-26

EXCELSIOR IN-2

12V MR16 35W Halogen/8W LED In Ground Light

LAMPS

MR16 Halogen or LED; GU5.3 bi pin porcelain socket
Maximum wattage: 35W Halogen/8W LED

MR16	MR16
	
EMERY ALLEN	EMERY ALLEN
1.0W, 3.0W, 5.0W, 7.0W, 8.0W	3.0W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting