
EXCELSIOR IN-5

12V MR16 35W Halogen/8W LED In-Ground Well Light



IN-5 Shown in Bronze Texture Powder Coat Finish (BZT)

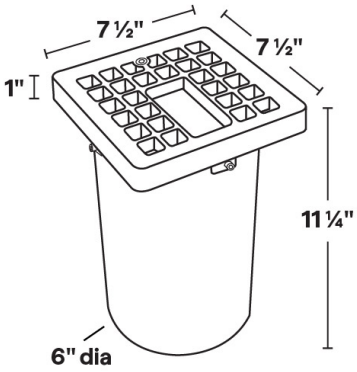

Dimensions: 7 1/2 " square x 11 1/4" height

- Bronze frame and grate.
- Hot-aiming option available.
- 18 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- 6' of 16/2 low voltage cable supplied.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.
- UL Listed for USA market

1 PRODUCT	2 MATERIAL	3 AIMING	4 FIXTURE REGRESS	5 FINISH
IN-5	B			

Sample Part Number: **IN -5-B-H-1-BK**

1 PRODUCT

IN-5

2 MATERIAL

B	Bronze

3 AIMING

S	Standard
H	Hot Aim

4 FIXTURE REGRESS

1	1 3/4"
2	3" (standard)
3	4 1/4" (hot-aim)

5 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White
DB	Dark Bronze
P	Polished

DB finish has longer lead time

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-28-26

EXCELSIOR IN-5

12V MR16 35W Halogen/8W LED In-Ground Well Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Bronze

5 FINISH

Eight Standard TGIC Free powder coat finishes and Two natural finish available



Beige

Black

Black Texture

Bronze

Bronze Texture



Black Bronze

Dark Bronze

Natural

Silver

White

ACCESSORIES - LENS

Holds up to three accessories

SP




Spread Lens

LI



Linear Lens

SO



Softening Lens

LV



Louver Lens

WI



Wire Holder

FR



Frosted Lens

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-28-26

EXCELSIOR IN-5

12V MR16 35W Halogen/8W LED In-Ground Well Light

To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W, 7.0W, 8.0W

MR16



EMERY ALLEN

3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting