

MICRO 5 ATOM-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed





- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- 60% smaller than ESSENTIALS-TORQ
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Features a stainless steel mounting clip, making installation and repositioning effortless
- Red, Green, and Blue LED allows for color changing applications
- Consult factory for field assembly options

Specify either factory assembled fixtures or field assembled extrusions and LEDs.

A LEDs will be installed into a complete fixture. Ideal for single fixtures. Avoids installers needing to handle the delicate 5mm LED.

OR

B Extrusions and LEDs will be shipped not installed. Ideal for long runs or light with no interruptions in LED up to Class 2 limitations. Due to the delicate nature of the 5mm LED, care must be taken in the installation process

A. Factory Assembled Option

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5
PRODUCT	WATTS/ FT	CCT	RATED	LENS
ATOM-01-RGB	4.0	RGB		

ADDITIONAL INFORMATION REQUIRED TO ORDER

A6	A7	A8	A9	A10	A11	A12	A13	A14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
					SST			

Sample Part Number: **ATOM-01-RGB-4.0-RGB-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E**

A1 PRODUCT

ATOM-01-RGB

See following pages for compatible power supplies.

A2 WATTS/FT

4.0 4.0W/ft

A3 CCT

RGB

A4 RATED

DRY IP20
DMP IP54

A5 LENS

DF Diffused
FR Frosted

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

A6 WIRE INPUT/ OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed
S3 Left Side Feed
S4 Right Side Feed

For continuous mounting, consider bottom feed.

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed
P3 Left Side Feed
P4 Right Side Feed

For continuous mounting, consider bottom feed.

A7 CONNECTOR/ WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A8 CONNECTOR/ WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 WIRE COLOR

WH White
BK Black

A10 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

A11 MOUNTING

SST Stainless Steel

A12 FINISH

ST Satin
BK Black
CU Custom

Custom finishes require a longer lead time, consult factory

A13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

A14 EXACT/ OPTIMAL

E Exact specified length
O Optimal illumination

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-08-26

MICRO 5 ATOM-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

B. Field Assembled Option

EXTRUSION ORDERING

B1 PRODUCT	B2 FINISH	B3 MOUNTING	B4 LENS	B5 WIRE INPUT/ OUTPUT	B6 EXTRUSION LENGTH (IN)
ATOM-01		SST		NI	

LED STRIP ORDERING

B7 V/ WATTS	B8 RATED	B9 CCT - LUMENS/ CRI	B10 CONNECTOR/ WIRE IN	B11 CONNECTOR/ WIRE OUT	B12 WIRE COLOR	B13 WIRE TYPE	B14 ILLUMINATED LENGTH
RGB24-5MM/4.0		RGB	BW	CLS		CL2	

EXTRUSION ORDERING

Sample Part Number: **ATOM-01-ST-SST-DF-NI-98.43"**

B1 PRODUCT

ATOM-01

B2 FINISH

ST Satin
BK Black
CU Custom

Custom finishes require a longer lead time, consult factory

B3 MOUNTING

SST Stainless Steel

B4 LENS

DF Diffused
FR Frosted

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

B5 WIRE INPUT/OUTPUT

NI Not Installed

B6 EXTRUSION LENGTH (IN)

1" increments from 1" - 98.43"
Extrusion Tolerance +0 -1/8".

LED STRIP ORDERING

Sample Part Number: **RGB24-5MM/4.0-DRY-RGB-BW-CLS-WH-CL2-100"**

B7 V/WATTS

RGB24-5MM/4.0

Wattage: 4.0W/ft
Voltage: 24VDC
See following pages for compatible power supplies.

B8 RATED

DRY IP20
DMP IP54

B9 CCT - LUMENS/CRI

RGB

B10 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")

B11 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

B12 WIRE COLOR

WH White
BK Black

B13 WIRE TYPE

CL2 Class 2

B14 ILLUMINATED LENGTH

2"-288" in 2" increments

Order LED length needed for each run. Lengths cannot exceed 24' (Class 2). All lengths will have a 2' soldered lead wire attached. This product is not to be field-soldered.

REQUIRED ACCESSORY

UNIV-ROLLER




Roller tool used to lay MICRO 5 LED strips into extrusion housing

Included and required for all MICRO 5 field assembled options

To order additional, use UNIV-ROLLER


END CAPS

One pair of end caps is provided with each length of extrusion ordered.



Feed

To order separately, use ATOM-EC



No Feed

To order separately, use ATOM-EC


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-08-26


MICRO 5 ATOM-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed


A1 / B1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens and stainless steel mounting clip



Profile with external louver



Profile with stainless steel mounting clip & external louver

A2 / B9 DELIVERED LUMENS

[Calculated L70 = 52000 hrs]
Tested with ATOM-01-RGB-4.0-RGB-DRY

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
FR	32	629	101	523	30	470	146
DF	21	631	61	523	19	471	88

A5 / B4 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens in green

TEMPERATURE RATINGS

		4.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-08-26

MICRO 5 ATOM-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed


A6 WIRE INPUT/OUTPUT

SINGLE (Input only)

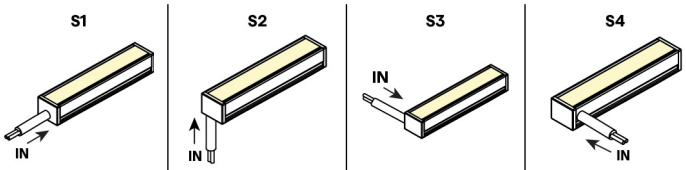


End Feed | Bottom Feed | Side Feed - Left | Side Feed - Right

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

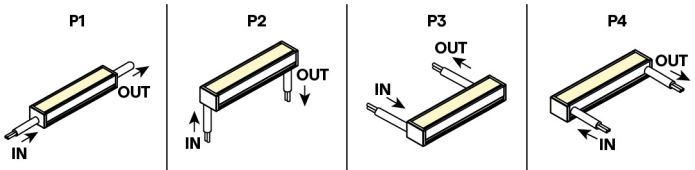


End Feed | Bottom Feed | Side Feed - Left | Side Feed - Right

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others


Non-Continuous End Feed




Continuous Bottom Feed



Continuous Side Feed - Left




Continuous Side Feed - Right



Continuous End to End Feed

A7 / A8 / B10 / B11 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed

A9 / B12 WIRE COLOR

White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-08-26

MICRO 5 ATOM-FLAT (01) RGB


24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY

PLASTIC




L1-XX




WH BK





Profile with external louver

MICRO EXTERNAL LOUVER KIT




12.25" external louver, louver connector, 2x SST-01 clips, and 2x gaskets

Sold separately

To order kits:
White: MICRO5-L1-KIT-WH
Black: MICRO5-L1-KIT-BK

Each kit comes with 2x #4 x 5/8" Flat Head SS

MICRO EXTERNAL LOUVER END CAPS




1 feed and 1 no feed end cap

Sold separately for field assembly only

To order kits:
White: MICRO5-L1-EC-WH
Black: MICRO5-L1-EC-BK

A11 / B3 MOUNTING

SST



Stainless Steel Clip

2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'

To order separately use SST-08

Each clip comes with a #4 x 5/8" Flat Head SS

A12 / B2 FINISH

Satin

Black

Custom finishes require a longer lead time, consult factory

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-10-08-26


MICRO 5 ATOM-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

A14 EXACT/OPTIMAL FIXTURE LENGTH


E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.








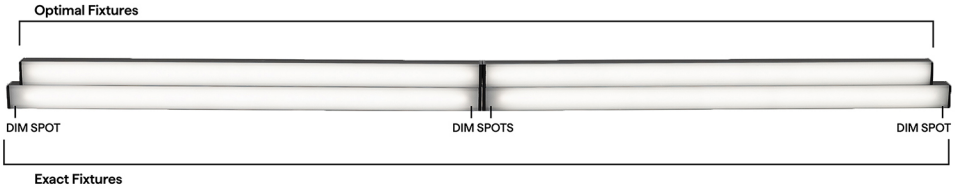


RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 & S3 & S4				P1 & P2 & P3 & P4			
								
	End Feed	Bottom Feed	Side Feed - Left	Side Feed - Right	End Feed	Bottom Feed	Side Feed - Left	Side Feed - Right
12"	10.48"				10.83"			
13"	12.48"				12.83"			
14"	12.48"				12.83"			
15"	14.48"				14.83"			
16"	14.48"				14.83"			
17"	16.48"				16.83"			
18"	16.48"				16.83"			
19"	18.48"				18.83"			
20"	18.48"				18.83"			
21"	20.48"				20.83"			
22"	20.48"				20.83"			
23"	22.48"				22.83"			
24"	22.48"				22.83"			
36"	34.48"				34.83"			
48"	46.48"				46.83"			
60"	58.48"				58.83"			
72"	70.48"				70.83"			
84"	82.48"				82.83"			
96"	94.48"				94.83"			

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 ATOM-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-S



Adjustable mounting bracket - Small

QUOVA-MICRO



QUOVA Knife Edge

VHB




Double sided mounting tape

NJ-MICRO



J Mounting Bracket

BL-MICRO



Backwards L Mounting Bracket

NL-MICRO



L Mounting Bracket


SD-L-MICRO



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 ATOM

Factory and Field Assembled Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Warranty only valid with QTL power supplies
- Surface mount or recessed in millwork
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

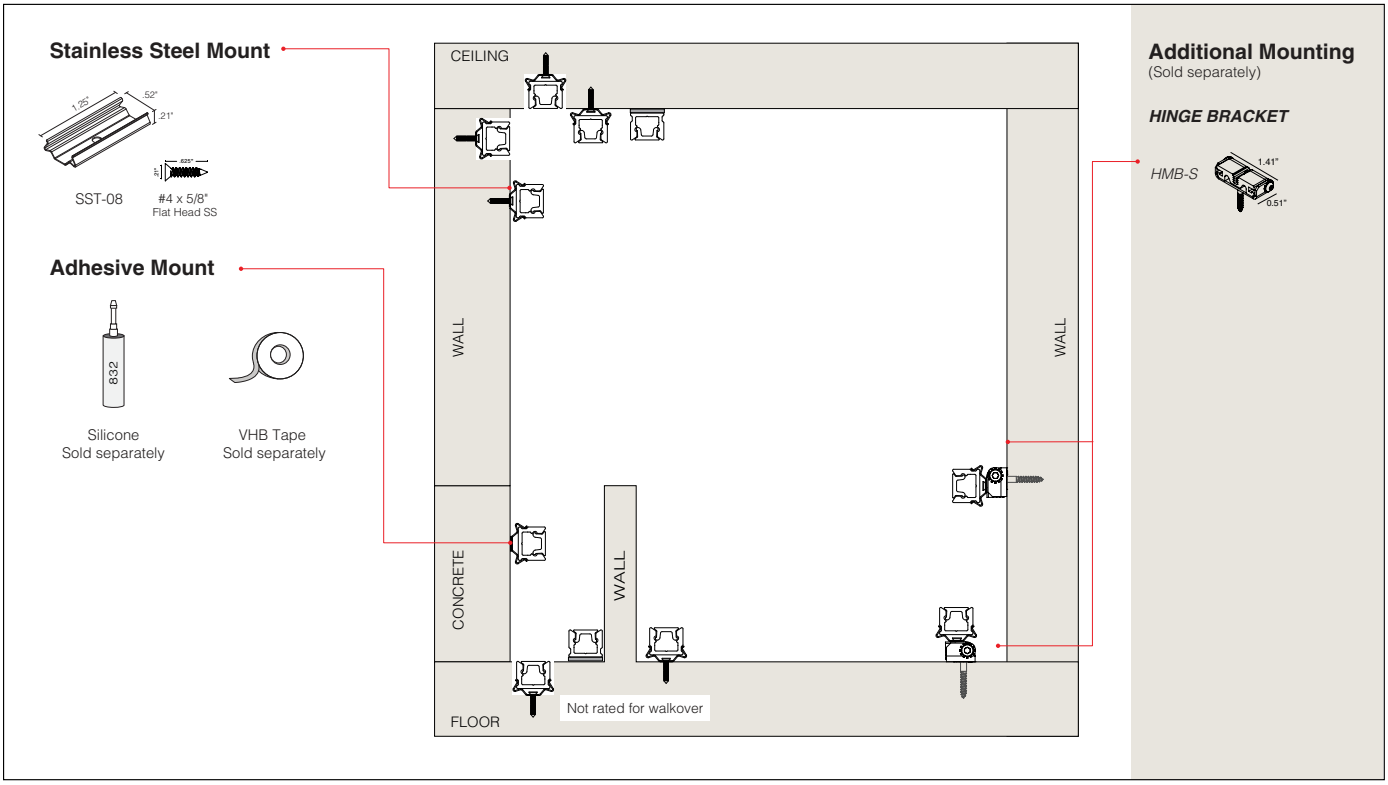

Preparation

- Components & Hardware (page 2)
- Cutting & Configuration Options (page 3)
- Surface Preparation & Assembly (page 4-7)

Surface Mounting Method

- VHB Mount (page 8)
- Silicone Mount (page 9)
- Screw Mount (page 10)

Recessed Mounting Method

- Screw Mount: Millwork (page 11)


Louver Mounting Method

- Clip-Over Louver (page 12)
- Screw Mount (page 13)


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 ATOM


Factory and Field Assembled Installation Instructions




ATOM-FLAT (01)



ATOM-OPTICS (02)



ATOM-ENCAPSULATED (03)




ATOM-LOUVER (05)

COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size

STAINLESS STEEL CLIP




SST-08

Included	
	Flat Head Screw #4x5/8"

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'

REQUIRED ACCESSORY




UNI-ROLLER

Included
Included and required for all MICRO 5 field assembled options

- Roller tool used to lay MICRO 5 LED strip into extrusion housing. To order additional use UNI-ROLLER

ACCESSORIES SOLD SEPARATELY

HINGE BRACKET; sold individually




HMB-S

Included
• 3/4" long mount screw • 1/4" #4 clip mount screw


ADHESIVE SOLD SEPARATRLY

SILICONE



DOWSIL 832


VHB TAPE; sold in 15" increments




TAPE-VHB-IP20

MICRO EXTERNAL LOUVER KIT

Sold separately




12.25" External Louver



SST-01

Included	
	(2X) Flat Head Screw #4x5/8"



Louver Connector


Included	
	(2X) Gaskets

- 12.25" external louver, louver connector, (2x)SST-01, (2x) Flat Head Screw #4x5/8", and (2x)gaskets


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

CUTTING EXTRUSIONS FOR IN-FIELD ASSEMBLY INSTALLATION

QTL strongly recommends cutting the extrusion and lens together to achieve a clean cut.

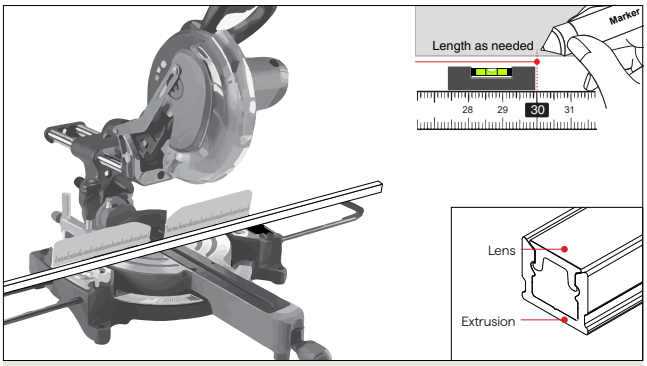

OR

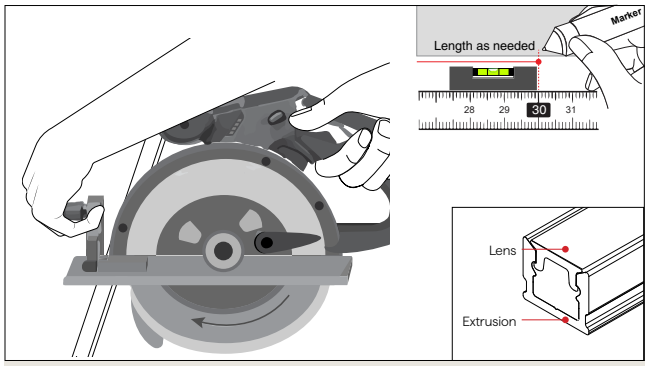


To achieve corners or angles, measure the LED extrusion to desired length and cut with a miter saw.


For straight runs, measure LED extrusion to desired length and cut it with a circular saw.


NOTE: Using the proper blade for aluminum, cut to the desired length. Recommend using a 10 in.x 80 tooth medium aluminum saw blade.


CONFIGURATION OPTIONS


ATOM-FLAT
















ATOM-OPTICS












Review wire method to ensure clean installation prior to mounting extrusion.

NOTE: Additional wire methods include:
S1, S2,: Connector/Wire Input only
P1, P2: Connector/Wire Input and Output


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

LED INSERTION FOR IN-FIELD ASSEMBLY INSTALLATION


STRIP IN EXTRUSION

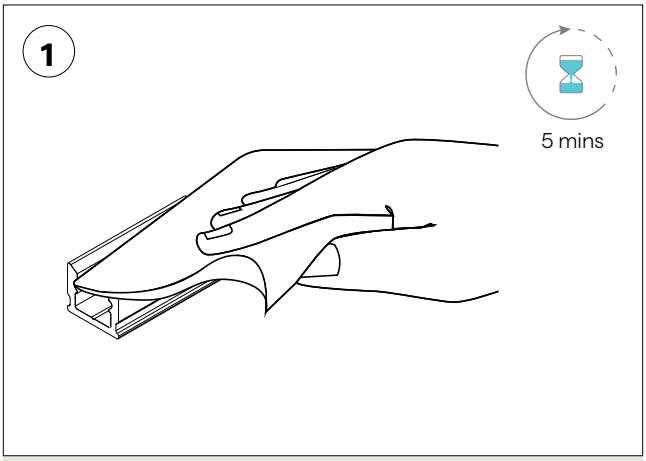

- Using a 50/50 alcohol mix throughly clean, the surface of the extrusion and the multi-tray surface. Allow time to dry (about 5 minutes).

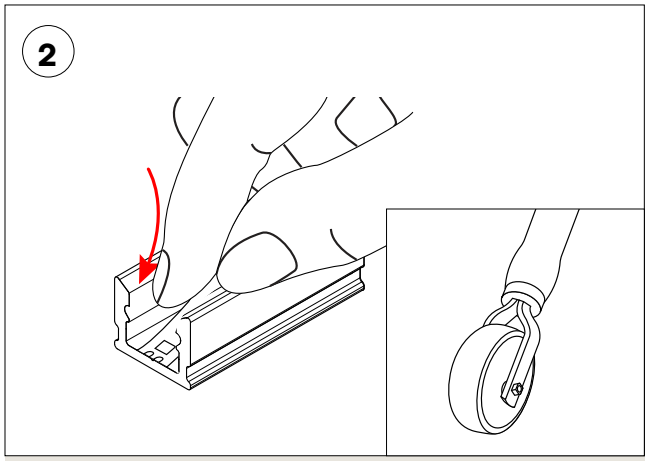


- Gently place LED in extrusion/tray. Apply firm pressure to fully adhere to the extrusion. This reduces the possibility that dust and debris will contaminate the adhesive.
- Use the UNI-ROLLER tool to place MICRO 5 LED strip into extrusion housing. If needed, you may order additional UNI-ROLLER tools.

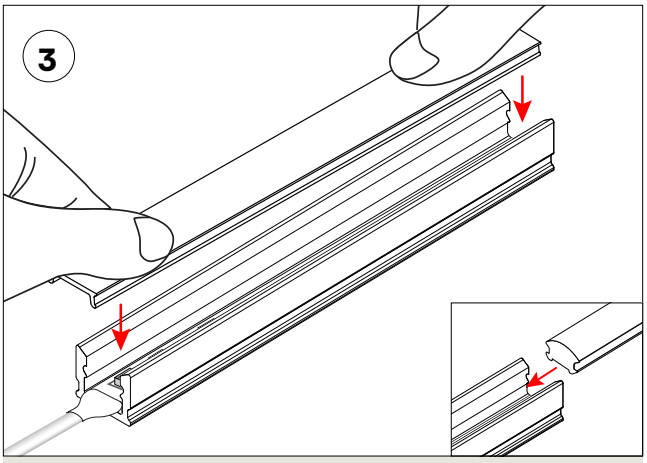

Flat Lenses: Apply uniform pressure until the extrusion and lens snap securely together.

Optical and Inner Louver Lens: Starting from one end of the extrusion, slide the lens into the grooved lip of the extrusion until secured in place.

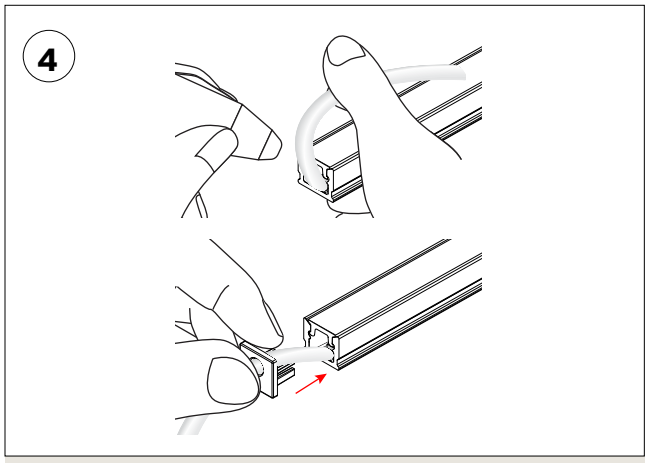


- Add glue inside the end cap and glue around edges to secure end cap in place. Do not allow glue to come in contact with LED.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD

SURFACE PREPARATION


1

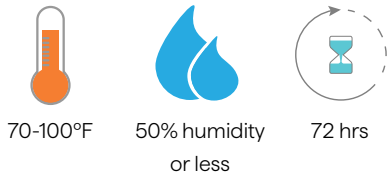

Temperature and environmental concerns:

- Ideal application environment is 70-100°F in 50% humidity or less.
- Minimum application temperature: 50°F
- This temperature and humidity should be maintained for 72 hours after application for maximum bond strength.


2

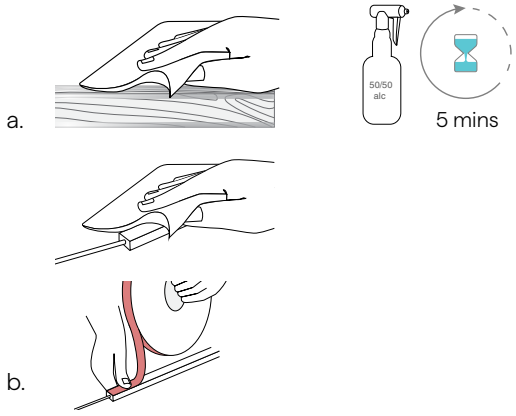

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the fixture and the surface area where fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

3

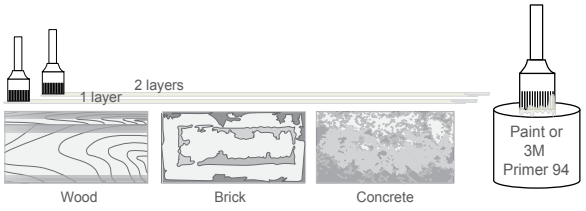


For porous materials (Wood, Brick, Concrete etc.) apply two layers of paint or primer to the surface. This will help create a better bonding surface for these materials. These can be purchased from a local hardware store.

MATERIALS	SUGGESTED EPOXIES
Concrete, Stone, Cinderblock, Metal, and Brick	Loctite Metal and Concrete Two-Part Epoxy
ABS, Fiberglass, Plastic, and PVC	Loctite Plastic Two-Part Epoxy
Tile, Wood, Ceramic, Glass, or Metal	Loctite Clear Two-Part Epoxy
All Purpose	Strong Stik


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **VHB ADHESIVE MOUNT**

BEFORE installation, the surface must be thoroughly cleaned and dried for maximum bond strength.

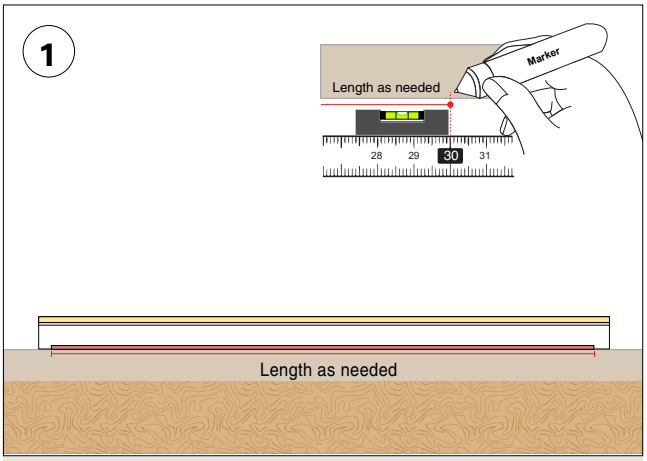


Determine the ATOM fixture(s) location and positioning on desired surface before adhering Fixture to surface. Make any necessary reference markings to indicate fixture placement.

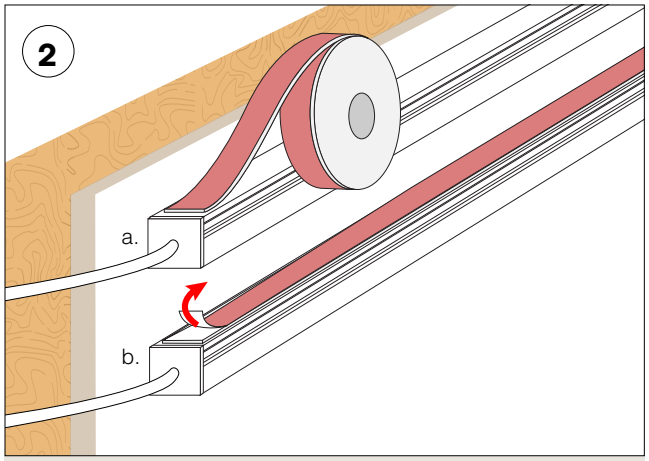

a. To adhere the VHB adhesive, peel the white film back while evenly applying the tape to the mounting side of the fixture. The red side should be visible.

b. Remove the red film and position fixture in place according to your previous reference marking(s).

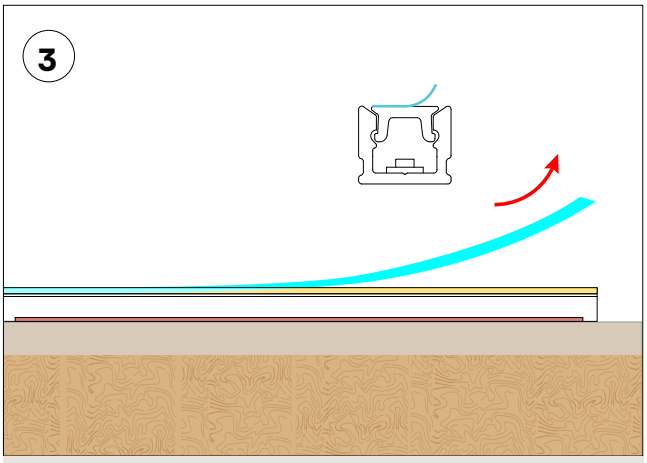


Remove protective film from the surface of the fixture's lens.

NOTES: *EPOXY ALTERNATIVE: For improved bonding strength, apply a small amount of epoxy at each end. Refer to table on* page 5 *for suggested epoxies. These can be purchased at a local hardware store. Please follow all manufacturer instructions for suggested epoxy.*


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SILICONE**

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'.

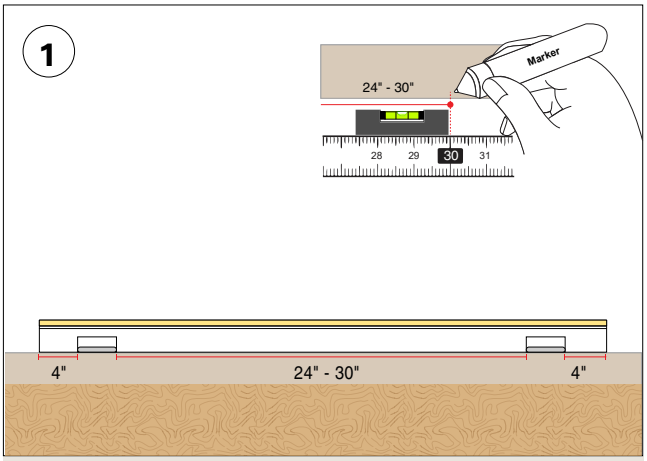

Determine the ATOM fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24" - 30".

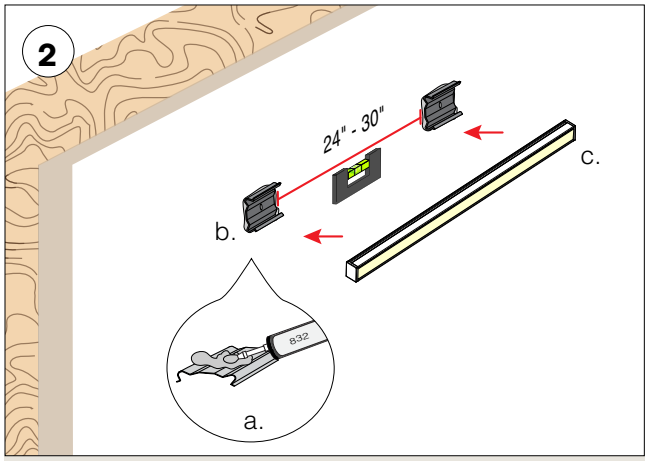


a. Firmly press the silicone-coated clips on the marked reference points.

b. Wait for silicone adhesive to cure completely before snapping fixture into place.

c. Snap fixture onto clips.

NOTE: Cure time is dependent on the type of silicone adhesive used. Refer to silicone product manufacturer for accurate drying time.

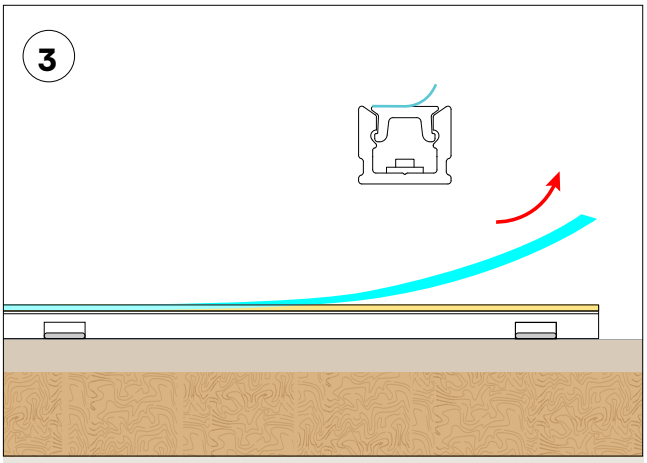


Remove protective film from the surface of the fixture's lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SCREW MOUNT**

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'.

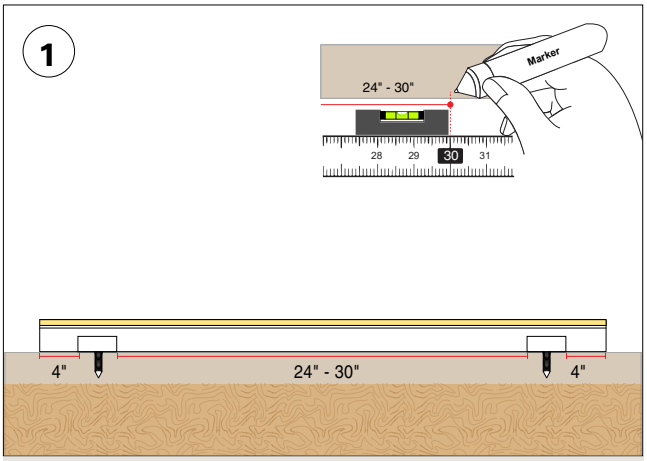

Determine the ATOM fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24" - 30".

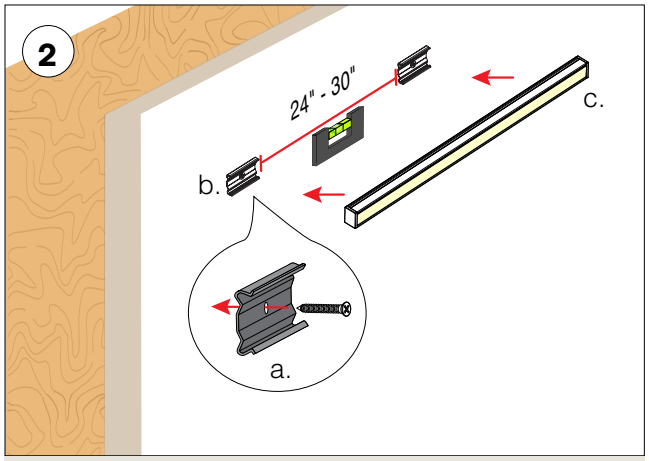


a. Secure clips using the #4 flat head hardware provided.

b. Ensure the screw head is flush with the clip's base.

c. Snap fixture onto clips.

NOTE: Flat head screw type is dependent on surface/application material. Alternative flat head screws may be required. Refer to the surface material manufacturer for suggested screw type.

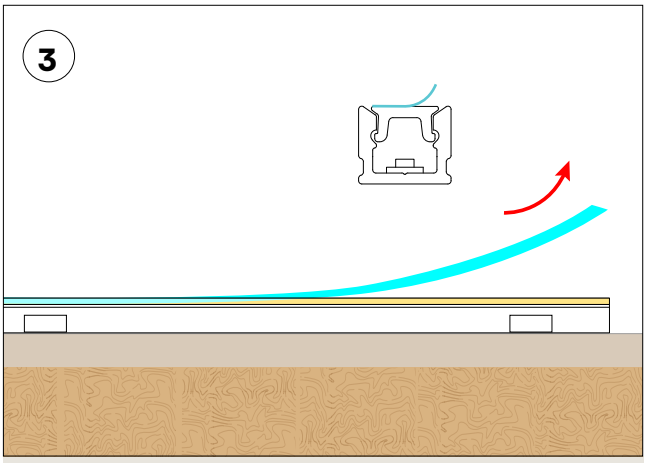


Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


RECESSED MOUNTING METHOD: **SCREW MILLWORK**

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'.

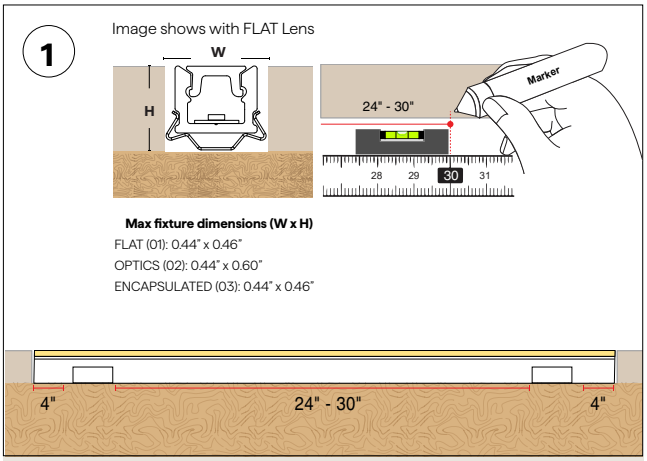

Determine the ATOM fixture(s) location and positioning on desired surface. Make any necessary reference markings.


NOTE: Depth of the channel in the millwork is dependent on overall height with the Stainless Steel Mounting Clip. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

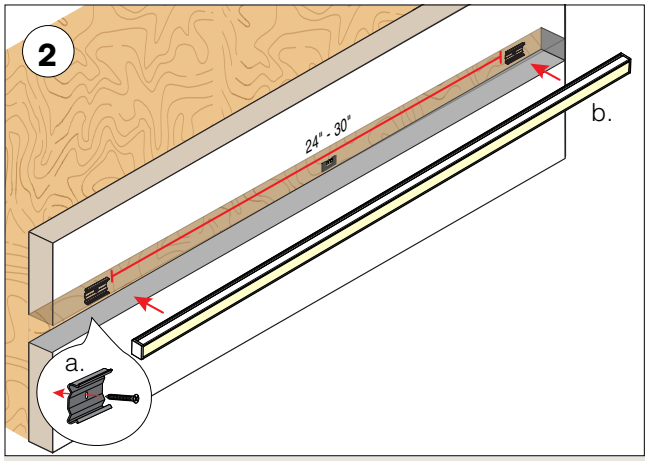

a. Mount the #4 flat head screw into the clip.

b. Snap the assembled fixture onto the clip

NOTE: If surface application requires a longer screw, the screw size must be a #4 Flat Head. Flat head screw type is dependent on surface/application material. Alternative flat head screws may be required. Refer to the surface material manufacturer for suggested screw type.

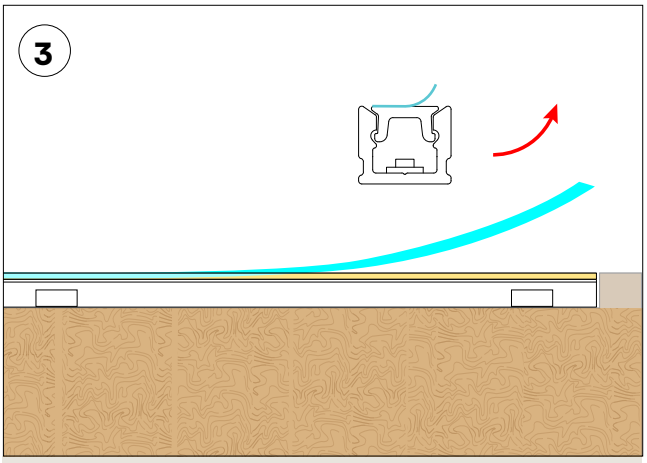

Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


MICRO 5 ATOM

Factory and Field Assembled Installation Instructions

LOUVER INSTALL METHOD: **CLIP-OVER LOUVER**


- Louvers can be snapped onto the fixture either before or after it is mounted to the surface using the provided mounting clip.

COMPATIBILITY	Louver Connector
ATOM-FLAT (01)	✓
ATOM-OPTICS (02)	✓
ATOM-ENCAPSULATED (03)	✓
ATOM-LOUVER (05)	

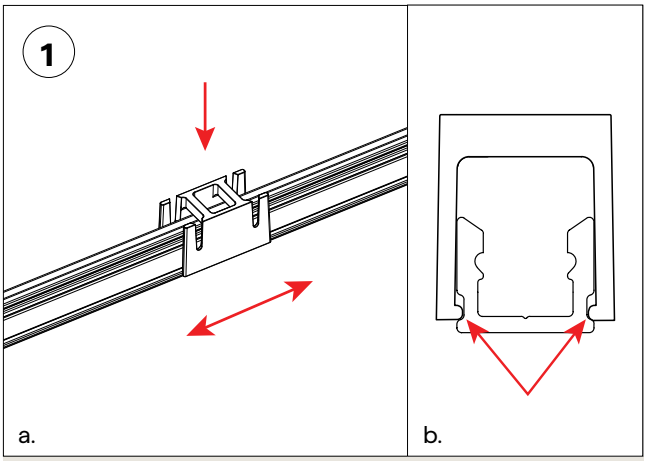


a. Place Clip-Over Louver connector onto the fixture housing in the approximate location. The connector can be moved into final position later.

b. Small runners should fit into extrusions side channels.

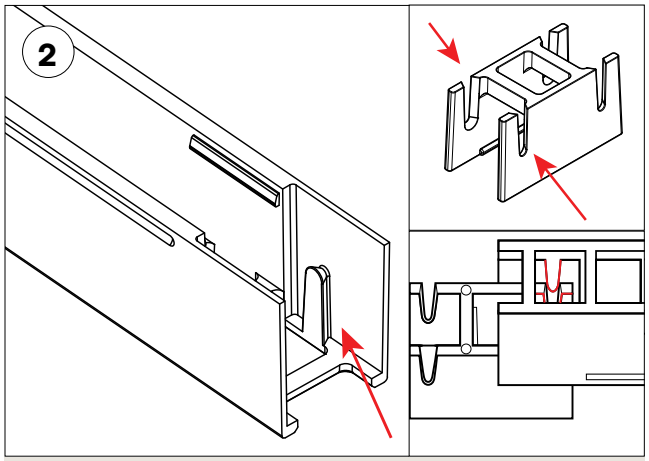


During install, align the dovetail on the Clip-Over Louver with the feature on the Clip-Over Louver Connector.

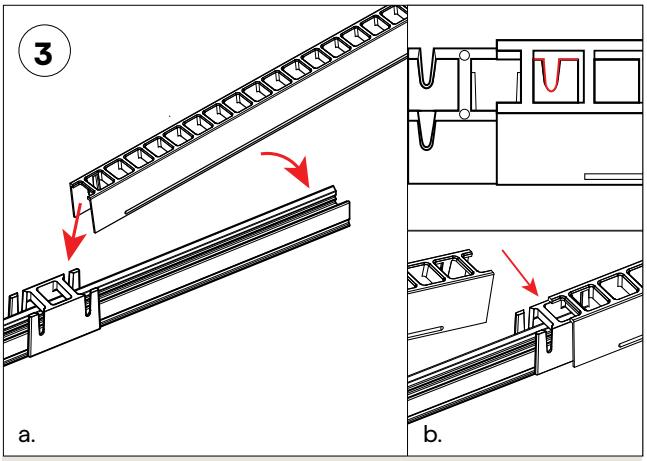

a. Place the louver's dovetail feature into the corresponding feature on the connector. Then clip the louver into place on the fixture at a slight angle

b. Snap the next louver onto the fixture and connector in the same process.

NOTE: *These plastic louvers are field-cuttable. Trimming the final segment as needed and positioning the cut end at the end of the fixture is recommended.*

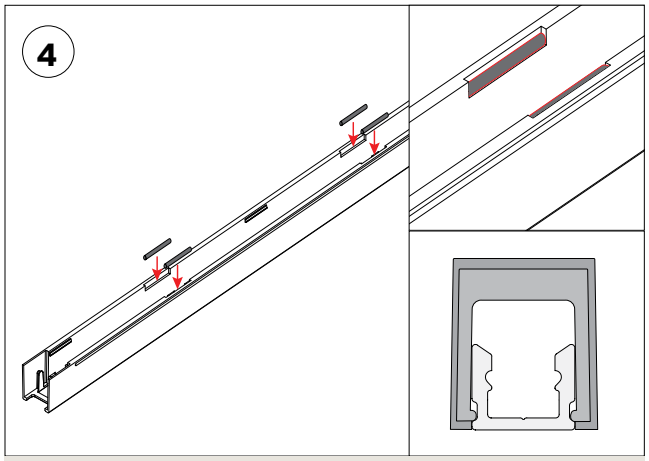

Vertical Install

- If hanging the fixture vertically used the supplied gaskets and insert between extrusion and louver as shown above before inserting into mounting clips.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


MICRO 5 ATOM

Factory and Field Assembled Installation Instructions

LOUVER INSTALL METHOD: **SCREW MOUNT**


- Louvers can be snapped onto the fixture either before or after it is mounted to the surface using the provided mounting clip.

COMPATIBILITY	SST-01
ATOM-FLAT (01)	✓
ATOM-OPTICS (02)	✓
ATOM-ENCAPSULATED (03)	✓
ATOM-LOUVER (05)	

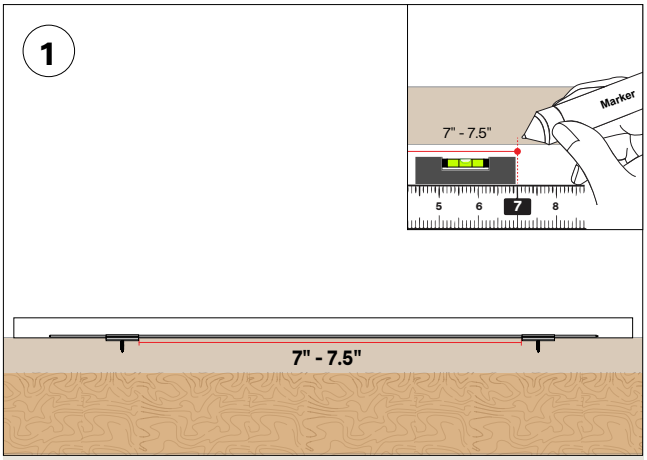


Single Louver Clip

- Determine the MICRO 5 fixture(s) location and positioning on desired surface, evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place.
- Recommended every 7” to 7.5” on single louver.

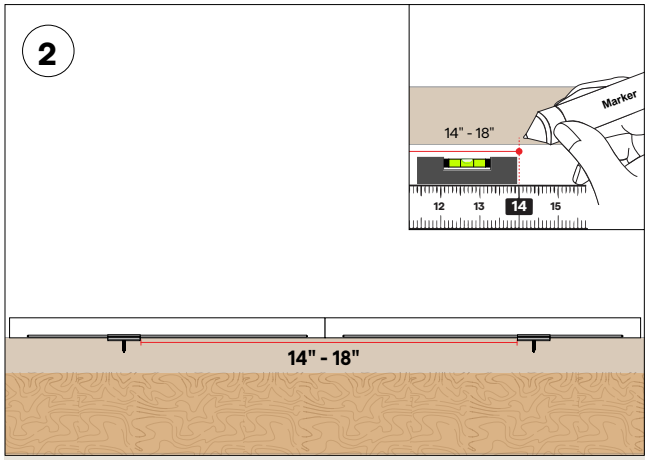


Multiple Single Louver Clip

- If installing multiple louvers recommended spacing is between 14” and 18”.

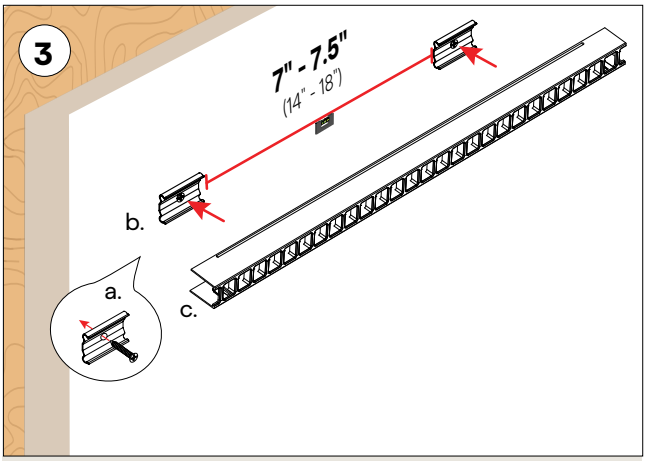

a. Secure clips using #4 flat head screw provided.
b. Ensure the Screw head is flush with the clips base.
c. Snap fixture onto clips.

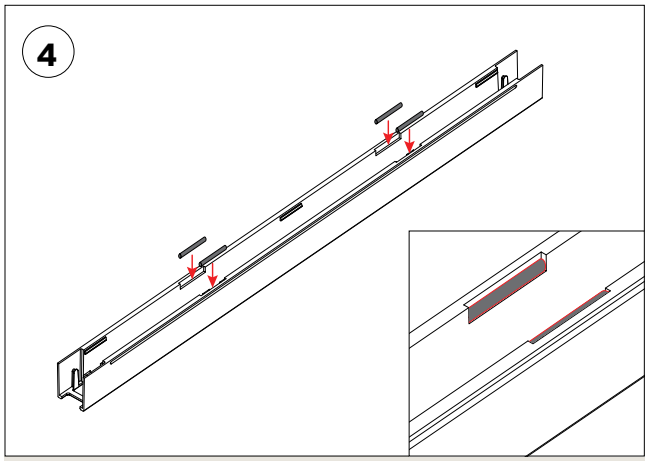

Vertical Install

- If hanging the fixture vertically used the supplied gaskets and insert between extrusion and louver as shown above before inserting into mounting clips.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 ATOM-FLAT-RGB(01)

Linear Fixtures Color Data

ATOM-01-RGB-4.0-R-DRY-FR

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.622


Y: 0.294


U: 0.470

V: 0.334

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

ATOM-01-RGB-4.0-R-DRY-DF

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.600


Y: 0.296


U: 0.448

V: 0.332

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

ATOM-01-RGB-4.0-G-DRY-FR

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.191


Y: 0.707


U: 0.069

V: 0.382

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-03-10-24

MICRO 5 ATOM-FLAT-RGB(01)

Linear Fixtures Color Data

ATOM-01-RGB-4.0-G-DRY-DF

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.201


Y: 0.673


U: 0.075

V: 0.378

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

ATOM-01-RGB-4.0-B-DRY-FR

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.130


Y: 0.092


U: 0.135

V: 0.144

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

ATOM-01-RGB-4.0-B-DRY-DF

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.138


Y: 0.096


U: 0.143

V: 0.149

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


Specification subject to change. Rev-03-10-24

MATERIAL RECYCLING

LINEAR FIXTURES/EXTRUSIONS

You may be done with your products, but chances are they still have more to give. Follow these instructions to break down and sort recyclable components. Check with local recycling collection to ensure they accept the materials listed below.

Additionally, Q-Tran offers a Takeback Program. Contact factory for information.

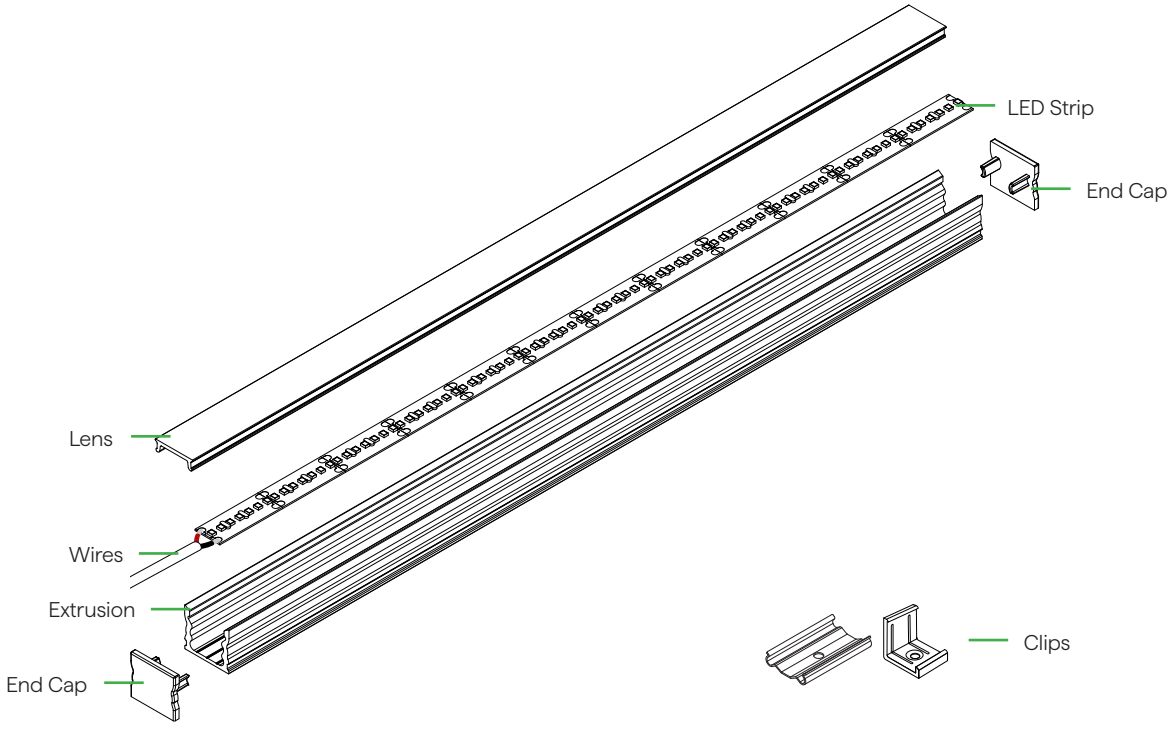

7	E	41	40
Lens Plastic End Caps Plastic Clips	LED Strip Wires	Extrusion Metal End Caps	Stainless Steel Clips

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting