
EXCELSIOR PL-1

12V GY6.35/G4 35W Halogen/4W LED Path Light



PL-1 Shown in Bronze Texture Powder Coat Finish (BZT)

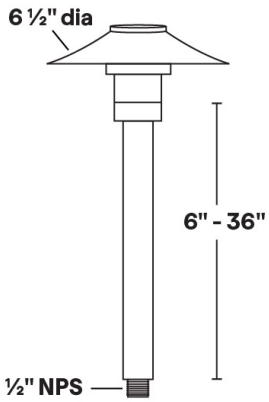

Dimensions: 6 1/2" dia. shade

- 6061 Marine Grade Aluminum, available in eight standard TGIC Free powder coat finishes
- Copper, available in two finishes.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/4 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP	5 STEM LENGTH	6 FINISH
PL-1					

Sample Part Number: **PL-1-A-F-D-12-BZT**

1 PRODUCT

PL-1

2 MATERIAL

A	Aluminum
B	Brass

3 LENS STYLE

F	Frosted
C	Clear

4 SHADE TOP

S	Standard
T	Tall
D	Dome
C	Cone

5 STEM LENGTH

0	None
6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length
24	24" Stem Length
30	30" Stem Length
36	36" Stem Length

6 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White
DB	Dark Bronze
P	Polished

DB finish has longer lead time

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-07-24-26

EXCELSIOR PL-1

12V GY6.35/G4 35W Halogen/4W LED Path Light

1 PRODUCT - DIMENSIONS



2 MATERIAL




Aluminum

Brass

4 SHADE TOP

4 Shade Top Options

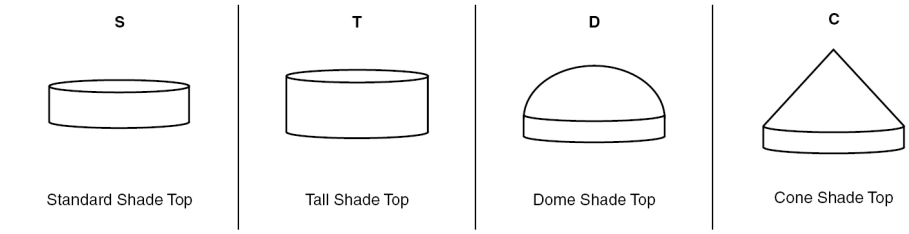

6 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Dark Bronze

Polished

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

EXCELSIOR PL-1

12V GY6.35/G4 35W Halogen/4W LED Path Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

Q-MT-45



Ground Mount

Q-MT-6



Ground Mount

Q-MT-7



Ground Mount

LAMPS

G4 Halogen or LED; GY-6.35 Bi Pin Porcelain (accepts G4 Lamps)
Maximum wattage: 35W Halogen/4W LED

G4



EMERY ALLEN

1.0W

G4



EMERY ALLEN

1.0W AMBER

G4



EMERY ALLEN

1.5W SINGLE POINT

G4



EMERY ALLEN

2.0W AMBER

G4



EMERY ALLEN

2.5W C.O.B.

G4



EMERY ALLEN

4.0W C.O.B.

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting