
EXCELSIOR PL-10a

12V GY6.35/G4 2.5W LED Path Light



PL-10a Shown in Black Powder Coat Finish (BK)

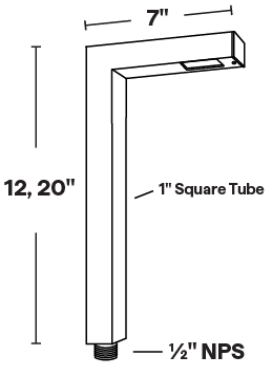

PL-10a Dimensions: 1"x 1" tube, 12"/20" H x 7" L

- Brass available in eight standard TGIC Free powder coat finishes and natural or dark bronze finishes.
- Stainless steel hardware.
- 6' of 18/2 low voltage cable supplied.
- Frosted tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Maximum Wattage: 2.5W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 STEM LENGTH	4 FINISH
PL-10a	B		

Sample Part Number: **PL-10a-B-12-NT**

1 PRODUCT

PL-10a	

2 MATERIAL

B	Brass

3 STEM LENGTH

12	12" Stem Length
20	20" Stem Length

12" and 20" Heights have a 7" horizontal arm length

4 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White
DB	Dark Bronze
NT	Natural

DB finish has a longer lead time

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-05-12-26

EXCELSIOR PL-10a

12V GY6.35/G4 2.5W LED Path Light

1 PRODUCT - DIMENSIONS



PL-10a


2 MATERIAL



Brass

4 FINISH

Eight Standard TGIC Free powder coat finishes and Two natural finish options.

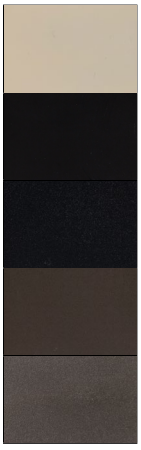

Beige

Black

Black Texture

Bronze

Bronze Texture



Black Bronze

Silver

White

Natural

Dark Bronze

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. **Rev-05-12-26**

EXCELSIOR PL-10a

12V GY6.35/G4 2.5W LED Path Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

MT-45



Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

LAMPS

G4 LED; GY 6.35 bi pin porcelain socket (accepts G4 lamps)
Maximum wattage: 2.5W LED

G4



EMERY ALLEN

1.5W

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting