
# EXCELSIOR PL-5

12V GY6.35/G4 35W Halogen/4W LED Path Light



PL-5 Shown in Bronze Texture Powder Coat Finish (BZT)

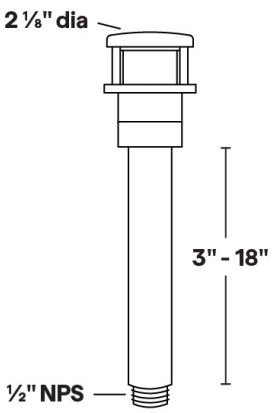


Dimensions: 2 1/2" dia. top

- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/4W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

| 1 PRODUCT | 2 MATERIAL | 3 STEM LENGTH | 4 LENS STYLE | 5 OPENING SIZE | 6 FINISH |
|---|---|---|---|---|---|
| PL-5 | A | | | | |

Sample Part Number: **PL-5-A-6-F-90-BK**

**1 PRODUCT**

| | |
|---|---|
| **PL-5** | |

**2 MATERIAL**

| | |
|---|---|
| **A** | Aluminum |

**3 STEM LENGTH**

| | |
|---|---|
| **0** | None |
| **3** | 3" |
| **6** | 6" |
| **9** | 9" |
| **12** | 12" |
| **18** | 18" |

**4 LENS STYLE**

| | |
|---|---|
| **F** | Frosted |
| **C** | Clear |

**5 OPENING SIZE**

| | |
|---|---|
| **90** | 90 Degree |
| **120** | 120 Degree |

**6 FINISH**

| | |
|---|---|
| **BG** | Beige |
| **BB** | Black Bronze |
| **BK** | Black |
| **BKT** | Black Texture |
| **BZ** | Bronze |
| **BZT** | Bronze Texture |
| **SL** | Silver |
| **WH** | White |

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-05-12-26

# EXCELSIOR PL-5

12V GY6.35/G4 35W Halogen/4W LED Path Light

## 1 PRODUCT - DIMENSIONS





## 2 MATERIAL

Aluminum

## 5 OPENING SIZE


Two Opening Options

90



90° Opening Size

120



120° Opening Size

## 6 FINISH

Eight Standard TGIC Free powder coat finishes

- Beige
- Black
- Black Texture
- Bronze
- Bronze Texture
- Black Bronze
- Silver
- White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-05-12-26

# EXCELSIOR PL-5

12V GY6.35/G4 35W Halogen/4W LED Path Light

## ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

**MT-45**



Ground Stake

**MT-2**



Adjustable Ground Stake

**MT-6**



Stainless Steel Ground Spike

**MT-7**



Stainless Steel Ground Spike

**MT-8**



Stainless Steel Ground Spike

## LAMPS

G4 Halogen or LED; GY-6.35 Bi Pin Porcelain (accepts G4 Lamps)
Maximum wattage: 35W Halogen/4W LED

**G4**



EMERY ALLEN

4.0W

**G4**



EMERY ALLEN

2.0W AMBER

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIMMING PROTOCOL | OUTDOOR |
|---|---|
| | LANDSCAPE LIGHTING |
| Phase | Q-HEX<br>Q-SET-1<br>Q-SET-2<br>Q-SET-3<br>QOMD<br>QOMS |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting