
EXCELSIOR PL-6

12V GY6.35/G4 35W Halogen/4W LED Wash Light



PL-6 Shown in Bronze Texture Powder Coat Finish (BZT)

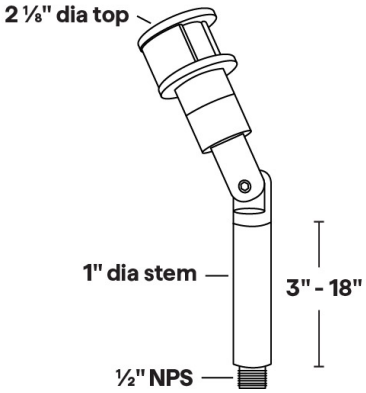

Dimensions: 2 1/8" dia. top

- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/4W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 STEM LENGTH	4 LENS STYLE	5 OPENING SIZE	6 FINISH
PL-6	A				

Sample Part Number: **PL-6-A-6-F-90-BK**

1 PRODUCT

PL-6	

2 MATERIAL

A	Aluminum

3 STEM LENGTH

0	None
3	3"
6	6"
9	9"
12	12"
18	18"

4 LENS STYLE

F	Frosted
C	Clear

5 OPENING SIZE

90	90 Degree
120	120 Degree
180	180 Degree

6 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-05-12-26

EXCELSIOR PL-6

12V GY6.35/G4 35W Halogen/4W LED Wash Light

1 PRODUCT - DIMENSIONS




2 MATERIAL

Aluminum

5 OPENING SIZE

Three Opening Options

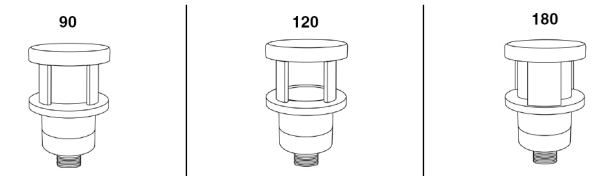

90° Opening Size

120° Opening Size

180° Opening Size

6 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-05-12-26

EXCELSIOR PL-6

12V GY6.35/G4 35W Halogen/4W LED Wash Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

MT-45



Ground Stake

MT-2



Adjustable Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

LAMPS

G4 Halogen or LED; GY-6.35 Bi Pin Porcelain (accepts G4 Lamps)
Maximum wattage: 35W Halogen/4W LED

G4



EMERY ALLEN

4.0W

G4



EMERY ALLEN

2.0W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting