
EXCELSIOR RL-1

12V MR16 35W Halogen/8W LED Pendant Light



RL-1 Shown in Bronze Texture Powder Coat Finish (BZT)

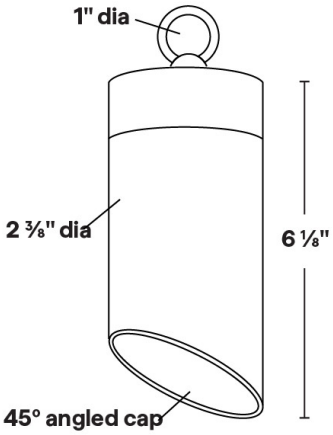

Dimensions: 2 3/8" dia. x 4 1/2"

- 1" brass loop for mounting. Hanging hook included.
- 1" regressed cap lens or 45° angled cap lens; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- SS Cable and lead wire options.
- Stainless steel hardware.
- 12" of 18 ga. Teflon wire leads"
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking. and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for pendant mounted downlighting applications. Can be utilized for pergola, tree-mounted, and other exterior installations.

1 PRODUCT	2 MATERIAL	3 CAP STYLE	4 SS CABLE	5 18/ 2 WIRE	6 FINISH
RL-1	A				

Sample Part Number: **RL-1-A-S-0-0-BK**

1 PRODUCT

RL-1

2 MATERIAL

A	Aluminum

3 CAP STYLE

S	Straight
A	45 Degree Angle

4 SS CABLE

0	No SS Cable
5	5' SS Cable
10	10' SS Cable
15	15' SS Cable
20	20' SS Cable
25	25' SS Cable
30	30' SS Cable

5 18/2 WIRE

0	Standard 12" Wire
5	Extra 5' Wire
10	Extra 10' Wire
15	Extra 15' Wire
20	Extra 20' Wire
25	Extra 25' Wire
30	Extra 30' Wire

12" wire is standard. Length selected will be added to the standard 12" wire length.

6 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-28-26

EXCELSIOR RL-1

12V MR16 35W Halogen/8W LED Pendant Light

1 PRODUCT - DIMENSIONS

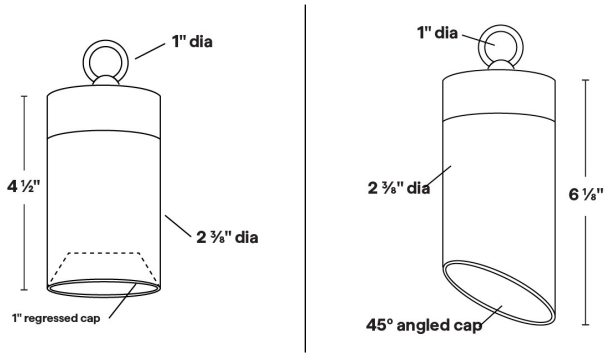

2 MATERIAL

Aluminum

6 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-09-28-26

EXCELSIOR RL-1

12V MR16 35W Halogen/8W LED Pendant Light

ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16	MR16
	
EMERY ALLEN	EMERY ALLEN
1.0W, 3.0W, 5.0W, 7.0W, 8.0W	3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved