

MICRO 5 POP-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed





- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Ideal for recessed installations that call for low-profile light in small areas
- Red, Green, and Blue LED allows for color changing applications
- Consult factory for field assembly options

Specify either factory assembled fixtures or field assembled extrusions and LEDs.

A LEDs will be installed into a complete fixture. Ideal for single fixtures. Avoids installers needing to handle the delicate 5mm LED.

OR

B Extrusions and LEDs will be shipped not installed. Ideal for long runs or light with no interruptions in LED up to Class 2 limitations. Due to the delicate nature of the 5mm LED, care must be taken in the installation process

A. Factory Assembled Option

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5
PRODUCT	WATTS/ FT	CCT	RATED	LENS
POP-01-RGB	4.0	RGB		

ADDITIONAL INFORMATION REQUIRED TO ORDER

A6	A7	A8	A9	A10	A11	A12	A13	A14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **POP-01-RGB-4.0-RGB-DRY-DF-S1A-BW-CLS-WH-CL2-MG-ST-48"-E**

A1 PRODUCT

POP-01-RGB

See following pages for compatible power supplies.

A2 WATTS/FT

4.0 4.0W/ft

A3 CCT

RGB

A4 RATED

DRY IP20
DMP IP54

A5 LENS

DF Diffused
PR Polar

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

A6 WIRE INPUT/ OUTPUT

SINGLE (Input only)
S1A End Feed
S1B End Feed
S2A Bottom Feed
S2B Bottom Feed

For continuous mounting, consider bottom feed.

PASS THROUGH (Input/output)
P1A End Feed
P1B End Feed
P2A Bottom Feed
P2B Bottom Feed

For continuous mounting, consider bottom feed.

A7 CONNECTOR/ WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A8 CONNECTOR/ WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 WIRE COLOR

WH White
BK Black

A10 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

A11 MOUNTING

MG Magnet
832 832 Silicone
PL Plastic Clip

A12 FINISH

ST Satin
BK Black
BZ Bronze
WH White
CU Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

A13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

A14 EXACT/ OPTIMAL

E Exact specified length
O Optimal illumination

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-10-08-26

MICRO 5 POP-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

B. Field Assembled Option

EXTRUSION ORDERING

B1 PRODUCT	B2 FINISH	B3 MOUNTING	B4 LENS	B5 WIRE INPUT/ OUTPUT	B6 EXTRUSION LENGTH (IN)
POP-01				NI	

LED STRIP ORDERING

B7 V/ WATTS	B8 RATED	B9 CCT - LUMENS/ CRI	B10 CONNECTOR/ WIRE IN	B11 CONNECTOR/ WIRE OUT	B12 WIRE COLOR	B13 WIRE TYPE	B14 ILLUMINATED LENGTH
RGB24-5MM/4.0		RGB	BW	CLS		CL2	

EXTRUSION ORDERING

Sample Part Number: **POP-01-ST-MG-DF-NI-98.43"**

B1 PRODUCT

POP-01

B2 FINISH

ST Satin
BK Black
BZ Bronze
WH White
CU Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

B3 MOUNTING

MG Magnet
832 832 Silicone
PL Plastic Clip

B4 LENS

DF Diffused
PR Polar

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

B5 WIRE INPUT/OUTPUT

NI Not Installed

B6 EXTRUSION LENGTH (IN)

1" increments from 1" - 98.43"
Extrusion Tolerance +0 -1/8".

LED STRIP ORDERING

Sample Part Number: **RGB24-5MM/4.0-DRY-RGB-BW-CLS-WH-CL2-100"**

B7 V/WATTS

RGB24-5MM/4.0

Wattage: 4.0W/ft
Voltage: 24VDC
See following pages for compatible power supplies.

B8 RATED

DRY IP20
DMP IP54

B9 CCT - LUMENS/CRI

RGB

B10 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")

B11 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

B12 WIRE COLOR

WH White
BK Black

B13 WIRE TYPE

CL2 Class 2

B14 ILLUMINATED LENGTH

2"-288" in 2" increments

Order LED length needed for each run. Lengths cannot exceed 24' (Class 2). All lengths will have a 2' soldered lead wire attached. This product is not to be field-soldered.

REQUIRED ACCESSORY

UNIV-ROLLER




Roller tool used to lay MICRO 5 LED strips into extrusion housing

Included and required for all MICRO 5 field assembled options

To order additional, use UNIV-ROLLER


END CAPS

One pair of end caps is provided with each length of extrusion ordered.




Feed

To order separately, use POP-EC-NF-A



Feed

To order separately, use POP-EC-NF-B



No Feed

To order separately, use POP-EC-NF


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-08-26


MICRO 5 POP-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed


A1 / B1 PRODUCT - DIMENSIONS




Profile



Profile with magnet clip



Profile with magnet clip and magnet mount accessory



Profile with plastic mounting clip

A2 / B9 DELIVERED LUMENS

[Calculated L70 = 52000 hrs]
Tested with POP-01-RGB-4.0-RGB-DRY

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
PR	25	627	72	522	19	469	109
DF	23	627	66	523	18	470	98

A5 / B4 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens in green

TEMPERATURE RATINGS

		4.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	110°F


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP-FLAT (01) RGB


24VDC Linear Fixtures - Surface & Recessed

A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)




End Feed



End Feed




Bottom Feed




Bottom Feed


ASYMMETRIC ONLY PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed



End Feed




Bottom Feed




Bottom Feed


CONFIGURATION OPTIONS



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed

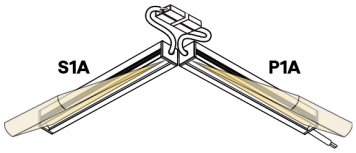


Connection by others

Non-Continuous Corner Feed

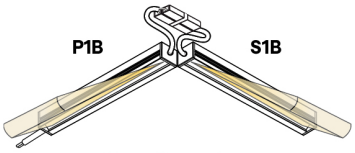

Connection by others


Non-Continuous Corner Feed



Continuous Bottom Feed

A7 / A8 / B10 / B11 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out




Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed

A9 / B12 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-08-26

MICRO 5 POP-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

A11 / B3 MOUNTING

MG




Magnet Clip

One MG provided per foot

To order separately use MG-05

PL




Plastic Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use PLC-16

Each clip comes with a #6x1/4" and #6x1/2" Flat Head SS


832



832 Silicone

Sold separately

MMA-05



Magnet Mount Accessory for MG-05

Sold separately, to order use MMA-05

Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot

Required when mounting to a non-magnetic surface

A12 / B2 FINISH


- Satin
- Black
- Bronze
- White

Custom finishes require a longer lead time, consult factory

A14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

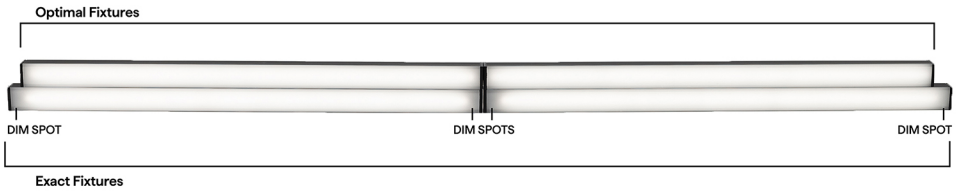


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP-FLAT (01) RGB



24VDC Linear Fixtures - Surface & Recessed

RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B 		P1A/B & P2A/B 	
	End Feed	Bottom Feed	End Feed	Bottom Feed
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle

DIMMING PROTOCOL	INDOOR
	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP

Linear Fixture Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Warranty only valid with QTL power supplies
- Recessed in millwork
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

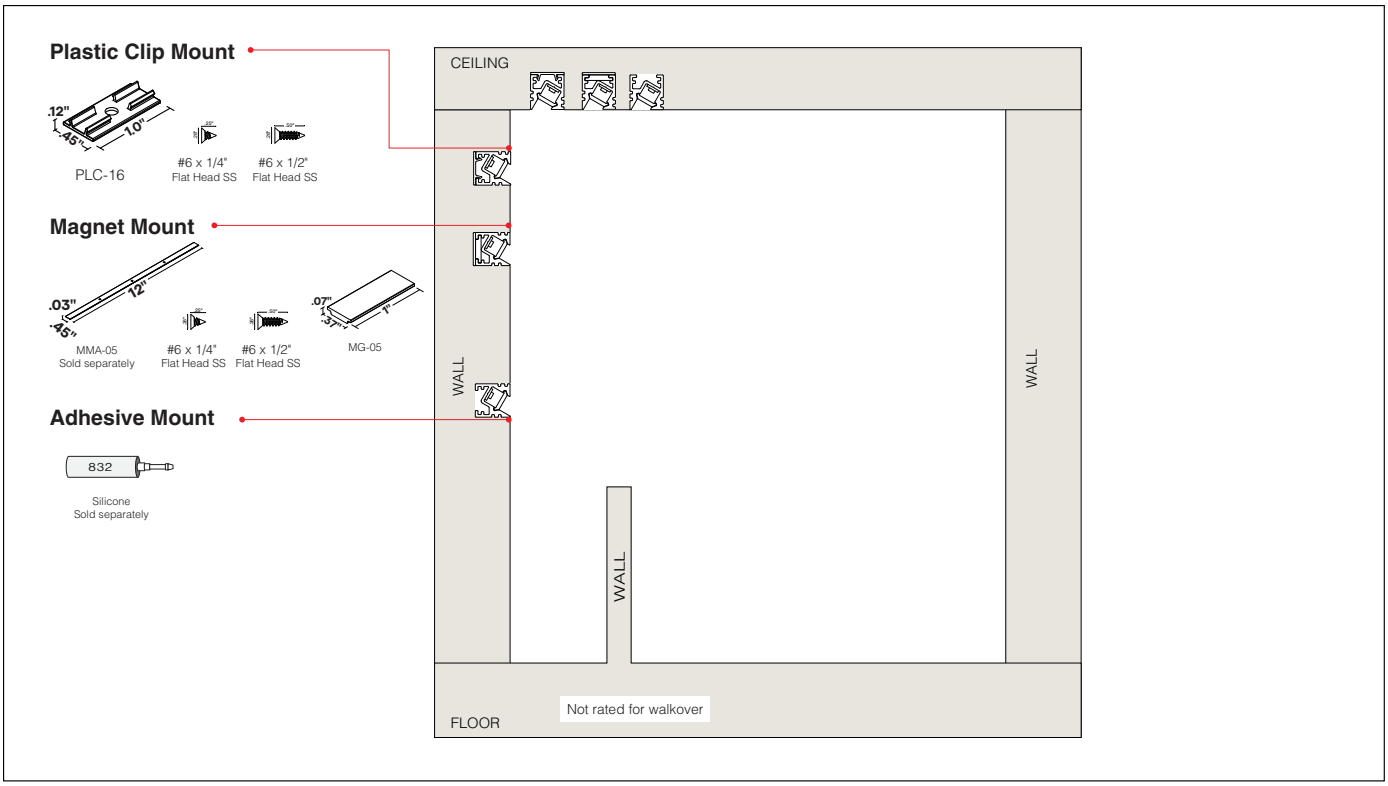

Preparation

- Components & Hardware (page 2)
- Cutting & Configuration Options (page 3)
- Surface Preparation & Assembly (page 4-5)


Recessed Mounting Method

- Silicone Mount: Millwork (page 6)
- Magnet Mount: Millwork (page 7)
- Plastic Clip Mount: Millwork (page 8)


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP

Linear Fixture Installation Instructions



POP-FLAT (01)




POP-ENCAPSULATED (03)

COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size

PLASTIC CLIP




Included	
.25" 30°	Flat Head Screw #6x1/4"
.50" 30°	Flat Head Screw #6x1/2"

PLC-16

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'

MAGNET CLIP



MG-05

- One magnet clip per foot

REQUIRED ACCESSORY




Included
Included and required for all MICRO 5 field assembled options

UNI-ROLLER

- Roller tool used to lay MICRO 5 LED strip into extrusion housing. To order additional use UNI-ROLLER

ACCESSORIES SOLD SEPARATELY

MAGNET MOUNT ACCESSORY; sold individually




Included	
.25" 30°	Flat Head Screw #6x1/4"
.50" 30°	Flat Head Screw #6x1/2"

MMA-05

- MMA-05 comes in 12" pieces
- 4 provided for 4' or greater. 2 provided for 4' or less


ADHESIVE SOLD SEPARATRLY

VHB TAPE; sold in 15" increments



TAPE-VHB-IP20

SILICONE



DOWSIL 832


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP


Linear Fixture Installation Instructions

CUTTING EXTRUSIONS FOR IN-FIELD ASSEMBLY INSTALLATION

QTL strongly recommends cutting the extrusion and lens together to achieve a clean cut.

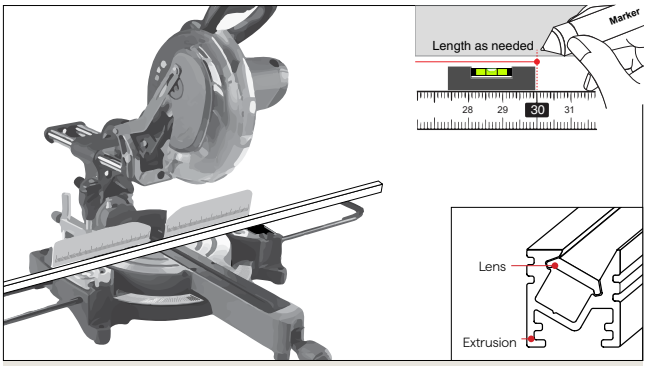

OR

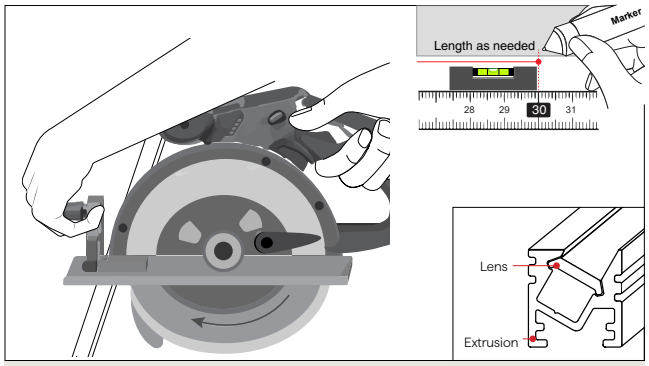


To achieve corners or angles, measure the LED extrusion to desired length and cut with a miter saw.

For straight runs, measure LED extrusion to desired length and cut it with a circular saw.

NOTE: Using the proper blade for aluminum, cut to the desired length. Recommend using a 10 in.x 80 tooth medium aluminum saw blade.

CONFIGURATION OPTIONS

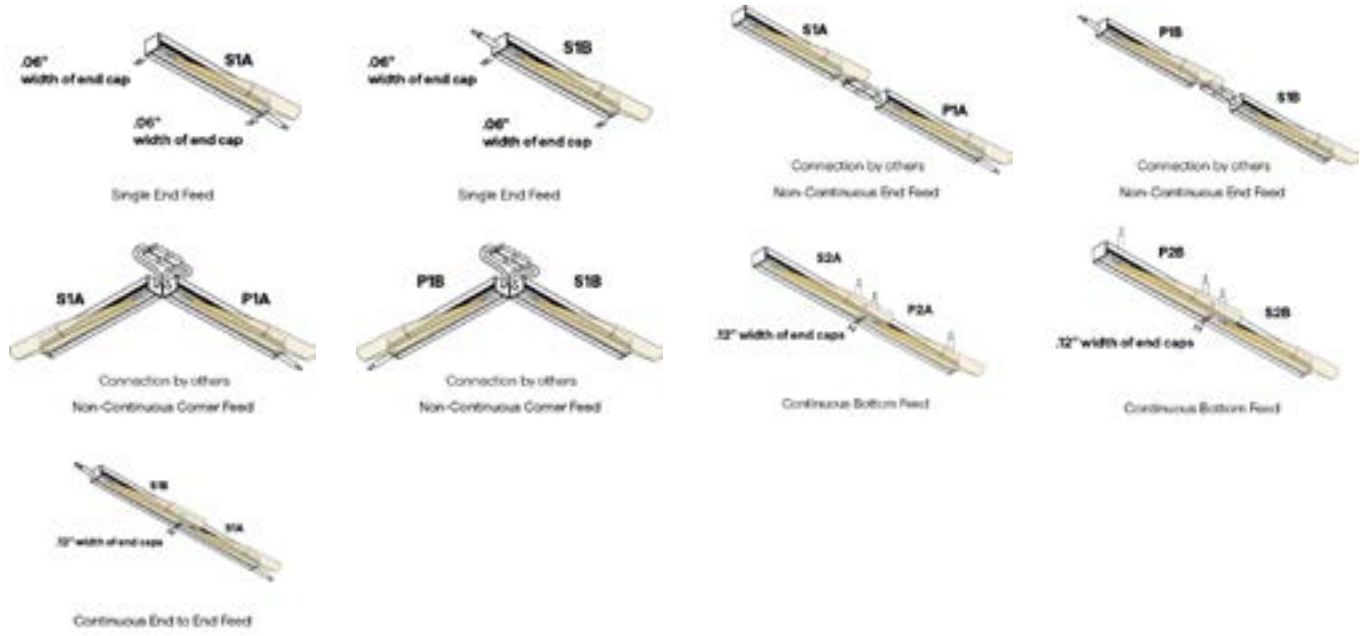

Review wire method to ensure clean installation prior to mounting extrusion.

NOTE: Additional wire methods include:
S1A, S1B, S2A, S2B: Connector/Wire Input only
P1A, P1B, P2A, P2B: Connector/Wire Input and Output


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP


Linear Fixture Installation Instructions

LED INSERTION FOR IN-FIELD ASSEMBLY INSTALLATION


STRIP IN EXTRUSION

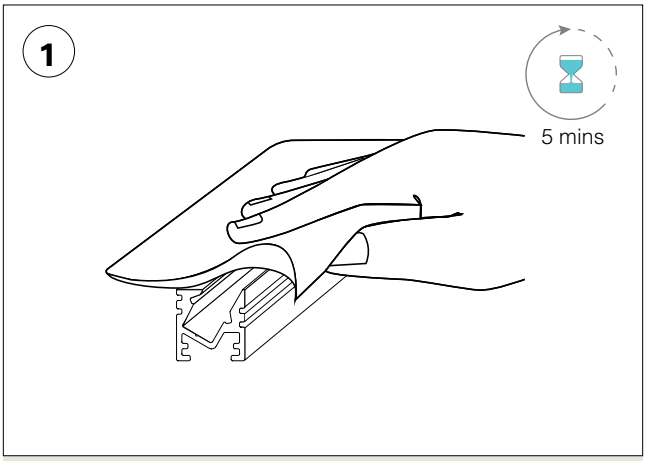


- Using a 50/50 alcohol mix throughly clean, the surface of the extrusion and the multi-tray surface. Allow time to dry (about 5 minutes).

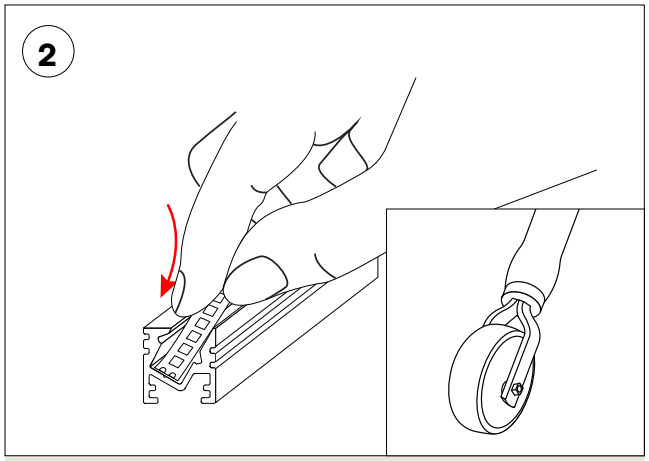

- Gently place LED in extrusion/tray. Apply firm pressure to fully adhere to the extrusion. This reduces the possibility that dust and debris will contaminate the adhesive.
- Use the UNI-ROLLER tool to place MICRO 5 LED strip into extrusion housing. If needed, you may order additional UNI-ROLLER tools.

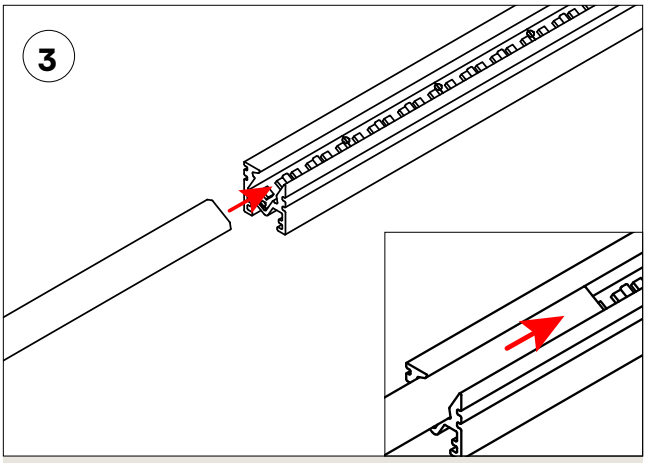

- Starting from one end of the extrusion, slide the lens into the grooved lip of the extrusion until secured in place.

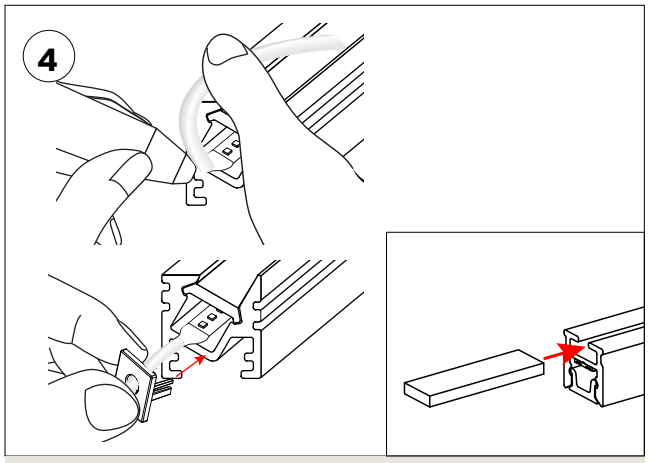

- If installing with the MAGNET MILLWORK mount, install the clips prior to gluing the endcaps.
- Add glue inside the end cap and glue around edges to secure end cap in place. Do not allow glue to come in contact with LED.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


MICRO 5 POP

Linear Fixture Installation Instructions

SURFACE MOUNTING METHOD

SURFACE PREPARATION


1

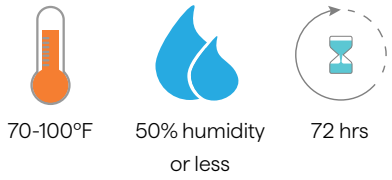

Temperature and environmental concerns:

- Ideal application environment is 70-100°F in 50% humidity or less.
- Minimum application temperature: 50°F
- This temperature and humidity should be maintained for 72 hours after application for maximum bond strength.


2

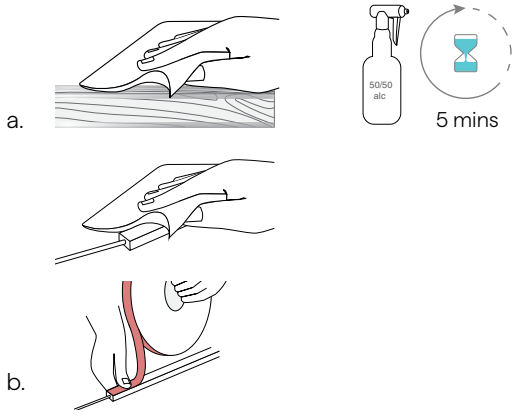

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the fixture and the surface area where fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

3

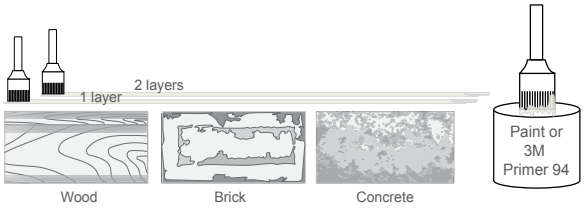

For porous materials (Wood, Brick, Concrete etc.) apply two layers of paint or primer to the surface. This will help create a better bonding surface for these materials. These can be purchased from a local hardware store.

MATERIALS	SUGGESTED EPOXIES
Concrete, Stone, Cinderblock, Metal, and Brick	Loctite Metal and Concrete Two-Part Epoxy
ABS, Fiberglass, Plastic, and PVC	Loctite Plastic Two-Part Epoxy
Tile, Wood, Ceramic, Glass, or Metal	Loctite Clear Two-Part Epoxy
All Purpose	Strong Stik


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP

Linear Fixture Installation Instructions


RECESSED MOUNTING METHOD: **SILICONE MOUNT MILLWORK**

- Apply silicone in well ventilated area.

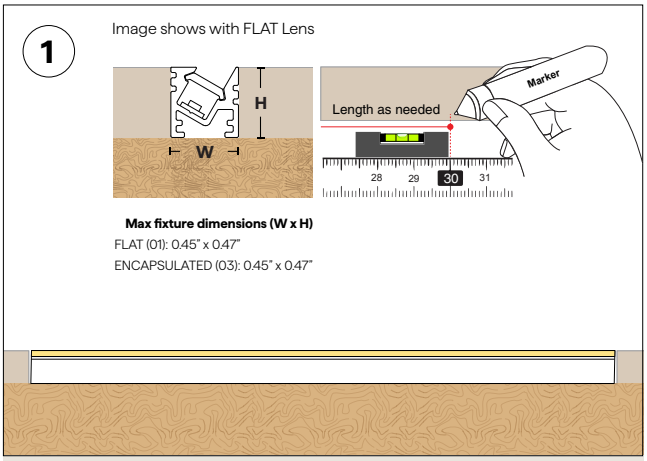


Determine the POP fixture(s) location and positioning on desired surface. Make any necessary reference markings.

NOTE: Depth of the channel in the millwork is dependent on overall height. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

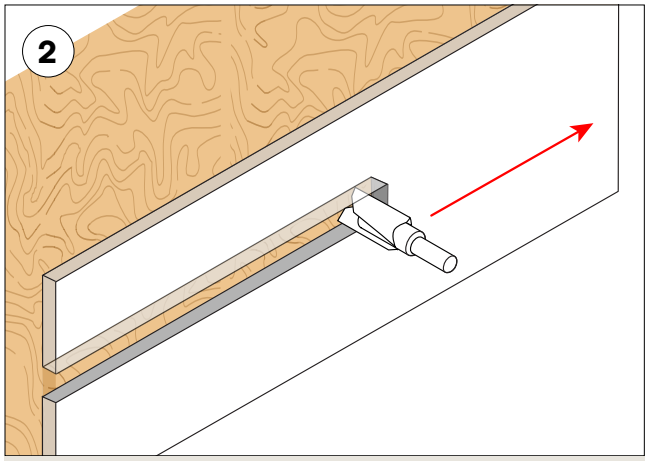


Route the material using a 15/32" or 1/2" router bit. Route or drill out any desired wireways.

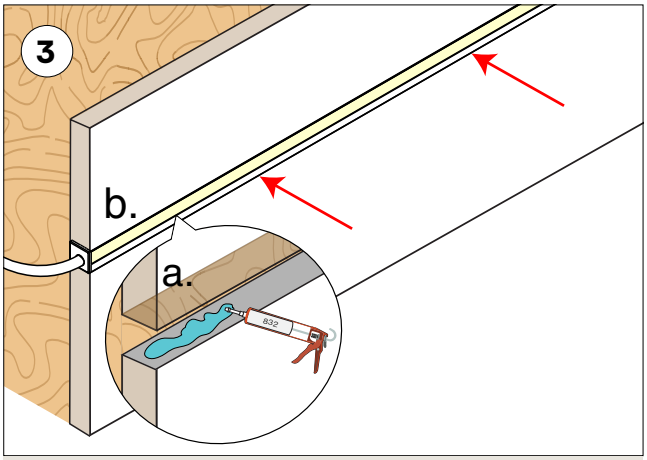

a. Apply silicone to all the sides walls and bottom surface of the millwork

b. Place the fixture into the millwork. Wait until the silicone completely cures.

NOTE: Cure time is dependent on the type of silicone adhesive used. Refer to silicone product manufacturer for accurate drying time.

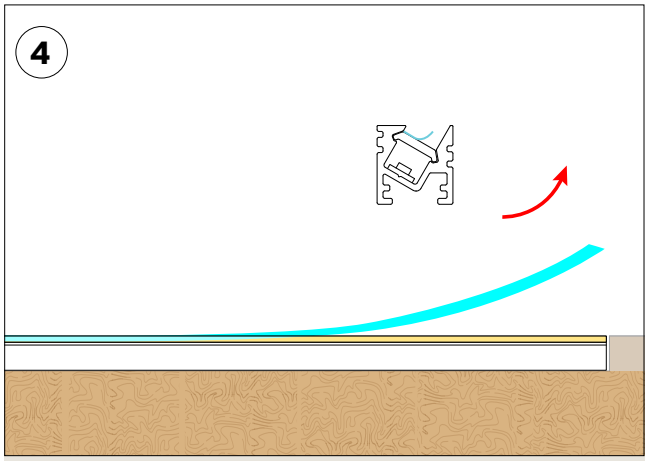


Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


RECESSED MOUNTING METHOD: **MAGNET MOUNT MILLWORK**

- One magnet clip per foot.
- MMA-05 comes in 12" pieces; 4 provided for 4' or greater. 2 provided for 4' or less.
- MMA not required if surface is magnetic
- For NI installation, clips must be slide into the fixture before end caps are glued to the ends of the fixtures.

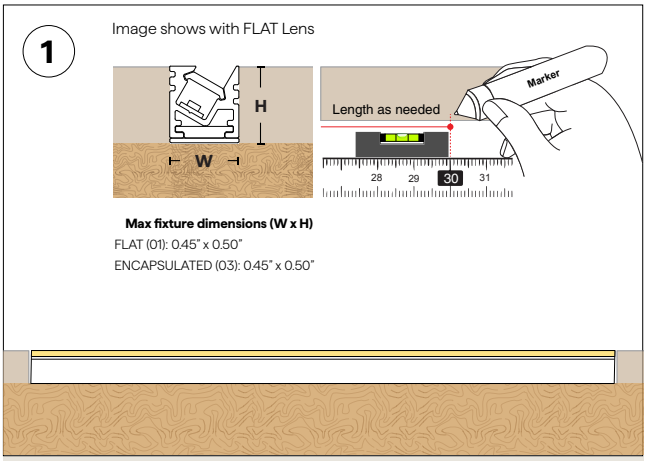


Determine the POP fixture(s) location and positioning on desired surface. Make any necessary reference markings.

NOTE: Depth of the channel in the millwork is dependent on overall height. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

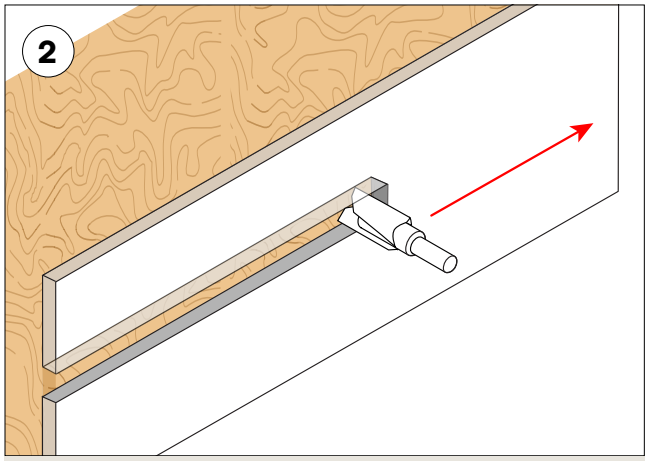


Route the material using a 15/32" or 1/2" router bit. Route or drill out any desired wireways.

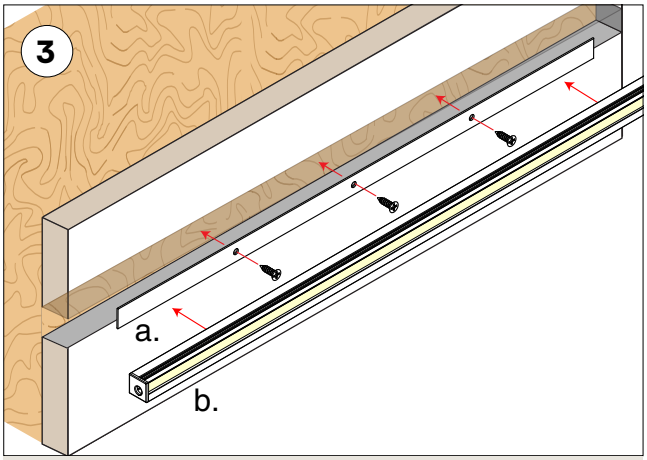

a. Mount the magnet mount accessory bracket into the routed slot. Ensure screw head is flush with magnet mount bracket.

b. Place the assembled fixture onto the magnet mount bracket Magnets come pre-installed in POP extrusion.

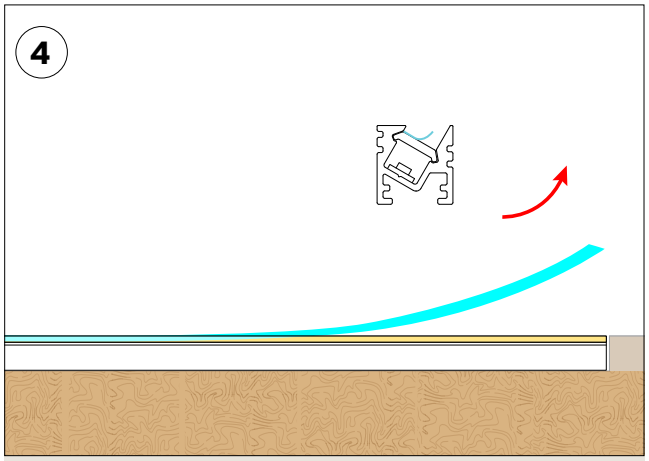


Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


RECESSED MOUNTING METHOD: **PLASTIC CLIP MOUNT MILLWORK**

- 4 provided for 4' or greater. 2 provided for 4' or less.

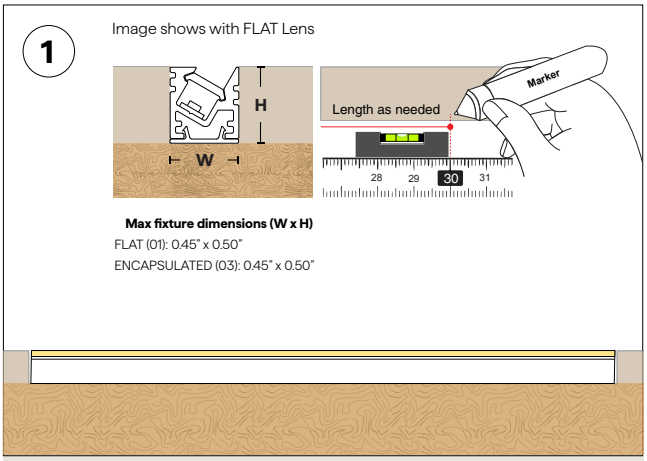


Determine the POP fixture(s) location and positioning on desired surface. Make any necessary reference markings.

NOTE: Depth of the channel in the millwork is dependent on overall height. Check spec sheet dimensions for the height and width of the specific fixture and mounting you are installing.

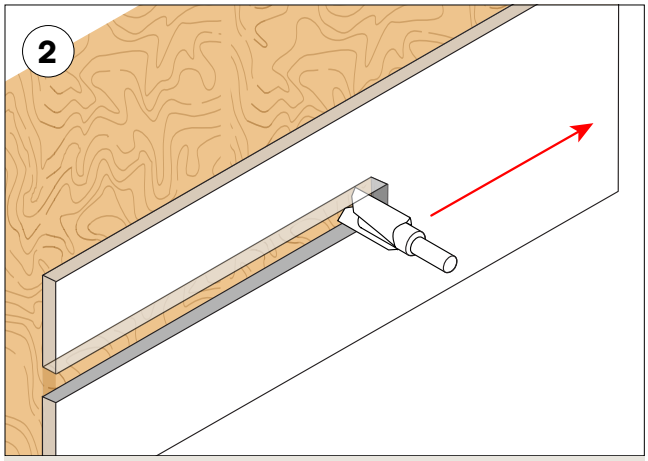


Route the material using a 15/32" or 1/2" router bit. Route or drill out any desired wireways.

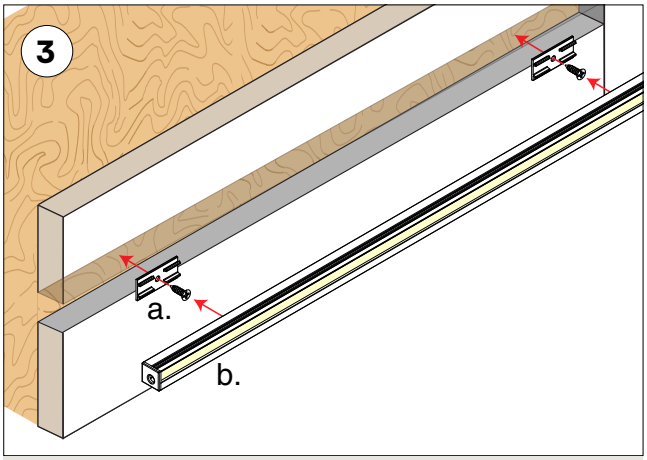

a. Secure clips using the #6 flat head hardware provided.

b. Place POP extrusion into routed slotted.

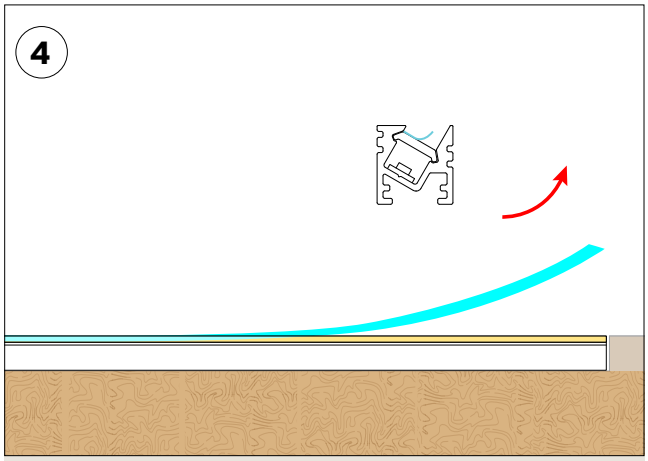

Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MICRO 5 POP-FLAT-RGB(01)

Linear Fixtures Color Data

POP-01-RGB-4.0-RD-DRY-DF

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.635


Y: 0.297


U: 0.479

V: 0.337

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

POP-01-RGB-4.0-RD-DRY-PR

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.639


Y: 0.298


U: 0.482

V: 0.337

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

POP-01-RGB-4.0-GR-DRY-DF

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.190


Y: 0.714


U: 0.068

V: 0.383

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-08-24

MICRO 5 POP-FLAT-RGB(01)

Linear Fixtures Color Data

POP-01-RGB-4.0-GR-DRY-PR

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.187


Y: 0.723


U: 0.066

V: 0.384

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

POP-01-RGB-4.0-BL-DRY-DF

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.130


Y: 0.091


U: 0.136

V: 0.142

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

POP-01-RGB-4.0-BL-DRY-PR

0 K

CRI: 0.0

CRI R9: 0.0

TM30 Rf: 0.0

TM30 Rg: 0.0

CQS: 0.0


X: 0.129


Y: 0.089


U: 0.135

V: 0.140

Δuv: n/a







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-08-24