
EXCELSIOR UL-5

12V MR16 35W Halogen/8W LED Up Light



UL-5 Shown in Bronze Texture Powder Coat Finish (BZT)

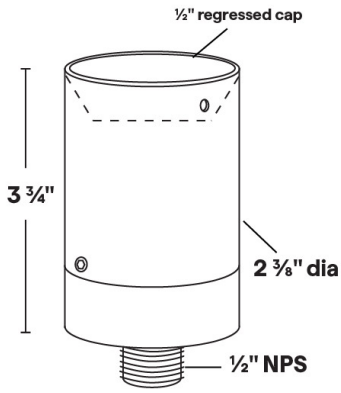

Dimensions: 2 3/8" dia. x 3 3/4"

- 1/2" regressed lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed uplighting applications. Can be utilized for ground mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
UL-5	A	

Sample Part Number: **UL-5-A-BK**

1 PRODUCT

UL-5

2 MATERIAL

A	Aluminum

3 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-09-28-26

EXCELSIOR UL-5

12V MR16 35W Halogen/8W LED Up Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

ACCESSORIES - LENS

Holds up to three accessories

SP



Spread Lens

To order separately use AY-1-MR16-1


LI



Linear Lens

To order separately use AY-1-MR16-2

SO



Softening Lens

To order separately use AY-1-MR16-3

LV



Louver Lens

To order separately use AY-1-MR16-4

WI



Wire Holder

To order separately use AY-1-MR16-5

FR



Frosted Lens

To order separately use AY-1-MR16-6

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-28-26

EXCELSIOR UL-5

12V MR16 35W Halogen/8W LED Up Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

Q-MT-45



Ground Mount

Q-MT-6



Ground Mount

Q-MT-7



Ground Mount

LAMPS

MR16 Halogen or LED; GU5.3 Bi-Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W, 7.0W, 8.0W

MR16



EMERY ALLEN

3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved