

EXCELSIOR WA-12

12V MR16 35W Halogen/8W LED Dual Wall Mount

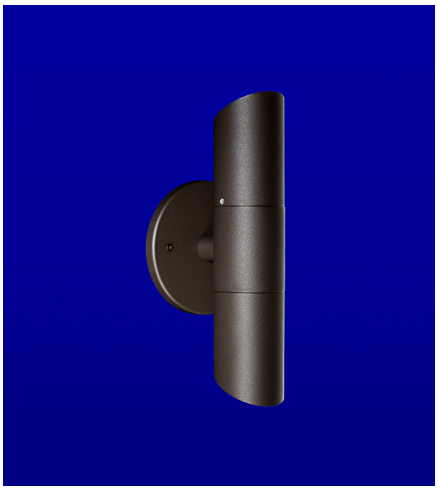

WA-12 Shown in Bronze Texture Powder Coat Finish (BZT)

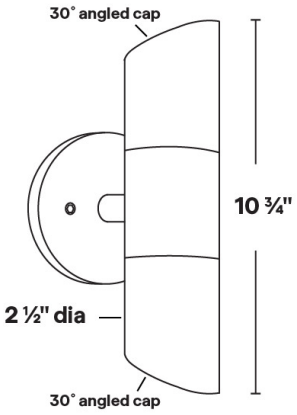

Dimensions: 2 1/2" dia. x 10 3/4"

- Two 30° angled lens caps; holds up to three accessories.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen(x2)/8 watt LED(x2)
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 FINISH
WA-12	A		

Sample Part Number: **WA-12-A-1-BK**

1 PRODUCT

WA-12

2 MATERIAL

A	Aluminum

3 MOUNTING PLATE

1	Q-MT-25
2	Q-MT-26
3	Q-MT-27

4 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-28-26

EXCELSIOR WA-12

12V MR16 35W Halogen/8W LED Dual Wall Mount

1 PRODUCT - DIMENSIONS

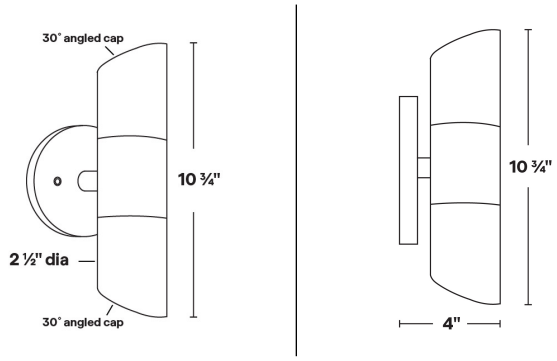

2 MATERIAL



Aluminum

3 MOUNTING PLATE

Three mounting plate options

1



4/0 Round
Mounting Plate

Q-MT-25

2



4/0 Square
Mounting Plate

Q-MT-26

3



3/0 Round
Mounting Plate

Q-MT-27

4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-28-26

EXCELSIOR WA-12

12V MR16 35W Halogen/8W LED Dual Wall Mount

ACCESSORIES - LENS

Holds up to three accessories

SP



Spread Lens

To order separately use AY-1-MR16-1


LI



Linear Lens

To order separately use AY-1-MR16-2

SO



Softening Lens

To order separately use AY-1-MR16-3

LV



Louver Lens

To order separately use AY-1-MR16-4

WI



Wire Holder

To order separately use AY-1-MR16-5

FR



Frosted Lens

To order separately use AY-1-MR16-6

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen(x2)/8W LED(x2)

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W, 7.0W, 8.0W

MR16



EMERY ALLEN

3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting