

NL-LARGE

L BRACKET - ALUMINUM EXTRUSION

RoHS COMPLIANT





- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts a large family of fixtures, LED light engines, and SHIELD
- Paintable finish
- Intended for indoor use only
- Screw mounting track for field installation of fixtures
- Inline bracket slot for seamless run connections
- Durable anodized aluminum

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NL-LARGE		

Sample Part Number: **NL-LARGE-ST-48"**

1 PRODUCT

NL-LARGE


2 FINISH

ST	Satin
BK	Black


3 LENGTH (IN)

1" increments from 2" - 98.43"
Tolerance +0.0"/-0.5"
Light engine ordered separately


1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES




Profile




Profile with: OPTI-02 FT lens




Profile with: VEVE-01



Profile with: TORQ-01



Profile with: VERS-09



Profile with: ARKA-01

Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void | Corner/surface mount

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-03-12-24

NL-LARGE






L BRACKET - ALUMINUM EXTRUSION

2 FINISH

Satin

Black

COMPATIBILITY CHART

	 ARKA	 TELA	 VEVE	 OPTI	 VERS	 TORQ	 BOXA	 KURV	 ZALA
Lens Notes	Works with: ARKA-01	Works with: TELA-01	Works with: VEVE-01, VEVE-03	Works with: 40D lens, 60D lens, 70D lens, 90D lens, 110D lens, 155D lens, ASYM lens, FT Lens	Works with: VERS-01, VERS-02, VERS-03, VERS-05, VERS-06, VERS-07, VERS-08, VERS-09	Works with: TORQ-01, TORQ-03			
SST-01 Stainless Steel Clip			✓	✓		✓			
SST-03 Stainless Steel Clip	✓	✓							
CC-01 Concealed Clip					✓				
WSC White Snug Clip							✓	✓	✓
VHB	✓	✓	✓			✓	✓	✓	✓

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


NL-LARGE

L BRACKET - ALUMINUM EXTRUSION

PHOTOMETRIC PERFORMANCE

Order separately | Tested with SW24/5.0 at 3000K

116.2°






BOXA

LENS	LM/FT	CCT
ENC/TL	218	3000K

118.6°






KURV

LENS	LM/FT	CCT
ENC/TL	232	3000K

102.8°






TORQ

LENS	LM/FT	CCT
DF	226	3000K

111.1°






VERS

LENS	LM/FT	CCT
DF	302	3000K

33.6°






VERS

LENS	LM/FT	CCT
ASYM	307	3000K

112.1°






VEVE

LENS	LM/FT	CCT
DF	278	3000K

117.8°






ZALA

LENS	LM/FT	CCT
ENC/TL	205	3000K

59.4°






OPTI

LENS	LM/FT	CCT
FT	269	3000K

JOINER/CONNECTORS



Inline Bracket

1 per length included


6/32" stainless steel, flat tip set screws, 1/8" long

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

JLU BRACKET

Installation Instructions

RoHS COMPLIANT

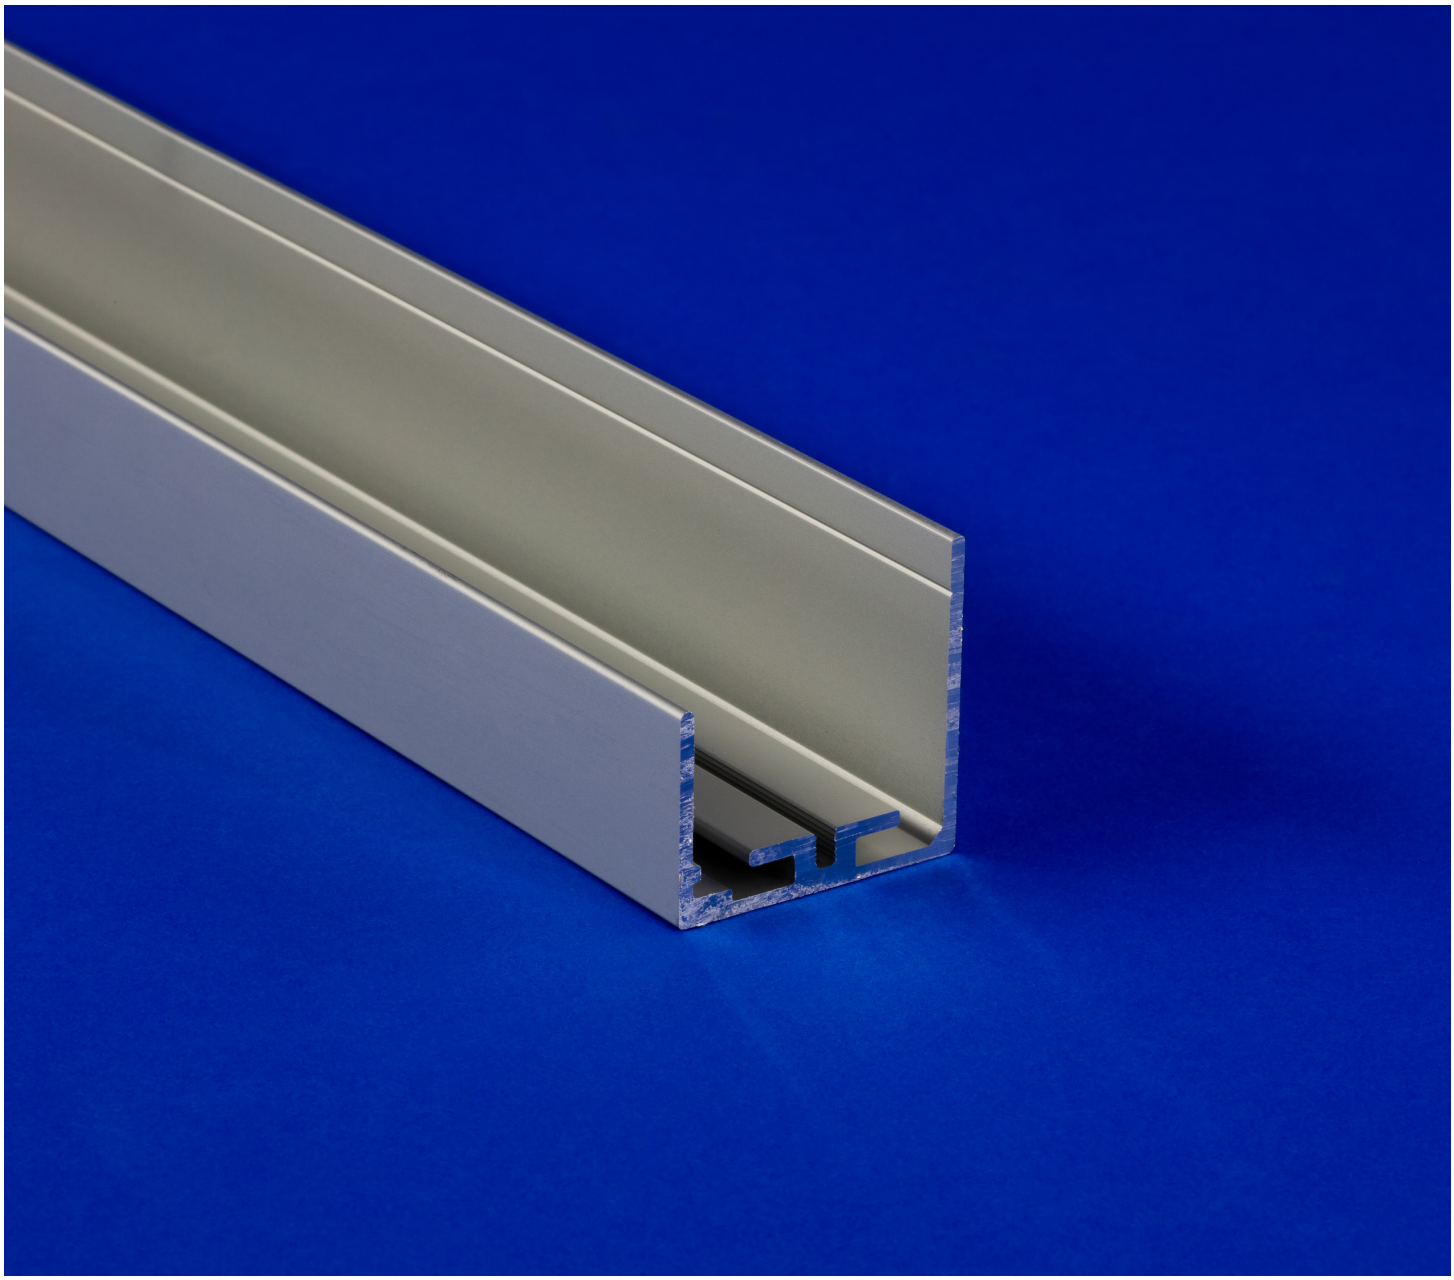



NJ-GRAZER



NJ-LARGE



NJ-MICRO



NJ-STANDARD



NL-LARGE



NL-MICRO



NU-GRAZER




NU-LARGE

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


Specification subject to change. Rev-02-29-24

JLU BRACKET


Installation Instructions




NJ-GRAZER




NJ-LARGE




NJ-MICRO




NJ-STANDARD




NL-LARGE



NL-MICRO






NU-GRAZER



NU-LARGE

COMPONENTS & HARDWARE

HARDWARE	
SS FLAT HEAD PHILLIPS #6x3/4”	U-BRACKET WALL MOUNTING CLIP
	

ACCESSORIES
INLINE CONNECTOR
 Included:  SS SET SCREWS #6x32x1/8"


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JLU BRACKET


Installation Instructions

WALL MOUNTING - J & L - WITH CLIPS


- 2 clips provided for 4' or less; 4 clips provided for greater than 4'
- If using multiple lengths, see **pg 5**

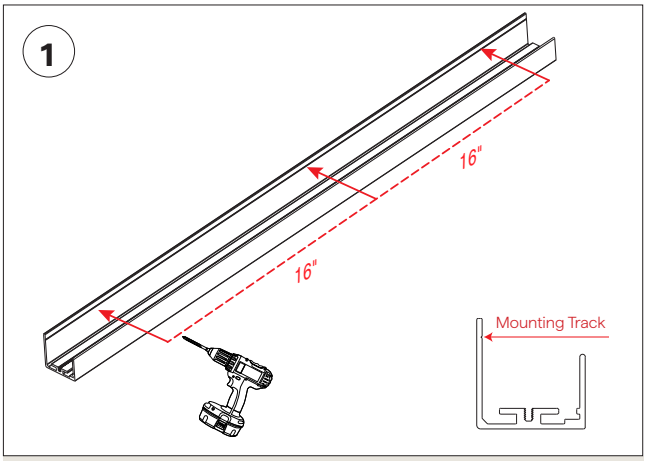


Predrill holes, 16" on the center, into the mounting screw track.

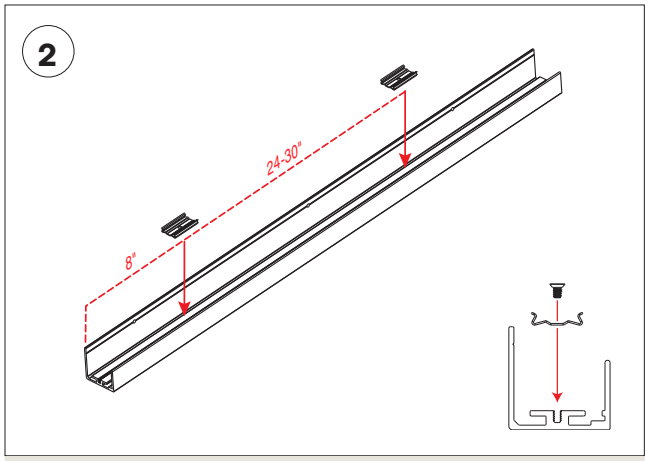

Mount the appropriate clips for the fixture. 2 clips for 4' or less, 4 clips for 8' or less.

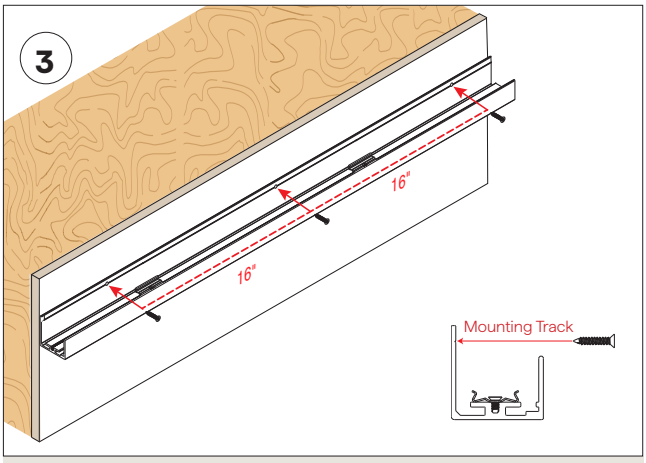

Use the predrilled holes to mount the bracket on to the wall

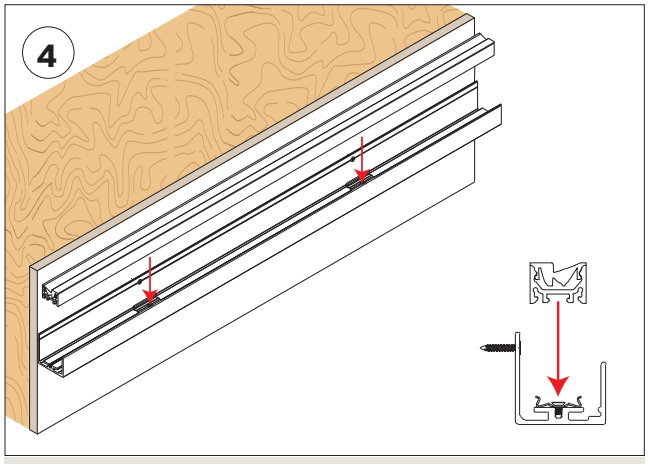

Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JLU BRACKET


Installation Instructions

WALL MOUNTING BRACKET - U

- If using multiple lengths, see **pg 5**

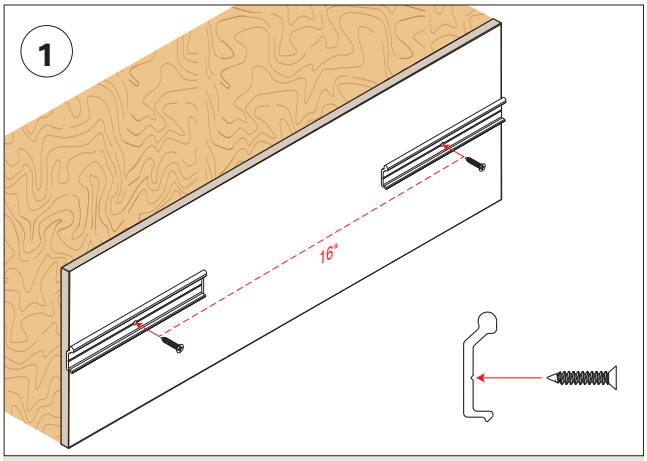


Mount each clip 16" from the center. Refer to **Steps 1 & 2 on pg 3** to prepare the bracket for wall mounting.

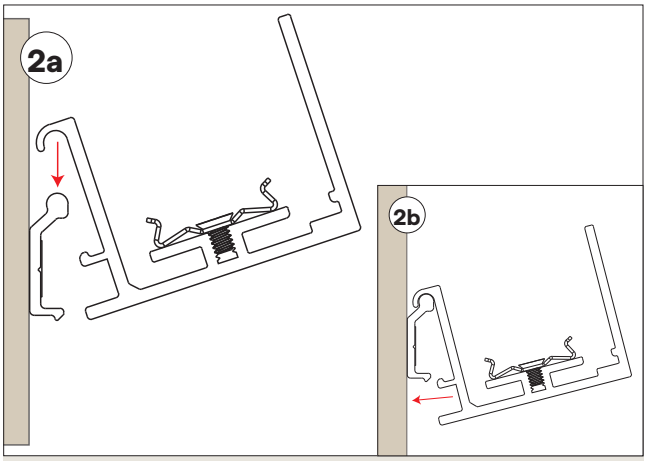

Mount the U Bracket onto the wall mount clip by:

A. Hook in the top portion of the U Bracket onto the top of the mounting clip.

B. Snap the bottom part of the bracket on to the clip, to engage the locking mechanism.

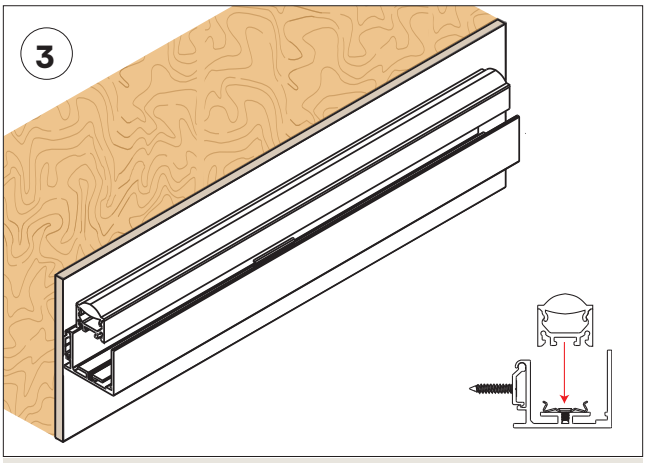


Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


JLU BRACKET

Installation Instructions


INLINE-CONNECTOR FOR J, L, & U BRACKET

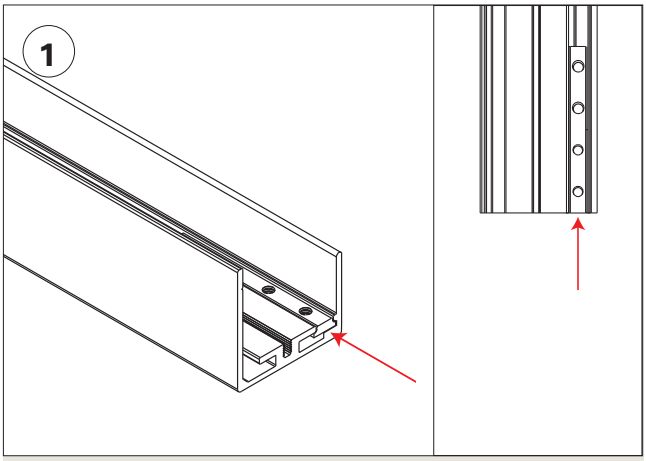


Slide the inline connector into the inline connector slot of the mounted run.

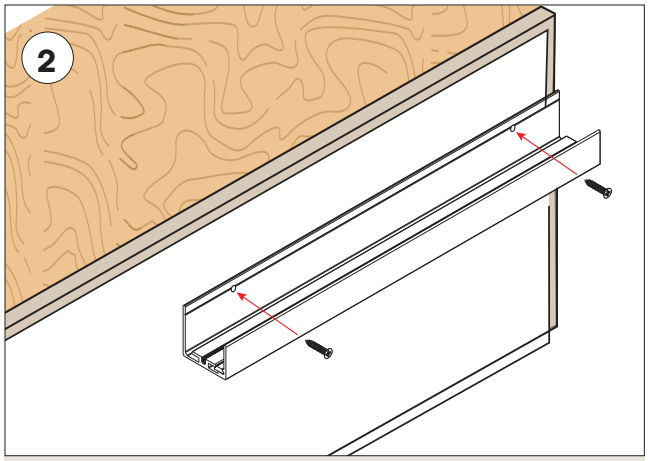

Mount the bracket on to the wall. Refer to **Steps 1 & 2 on pg3** to prepare bracket for wall mounting.

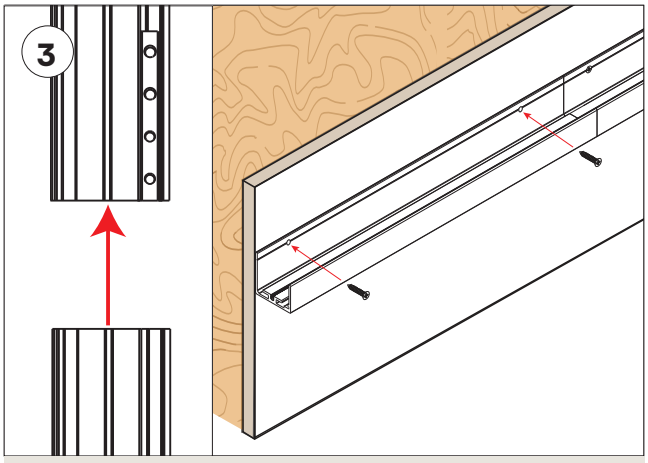

Mount the second bracket to the wall.

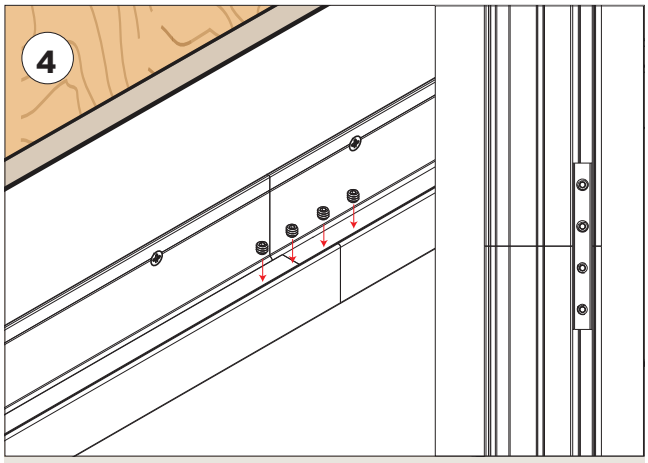



Complete by sliding the inline connector into position to join both brackets. Secure by fastening all set screws, then mount the fixture onto the mounting clips.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SD J, L BRACKET

Installation Instructions

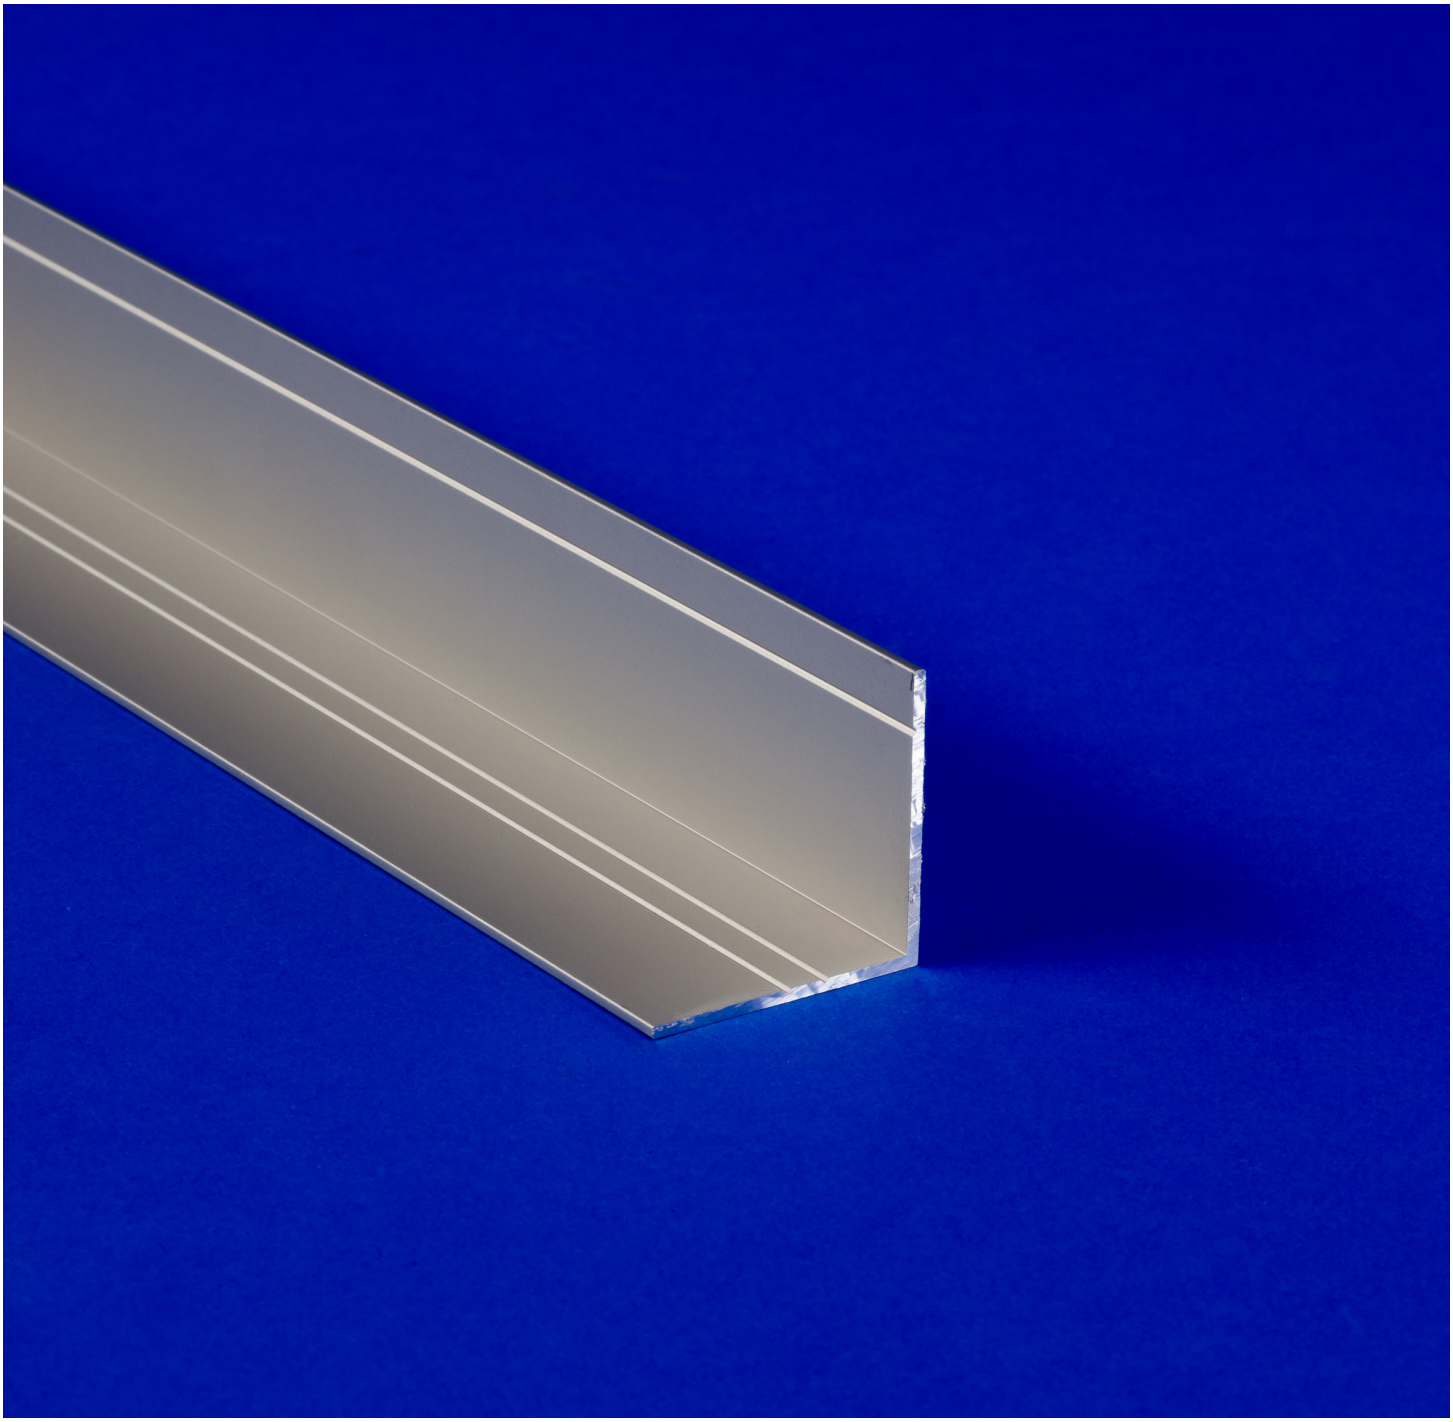



SD-J-LARGE



SD-L-LARGE



SD-L-STANDARD




SD-L-MICRO


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SD J, L BRACKET


Installation Instructions




SD-J-LARGE



SD-L-LARGE




SD-L-STANDARD



SD-L-MICRO

COMPONENTS & HARDWARE

HARDWARE
SS FLAT HEAD PHILLIPS #6x3/4”


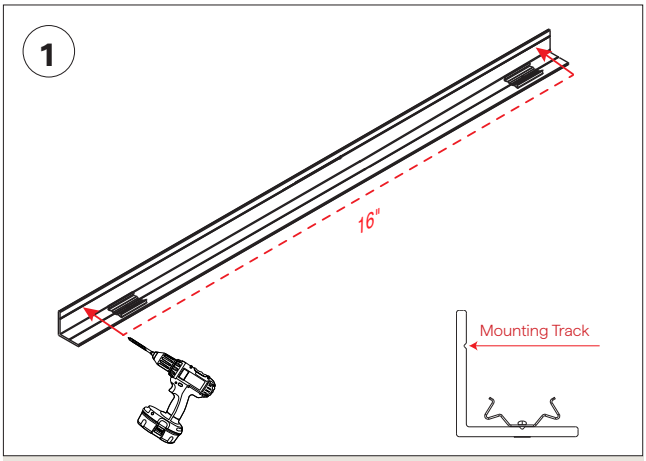
© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SD J, L BRACKET


Installation Instructions

WALL MOUNTING - WITH CLIPS


- 2 clips preinstalled for 4' or less; 4 clips preinstalled for greater than 4'
- For VHB mounting of the fixture see **pg 4**



Predrill holes in the mounting track with 16" on center spacing, being sure to avoid drilling through the mounting clips.

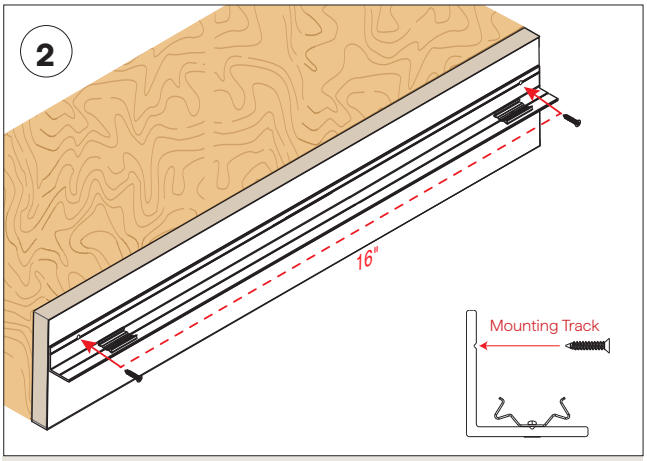

Mount the bracket onto the wall.

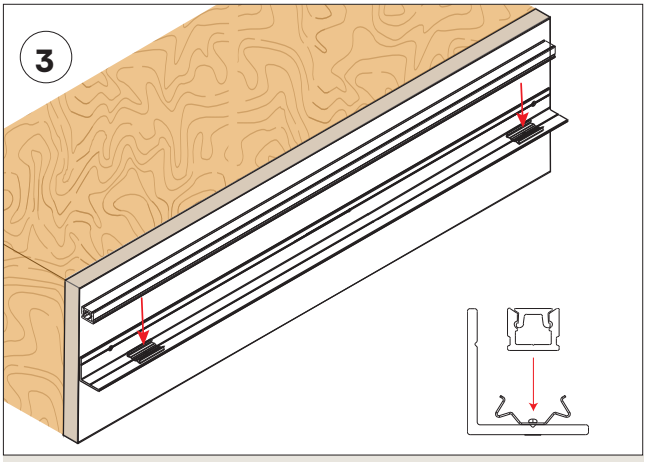

Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SD J, L BRACKET


Installation Instructions

WALL MOUNTING - WITH VHB


● For clip mounting see **pg 3**

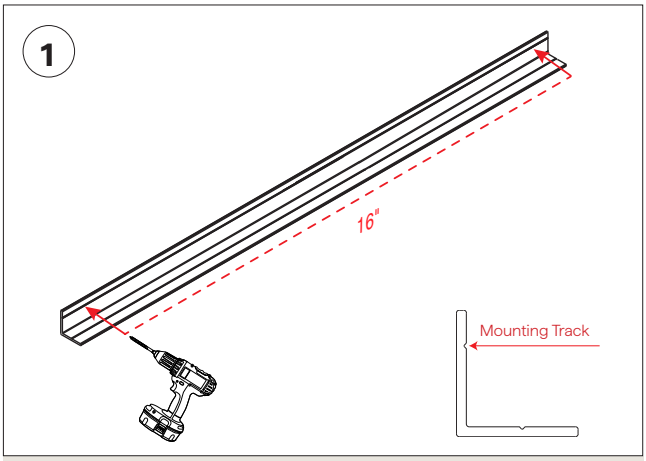

Predrill holes in the mounting track with 16" on center spacing.

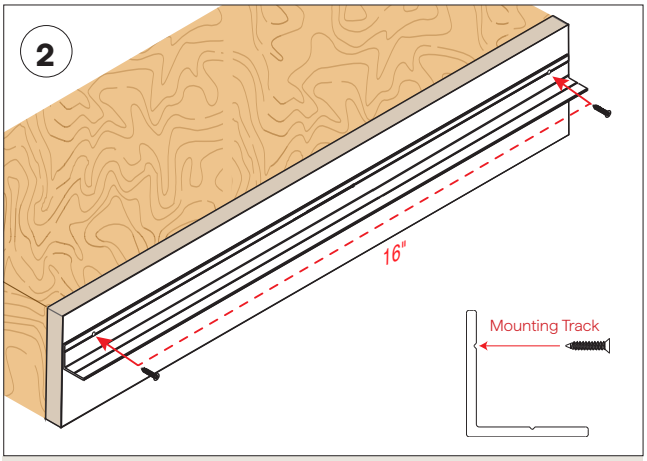


Mount the bracket onto the wall.

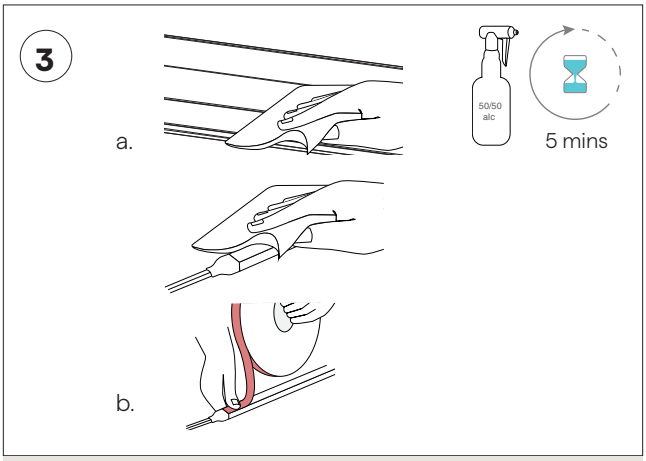

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the Fixture and the bracket where Fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

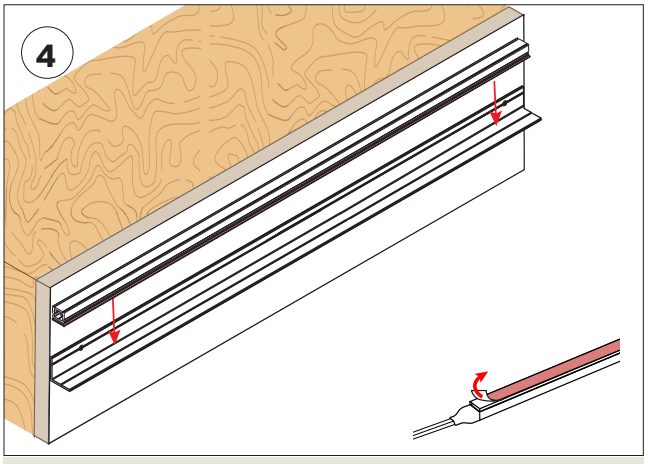



Remove the film and position the fixture onto the bracket. Refer to the fixture installation instructions for any additional steps.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

BACKWARDS L BRACKET

Installation Instructions

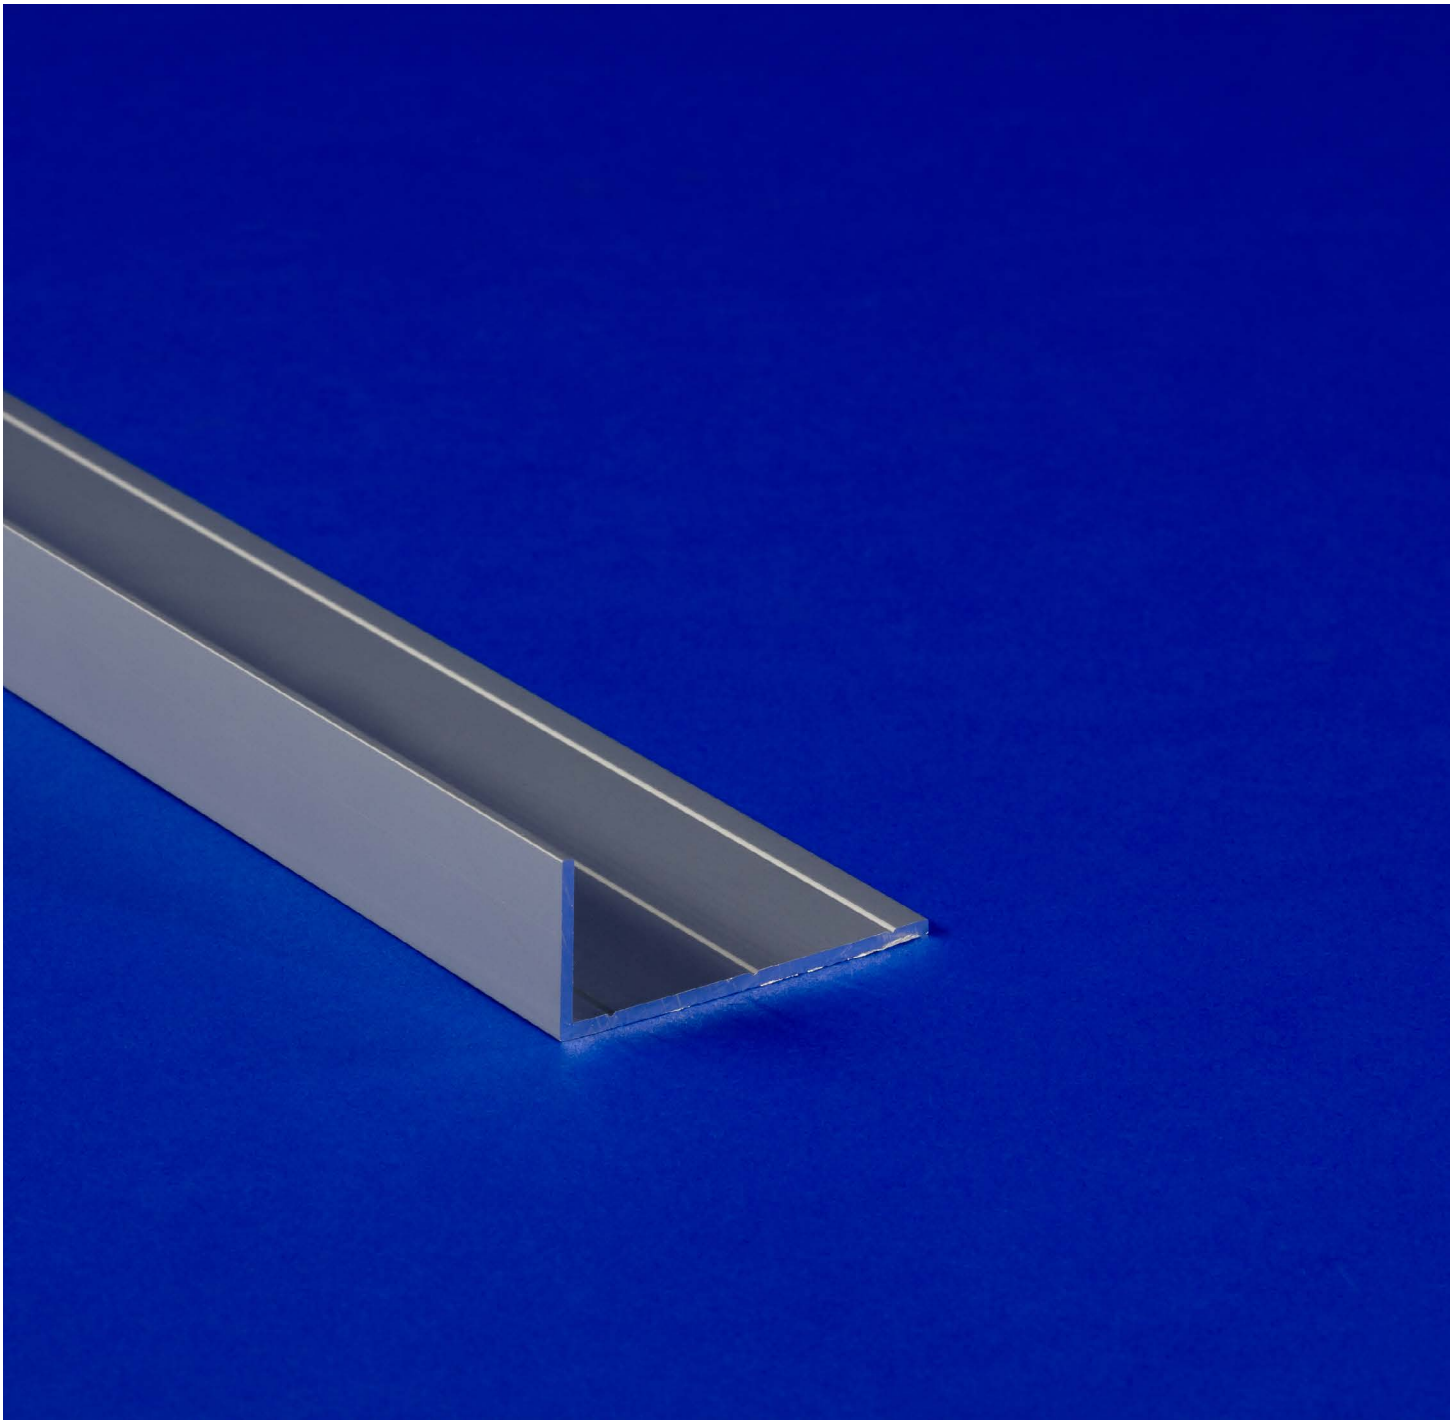



BL-GRAZER



BL-LARGE




BL-MICRO


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

BACKWARDS L BRACKET


Installation Instructions



BL-GRAZER




BL-LARGE



BL-MICRO

COMPONENTS & HARDWARE

HARDWARE
SS FLAT HEAD PHILLIPS #6x3/4”


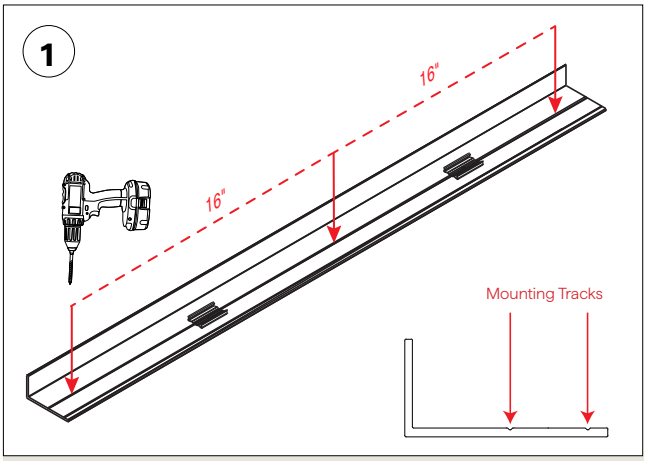
© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

BACKWARDS L BRACKET

Installation Instructions


SURFACE MOUNTING - WITH CLIPS

- 2 clips preinstalled for 4' or less; 4 clips preinstalled for greater than 4'
- For VHB mounting of the fixture see **pg 4**




Predrill holes in the mounting track of your choosing, 16" on center spacing, being sure to avoid drilling through the mounting clips.

NOTE: if installing outdoors, drill holes of at least 1/8" in diameter every 16" to allow water egress. Ensure water can flow out of the bracket.

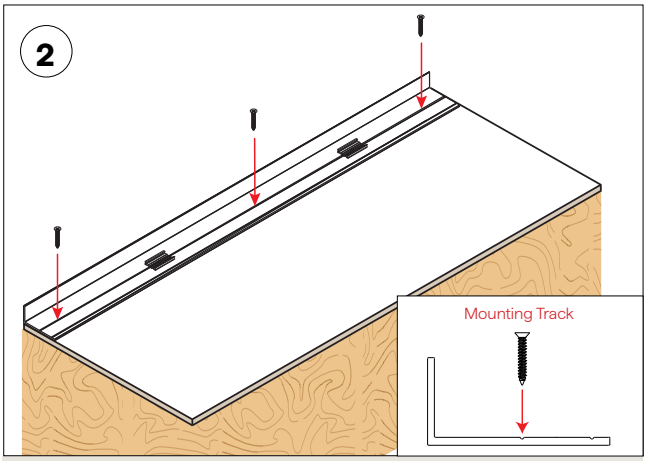

Mount the bracket onto the surface making sure that the "long" face of the bracket mounts to the surface.

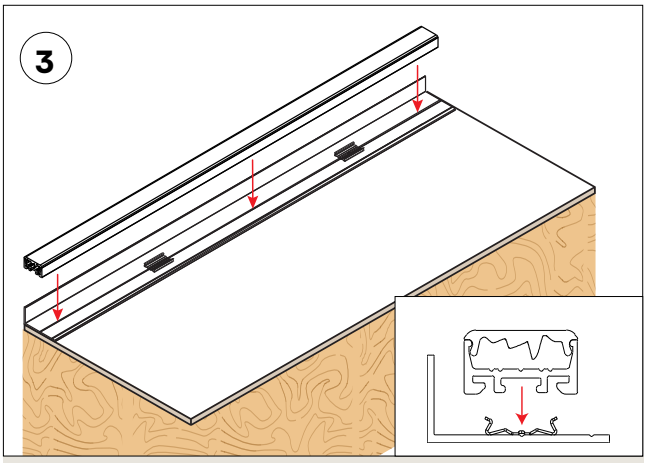

Mount the fixture onto the bracket, refer to the fixture installation instructions for any additional steps.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

BACKWARDS L BRACKET

Installation Instructions


SURFACE MOUNTING - WITH VHB

● For clip mounting see **pg 3**

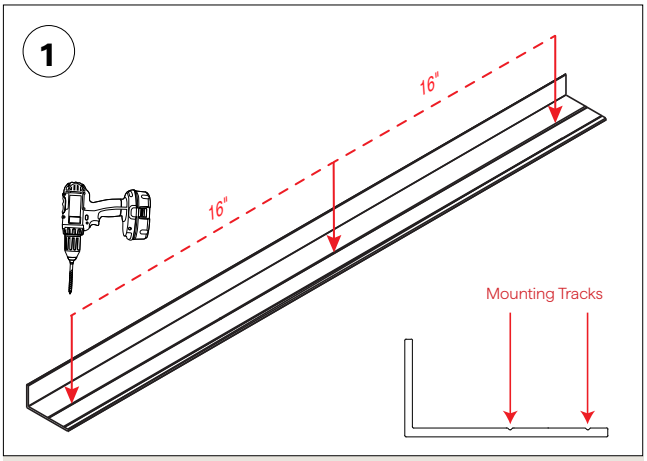


Predrill holes in the mounting track of your choosing, with 16" on center spacing.

NOTE: if installing outdoors, drill holes of at least 1/8" in diameter every 16" to allow water egress. Ensure water can flow out of the bracket.

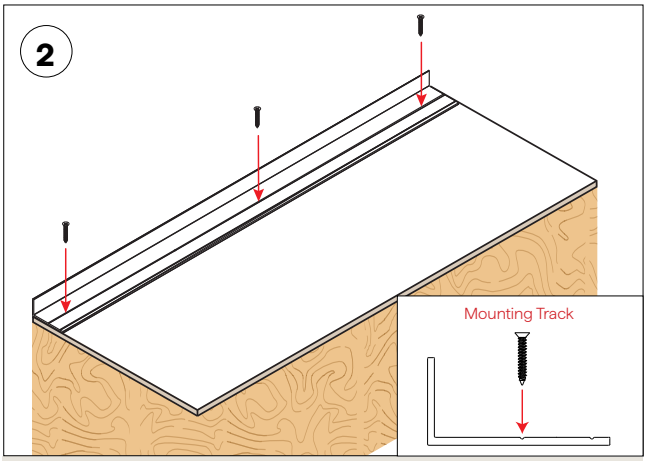


Mount the bracket onto the surface making sure that the "long" face of the bracket mounts to the surface.

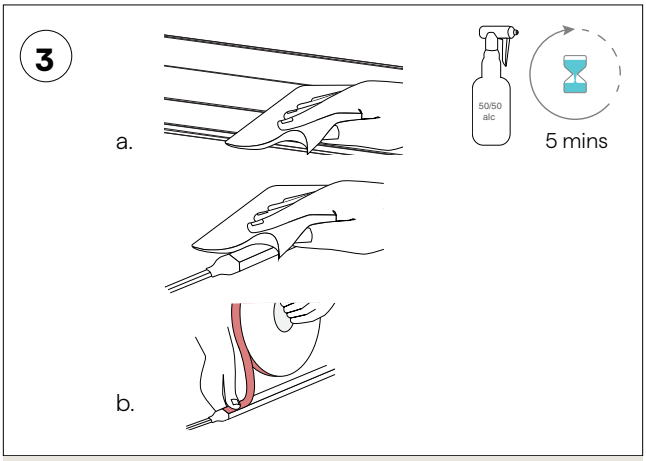

a. Using a 50/50 alcohol mix, thoroughly clean the backside of the Fixture and the bracket where Fixture will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the tape in small sections until the entire length is installed.

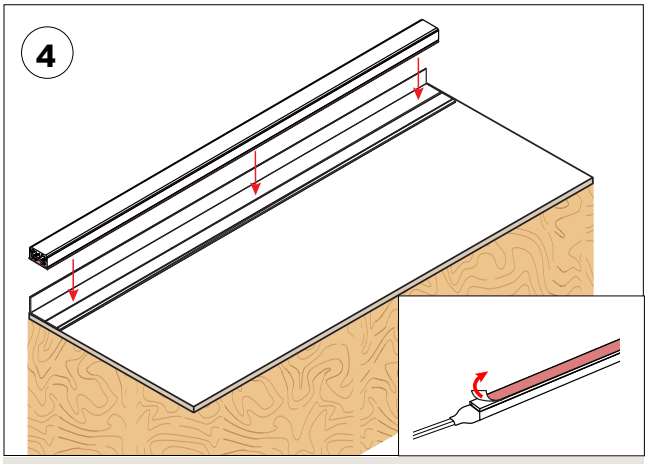

Remove the film and position the fixture onto the bracket. Refer to the fixture installation instructions for any additional steps.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting