
POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod



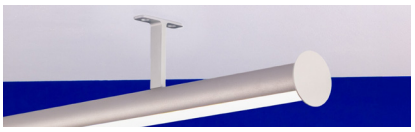

- QTL 1-bin/ 1-step LEDs with 98 CRI for accurate color representation and minimal shadowing
- Hidden wireways on support bracket for clean appearance
- 28 lb/ft load capacity with 48" support bracket spacing, 60 lb/ft with 24" spacing
- Tough, textured type 3 anodized (hardcoat) aluminum resists scratches, corrosion and improves durability
- Meets NEC 410.2 and 410.16 safety standards
- SW & SW-HE LEDs available in a wide range of CCTs: 1800K-4000K and wattages 1.5-4.0W
- Available in three finishes: Satin, Black, Oil-Rubbed Bronze
- IP20 rating
- Supports QTL QZ-STICK-PH/0-10V, QZLP, or any remote power supply

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATE	5 EFFICIENCY	6 LENS
POSH-F-SW			DRY	STD	DF

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
	BW	CL2			SB			

Sample Part Number: **POSH-F-SW-3.0-30-DRY-STD-DF-S2-BW-CLS-WH-CL2-ST-FL48-54-O**

1 PRODUCT

POSH-F-SW

See following pages for compatible power supplies

2 WATTS/FT

1.5	1.5W/FT
3.0	3.0W/FT
4.0	4.0 W/FT
1.5HE	1.5HE W/FT
3.0HE	3.0 HE W/FT

3 CCT

18	1800K
20	2000K
22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

4 RATED

DRY	IP20

5 EFFICIENCY

STD	Standard

6 LENS

DF	Diffused

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

S2	Bottom Feed

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 36")

Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)

10 WIRE COLOR

WH	White
BK	Black

11 WIRE COLOR

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)
Feed length at least 36"

12 FINISH

ST	Satin
BK	Black
OBZ	Oil Rubbed Bronze

13 MOUNTING

FL48	48" bracket spacing - 28 lb/ft

See mounting details for more information about support spacing

FL24	24" bracket spacing - 60 lb/ft

See mounting details for more information about support spacing

14 MOUNTING

Minimum length is 30", maximum length is 98".

Minimum length is 12", maximum length is 98". Contact factory for lengths under 12"

15 EXACT/OPTIMAL

O	Opitmal Illumination
E	Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/ Optimal Fixture Length charts.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-24-26


POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod


1 PRODUCT - DIMENSIONS



Profile



Profile with support bracket



Profile with support bracket and float mount kit

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with POSH-W-SW-**-30-DRY

	1.5W/FT		1.5HE W/FT		3.0W/FT		3.0HE W/FT		4.0W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
DF	111	98	140	98	192	98	267	98	238	98

6 DIODE VISIBILITY

DF - Diffused

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

DF



115°

TEMPERATURE RATINGS

		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4	150°F	-4°F	120°F	-4	125°F	-4°F	90°F


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product



Bare Wire 36"
22 AWG

10 WIRE COLOR



White

Black

12 FINISH




Satin

Black

Oil Rubbed Bronze

13 PRODUCT - DIMENSIONS

FLOAT MOUNT KIT




Float Endcap, Closet Rod Support Bracket
and Closet Rod Wire Stay Support Bracket

2 float endcaps, 1 closet rod support bracket, and 1 closet rod wire stay support bracket included in purchased kit

To order more float mounting kits use
Black: POSH-Float-Mounting-Kit-BK
Satin: POSH-Float-Mounting-Kit-ST
Oil Rubbed Bronze: POSH-Float-Mounting-Kit-OBZ

Each float mount kit comes
with M3.5 x 25mm flat head screws.

SB



Closet Rod
Support Bracket

To order more support brackets use
Black: POSH-SB-BK
Satin: POSH-SB-ST
Oil Rubbed Bronze: POSH-SB-OBZ

Each support bracket comes
with M3.5 x 25mm flat head screws.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod


MOUNTING EXAMPLES


POSH FLOAT WITH 48" SPACING - 28 lbs/ft MAX

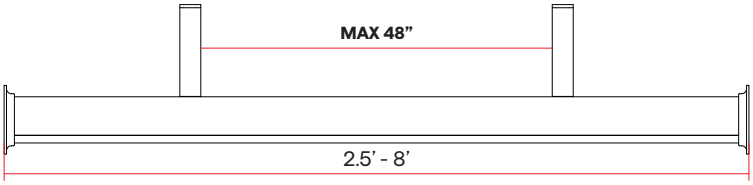

NOTE: Deflection up to 1/2” may be visible with 48” spacing unless load is distributed evenly

POSH FLOAT WITH 24" SPACING - 60 lbs/ft MAX

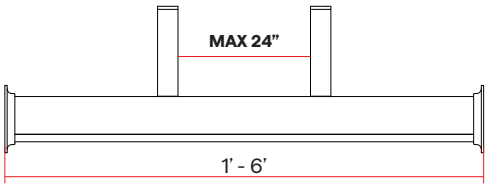

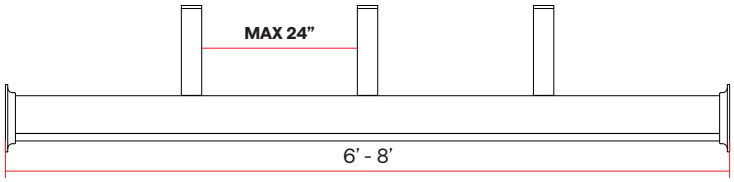


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod


15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

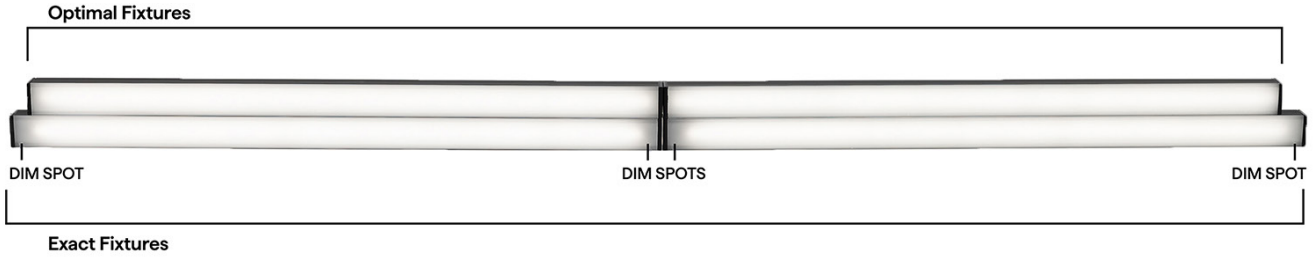

SW DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S2 fixture  Bottom Feed
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S2  Bottom Feed
12"	11.41"
13"	12.41"
14"	13.41"
15"	14.41"
16"	15.41"
17"	16.41"
18"	17.41"
19"	18.41"
20"	19.41"
21"	20.41"
22"	21.41"
23"	22.41"
24"	23.41"
36"	35.41"
48"	47.41"
60"	59.41"
72"	71.41"
84"	83.41"
96"	95.41"


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT STATIC WHITE


Linear Fixtures - Closet Rod

SW-HE DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S2 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S2 
12"	10.41"
13"	12.41"
14"	12.41"
15"	14.41"
16"	14.41"
17"	16.41"
18"	16.41"
19"	18.41"
20"	18.41"
21"	20.41"
22"	20.41"
23"	22.41"
24"	22.41"
36"	34.41"
48"	46.41"
60"	58.41"
72"	70.41"
84"	82.41"
96"	94.41"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT STATIC WHITE

Linear Fixtures - Closet Rod

COMPATIBLE APPS

NFC APP

Q-NFC

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT

Installation Instructions

ATTENTION: Please read all instructions BEFORE installation


- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Compatible for use with QTL power supplies
- Available in Static White, Static White High Efficacy.
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION


Profile




Endcaps




Endcaps-Inner Fixture



Endcaps-Hanger Stopper



Support Bracket




Wire Stay Support Bracket

Bracket

Recommended Tools:

- 6-32 allen key
- 3/16" drill bit

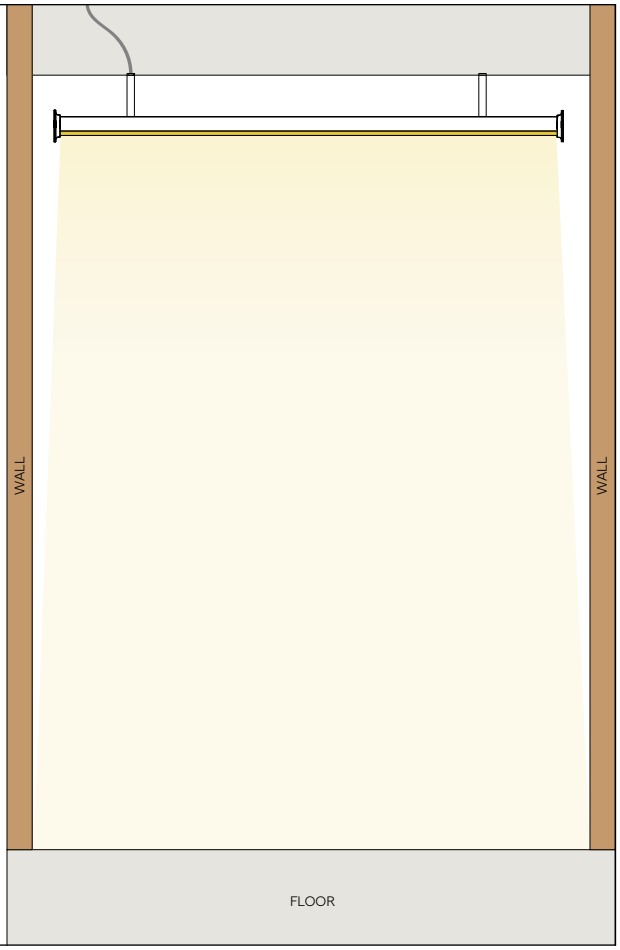

- COMPONENTS & HARDWARE (PAGE 2)
- MOUNTING EXAMPLES (PAGE 3)
- FLOAT (PAGE 4)


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH FLOAT


Installation Instructions



Profile




Profile with support bracket







Profile with endcap hanger stopper and support bracket

COMPONENTS & HARDWARE: load rating applies to rod and brackets only. Mounting surface must be structurally capable of supporting this load.

Recommended Tools:
- 6-32 allen key
- 3/16" drill bit

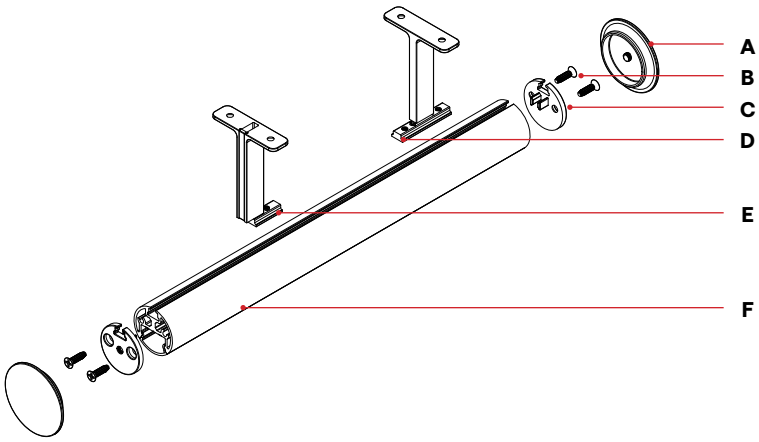


- **A.** Endcaps-Hanger Stopper
- **B.** Provided Screws
- **C.** Endcaps-Inner Fixture
- **D.** Support Bracket
- **E.** Wire Stay Support Bracket
- **F.** Fixture

ENDCAPS		BRACKET	
			
ENDCAPS-INNER FIXTURE	ENDCAPS-HANGER STOPPER	SUPPORT BRACKET	WIRE STAY SUPPORT BRACKET

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


MOUNTING EXAMPLES


POSH FLOAT WITH 48” SPACING - 28 lbs/ft MAX

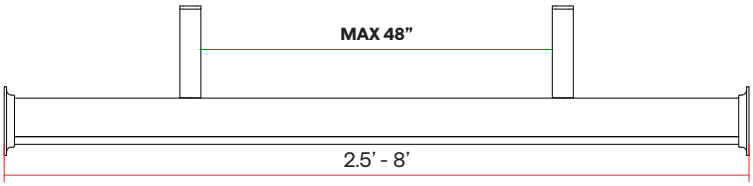

NOTE: Deflection up to 1/2” may be visible with 48” spacing unless load is distributed evenly

POSH FLOAT WITH 24” SPACING - 60 lbs/ft MAX

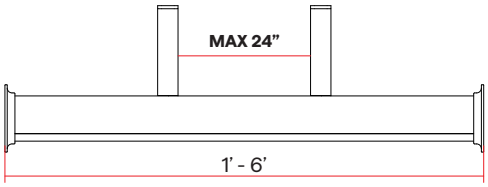

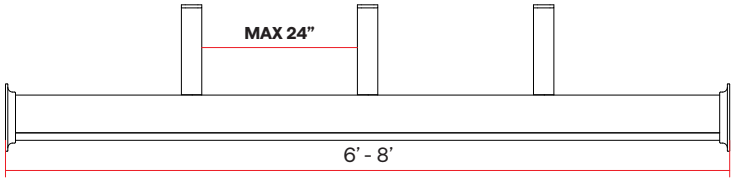


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


POSH FLOAT

Installation Instructions


MOUNTING METHOD: **FLOAT INSTALL**

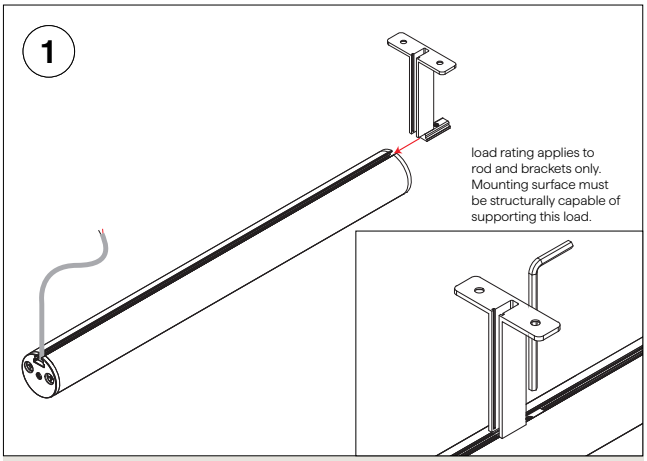


- Slide Wire Stay Support Bracket in from non-wire feed side and position Wire Stay Support Bracket according to the spacing required until the wire feed end. Then lock in place with set screw.

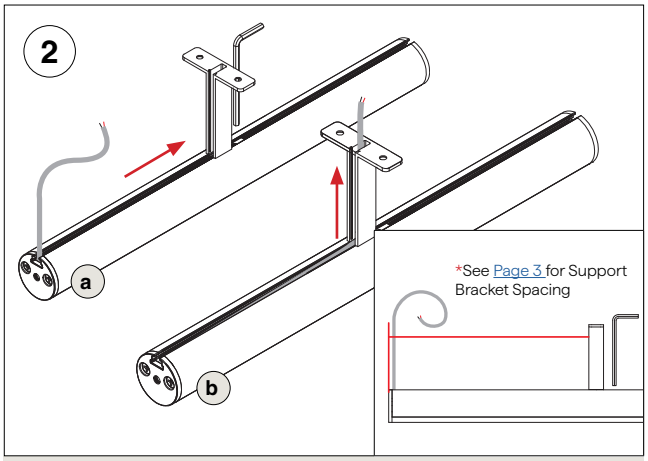

- Press wire into top channel and wire stay support (**a-b**).

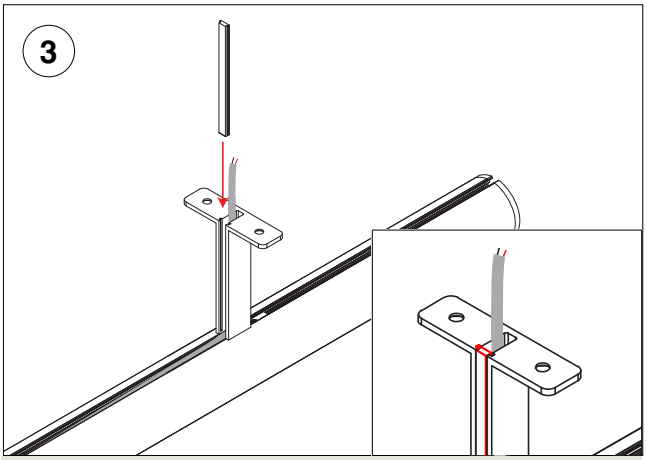


- Slide in wire stay lid to cover the vertical wire.

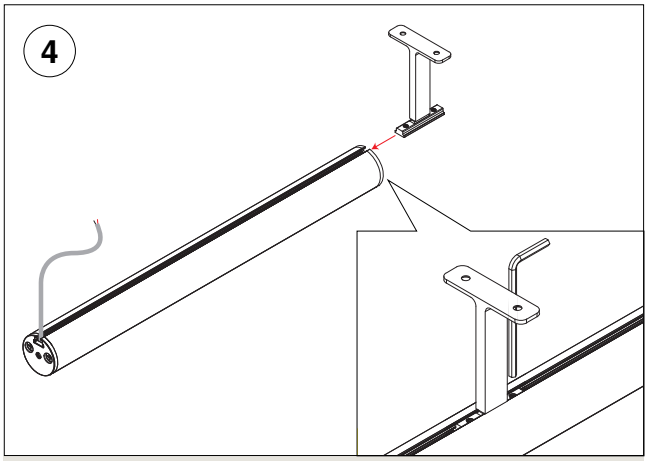


- Slide standard support in from non-wire feed side within the range of specified maximum support bracket spacing indicated on page 3, then lock in place with set screw.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


MOUNTING METHOD: **FLOAT INSTALL**

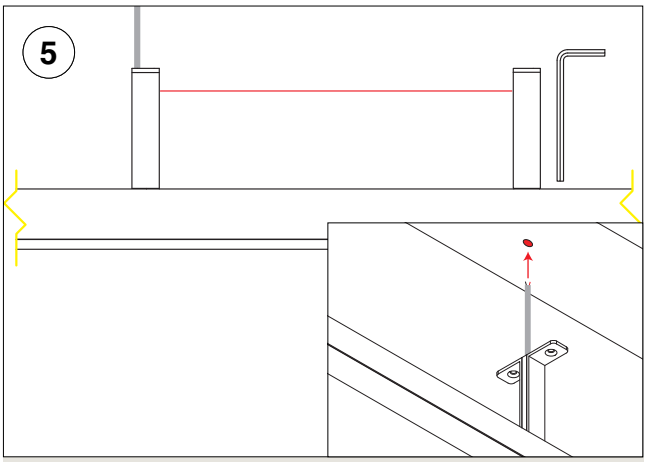

- Once all Support Brackets are in bring fixture up to desired mounting surface to mark the power feed hole location. Then drill out hole for wire feed (could also mark/drill pilot hole locations for other Support Brackets).
- Recommended hole size of 3/16"

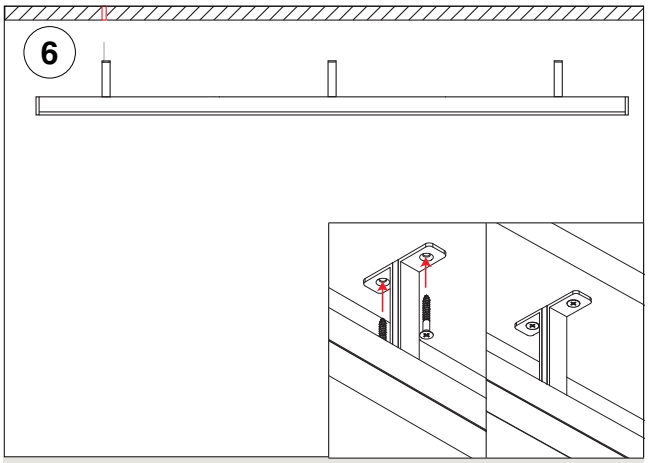


- Once the power feed hole location is drilled, pass power feed from the fixture through the hole, and mount the fixture to desired mounting surface using provided screws (Blocking required by others if necessary).

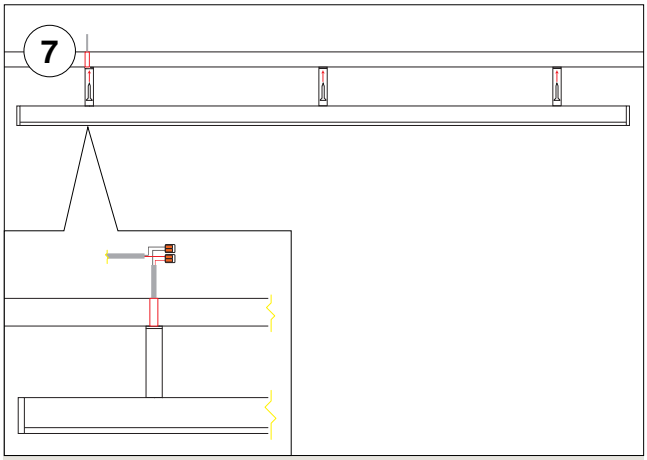

- After mounting the fixture to the surface make connection in the space above.

NOTE: External driver and feed wire not included (24V Input Voltage Required).

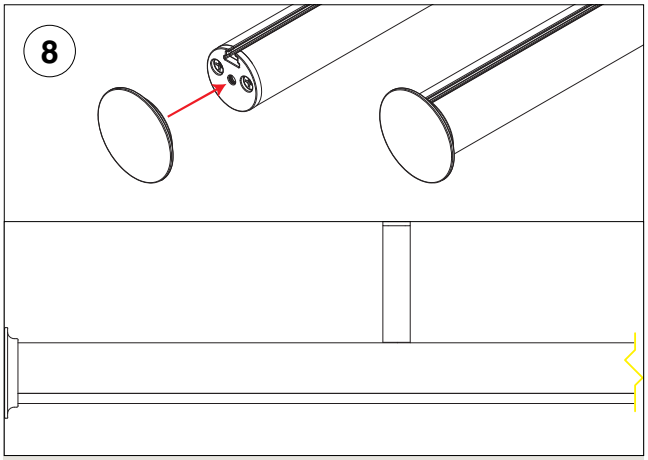

- Once fully mounted screw on Endcaps-Hanger Stopper.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH

Linear Fixtures Color Data

POSH-SW-1.5-30-DRY-DF

3108 K

CRI: 97.7

CRI R9: 97.8

TM30 Rf: 94.3

TM30 Rg: 101.4

CQS: 95.3


X: 0.427


Y: 0.395


U: 0.248

V: 0.344

Δuv: -0.0023







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.0	98.4	97.0	98.2	97.6	96.3	98.7	98.7	97.8	98.8	95.9	83.6	97.0	97.2	96.9
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
94.1	97.2	91.6	92.1	95.3	98.3	95.0	96.8	97.1	97.0	97.3	98.3	98.4	96.0	95.7
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
96.1	97.6	96.6	95.2	93.5	97.1	93.1	98.1	93.7	90.8	90.8	92.2	95.6	93.3	92.6	90.3

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	0%	1%
2	98	0%	0%
3	97	0%	0%
4	95	-2%	-1%
5	94	-4%	0%
6	97	1%	1%
7	93	-2%	3%
8	98	0%	1%
9	94	1%	4%
10	91	1%	5%
11	91	3%	6%
12	92	5%	0%
13	96	1%	-3%
14	93	4%	-3%
15	93	0%	-1%
16	90	3%	-8%

POSH-SW-3.0-30-DRY-DF

3045 K

CRI: 97.9

CRI R9: 98.1

TM30 Rf: 96.0

TM30 Rg: 102.8

CQS: 96.0


X: 0.433

Y: 0.401


U: 0.249

V: 0.346

Δuv: -0.0007







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.0	99.6	96.4	95.5	98.0	97.8	98.4	99.2	98.1	99.1	92.4	90.7	98.4	97.2	99.2
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
97.0	97.8	93.6	97.0	95.4	92.7	94.9	98.0	97.6	97.4	98.0	97.5	97.7	97.4	97.5
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
97.3	98.3	97.1	97.9	95.6	95.5	96.1	96.2	96.8	97.6	94.5	93.4	96.1	93.7	94.7	90.9

TM30			
Hue Bin	R_f	Chroma	Hue
1	97	0%	-1%
2	98	0%	0%
3	97	0%	1%
4	98	0%	0%
5	96	-1%	1%
6	96	3%	1%
7	96	1%	0%
8	96	2%	-1%
9	97	1%	0%
10	98	0%	1%
11	95	2%	3%
12	93	3%	1%
13	96	2%	-2%
14	94	4%	-3%
15	95	1%	-2%
16	91	3%	-7%

POSH-SW-4.0-30-DRY-DF

3068 K

CRI: 98.1

CRI R9: 95.9

TM30 Rf: 93.8

TM30 Rg: 100.2

CQS: 95.3


X: 0.432


Y: 0.401


U: 0.249

V: 0.346

Δuv: -0.0006







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.1	99.2	97.3	99.0	98.3	97.0	98.0	97.8	95.9	99.5	97.0	82.8	98.2	97.4	98.2
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.6	96.6	92.5	92.4	94.7	97.1	96.5	97.5	97.4	97.7	98.2	98.0	98.1	96.3	95.1
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.5	97.6	96.8	94.1	93.2	97.2	92.5	97.0	92.6	89.9	90.9	91.9	94.9	92.8	91.8	90.1

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	94	-3%	-2%
5	93	-5%	0%
6	97	-1%	1%
7	92	-3%	4%
8	97	0%	2%
9	93	0%	5%
10	90	1%	6%
11	91	3%	6%
12	92	5%	-1%
13	95	1%	-3%
14	93	3%	-4%
15	92	0%	-1%
16	90	2%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

POSH

Linear Fixtures Color Data

POSH-SW-1.5HE-30-DRY-DF

3043 K

CRI: 98.0

CRI R9: 98.3

TM30 Rf: 93.8

TM30 Rg: 100.6

CQS: 95.1


X: 0.432


Y: 0.399


U: 0.250

V: 0.346

Δuv: -0.0014







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.7	98.8	97.1	98.9	98.1	96.7	98.3	98.5	98.3	99.6	96.8	82.5	97.7	97.3	97.7
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.9	96.8	91.8	91.8	94.5	97.5	95.5	96.9	97.2	97.2	97.6	98.3	98.4	96.0	95.2
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.6	97.5	96.7	94.3	93.1	97.1	92.7	97.5	92.7	89.7	90.0	92.3	95.2	92.9	92.0	90.1

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	0%	1%
2	98	0%	0%
3	97	0%	0%
4	94	-3%	-2%
5	93	-5%	0%
6	97	0%	1%
7	93	-3%	4%
8	98	0%	2%
9	93	0%	5%
10	90	1%	6%
11	90	4%	7%
12	92	5%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-1%
16	90	2%	-8%

POSH-SW-3.0HE-30-DRY-DF

3029 K

CRI: 98.2

CRI R9: 96.7

TM30 Rf: 93.9

TM30 Rg: 100.4

CQS: 95.3


X: 0.434


Y: 0.402


U: 0.250

V: 0.347

Δuv: -0.0006







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.1	99.4	96.9	98.9	98.4	97.2	98.3	98.2	96.7	99.2	96.8	82.6	98.3	97.2	98.2
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
92.8	96.6	92.1	92.3	94.9	97.6	96.1	97.4	97.2	97.5	98.1	97.9	98.0	96.3	95.2
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
95.7	97.6	96.7	94.3	93.1	97.2	92.8	97.3	92.9	90.1	90.2	92.3	95.1	92.8	91.9	90.0

TM30			
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	98	0%	0%
3	97	0%	0%
4	94	-3%	-2%
5	93	-5%	0%
6	97	0%	1%
7	93	-3%	4%
8	97	0%	2%
9	93	0%	5%
10	90	1%	6%
11	90	4%	6%
12	92	4%	0%
13	95	1%	-3%
14	93	4%	-4%
15	92	0%	-1%
16	90	2%	-8%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-03-04-26