QOM-eLED+WD

24V DC Power Supply - 100W–400W



- Surface mount, exterior rated LED power supply center.
- Utilizes a 100W constant voltage LED driver.
- Perfect for warm dim lighting applications.
- Capable of handling up to 400W of power and control within a single enclosure, offering flexibility in lighting applications.
- Provides plenty of flexibility and comes with all modules prewired together with terminal blocks for landing your LED and control wires.
- Suitable for both indoor and outdoor use, making it versatile for various lighting applications.

1 PRODUCT	2 WATTAGE	3 PRIMARY VOLTAGE	4 SECONDARY VOLTAGE	5 CONTROL	6 COLOR
QOM-eLED		UNV	24VDC	WD	

Sample Part Number: **QOM-eLED-100W-UNV-24VDC-WD-BK**

1 PRODUCT

QOM-eLED	

2 WATTAGE

100W	
200W	
300W	
400W	

3 PRIMARY VOLTAGE

UNV	Universal (120-277V)

4 SECONDARY VOLTAGE

24VDC	

5 CONTROL

WD	Warm Dim

6 COLOR

BK	Black Powder Coat Finish (Standard)
SS	316 Marine Grade Stainless Steel

COMPATIBLE LEDS

STATIC WHITE

SW24/1.5-4.0 SW-DR24/1.5-4.0 SHLD-SW24/1.5-4.0 SW-SCOB24/1.5-4.0	
SW24/5.0, SW-HE, SW-HE+ SW-DR24/5.0, SW-HE-DR SHLD-SW24/5.0, SHLD-SW-HE SW-SCOB24/5.0	
SW-SD24/1.0-4.0	
SW-SD24/6.0	
SW-IA	
SW-XT	

OTHER

DW-HE Tunable Applications	
DW-HE Warm Dim Applications	✓
WD	
SC	
RGB	
RGBW, RGBW-HE	

SHEETS

Q-SHEETS SW	
Q-SHEETS DW Tunable Applications	
Q-SHEETS DW Warm Dim Applications	
Q-SHEETS RGB	
Q-SHEETS RGBW	

MICRO 5

MICRO 5-SW	
MICRO 5-DW Tunable Applications	
MICRO 5-DW Warm Dim Applications	✓
MICRO 5-RGB	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+WD

24V DC Power Supply - 100W–400W

PRODUCT INFORMATION

- Limited output voltage and current, plus isolation for safe operation
- QTL proprietary dimming curve
- Controllable with 0-10V input for Warm-Dim functionality
- 0-10V dimming down to 0%
- Fully potted driver(s) for moisture resistance
- Surface mount, exterior rated LED power supply center
- Primary voltage - universal (120-277V)
- Wide operating temperature range: -40˚F to 104˚F
- Fits up to (4): 100W 24 VDC driver(s) and Warm Dim Module
- 5-year warranty
- Driver has Class A sound rating
- Class 2 output
- CSA #239924
- Low Voltage Lighting Systems
  - CSA Class 3425-15 and Class 3425-95
  - CSA Standard C22.2 No. 250.0-08 - Luminaires
  - UL 2108 - Low Voltage Lighting Systems
  - ANSI/UL Standard 2108 - Low Voltage Lighting System
  - ANSI/UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
  - CSA Std C22.2 No. 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications
- Landscape Lighting Systems
  - CSA Class 3402-15 and Class 3402-95
  - CSA Standard C22.2 No. 250.7-07 - Extra-Low-Voltage Landscape Lighting Systems
  - ANSI/UL Standard 1838 - Low Voltage Landscape Lighting Systems
  - ANSI/UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
  - CSA Std C22.2 No. 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications

VOLTAGE DROP CHART

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved

VOLTAGE DROP

Distance from PS for 1% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	15	192	121	76	48	30	19	12	7	5
24	30	96	60	38	24	15	9	6	4	2
24	45	64	40	25	16	10	6	4	2	2
24	60	48	30	19	12	8	5	3	2	1
24	80	36	23	14	9	6	4	2	1	1
24	96	30	19	12	7	5	3	2	1	1

Distance from PS for 3% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	15	577	362	228	143	90	57	36	22	14
24	30	288	181	114	72	45	28	18	11	7
24	45	192	121	76	48	30	19	12	7	5
24	60	144	91	57	36	23	14	9	6	4
24	80	108	68	43	27	17	11	7	4	3
24	96	90	57	36	22	14	9	6	4	2


Distance from PS for 5% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	15	961	604	380	239	150	95	59	37	24
24	30	480	302	190	120	75	47	30	19	12
24	45	320	201	127	80	50	32	20	12	8
24	60	240	151	95	60	38	24	15	9	6
24	80	180	113	71	45	28	18	11	7	4
24	96	150	94	59	37	23	15	9	6	4

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+WD

24V DC Power Supply - 100W–400W

1 PRODUCT - DIMENSIONS

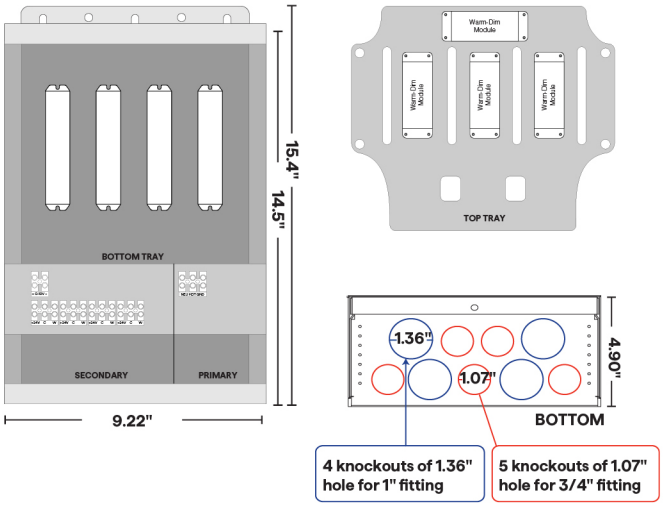

2 TECHNICAL INFORMATION

Wattage	Max Load (Watts)	Secondary Voltage	Max Prim Amps @ 120V	Max Prim Amps @ 277V
100W	1×100W	24VDC	0.95A	0.40A
200W	2×100W	24VDC	1.90A	0.80A
300W	3×100W	24VDC	2.85A	1.20A
400W	4×100W	24VDC	3.80A	1.60A

HOUSING

- 18 gauge welded steel enclosure: 15.4"L x 9.22"W x 4.90"D
- Door: 14.5"L x 9.27"W
- Knockouts: 9
- Built-in support bracket incorporated to secure housing for surface mounting

PERFORMANCE

- Rated for surface mount or outdoor use
- Fully rated to operate low voltage load at listed wattage (No derating required)
- Voltage regulation to 2% or less of rated output voltage
- The ability to be dimmed using 0-10V dimming
- Universal input range of 120-277 Vrms
- Low Voltage Lighting Systems
  - CSA Class 3425-15 and Class 3425-95
- LED Landscape Lighting System Components
  - CSA Class 3402-15 and Class 3402-95
  - Short circuit protection (SCP)
  - Over voltage protection (OVP)
  - Over current protection (OCP)
  - Live tested by the manufacturer to ensure proper operation
- Terminal blocks are made of tin plated copper with a voltage rating of 300V and a current rating of 40A

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+WD

24V DC Power Supply - 100W–400W

SPECIFICATIONS


Input	24VDC		
Input Voltage (Vrms)	120	230	277
Input Current, max (Arms)	0.98	0.51	0.43
Inrush Current, max* (Apk)	-	20	-
Input Frequency (Hz)	50/60		
Input Power (Wmax)	117		

Output	3000K	2000K
Output Voltage, nom (V)	24	24
Output Current (A)	2.0	1.5
Output Power (Wmax)	100	100
Dimming 0-10V, max	2mA	

Environmental	Min	Nom	Max
THD (%)	-	-	20
PF (%)	0.90	-	-
Case Temp (°F)	-	-	90

*-200us event

Dim to Warm Intensity

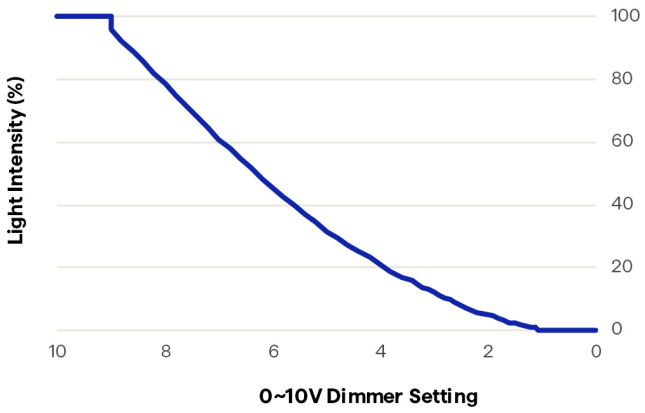

PROTECTIONS

- Short Circuit Protection (SCP)
- Over Voltage Protection (OVP)
- Over Current Protection (OCP)
- Class 2 Output

COMPLIANCE

- EMI Spec
  - FCC 47 Part 15
  - EN61000-3-2
- CSA Certified
  - UL-2108
  - UL-1838
  - UL-8750
  - CSA C22.2 No 250.7-07
  - CSA C22.2 No 250.0-08
  - CSA C22.2 No 250.13-14

6 COLOR



Black Powder Coat Finish (Standard)


316 Marine Grade Stainless Steel

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

QOM-eLED+WD


24V DC Power Supply - 100W–400W

CCT Dimming Curve

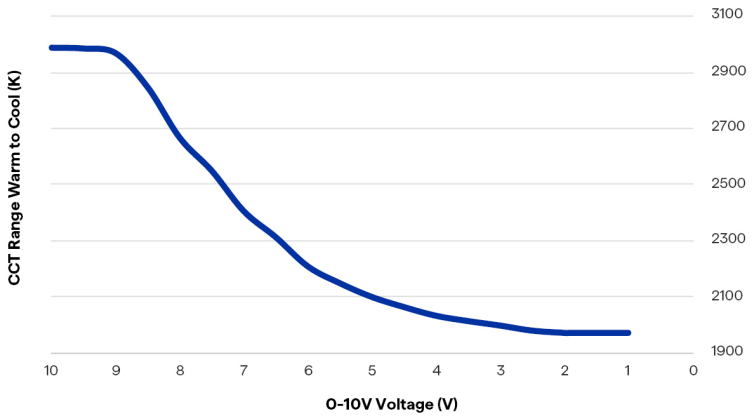


*Tested with DW-HE24/2.5-DRY-20/30

Life Time vs. Case Temperature

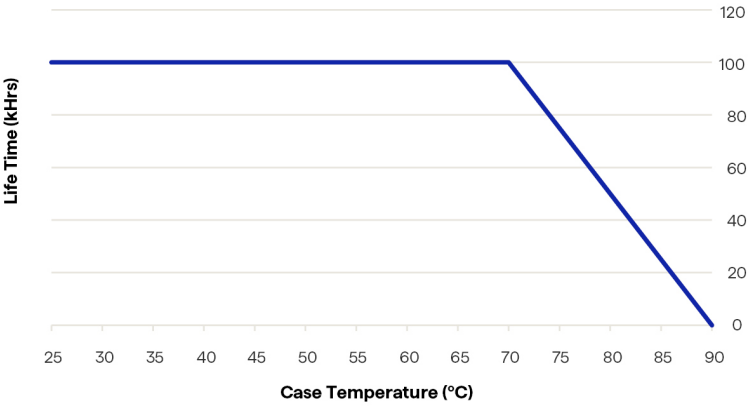

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

QOM-eLED+WD

Installation Instructions

- **Must be installed by licensed electrician.**

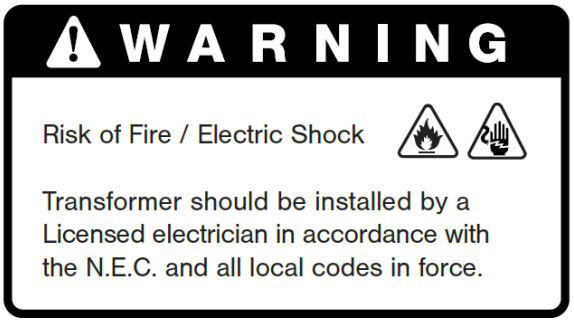

LOW VOLTAGE LIGHTING SYSTEM & LANDSCAPE LIGHTING SYSTEMS

CLASS: **3425-15** **3402-15** **3425-95** **3402-95**


- Wear rubber shoes and work on a sturdy wooden or fiberglass ladder.
- This power supply must be installed according to the National Electric Code and local codes and ordinances.
- This power supply is to be installed and serviced only by an licensed electricians.
- This power supply is to be installed so that it is not likely to be contacted by people.
- To avoid a hazard to children, account for all parts and destroy all packaging materials.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


QOM-eLED+WD

Installation Instructions

Housing

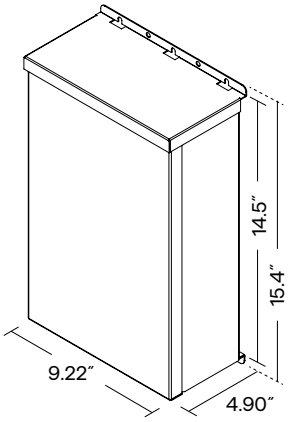



ISOMETRIC VIEW

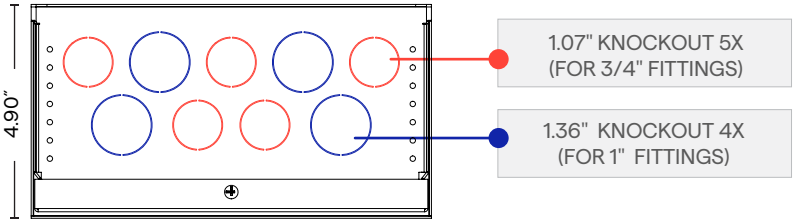


BOTTOM VIEW

Mounting Options

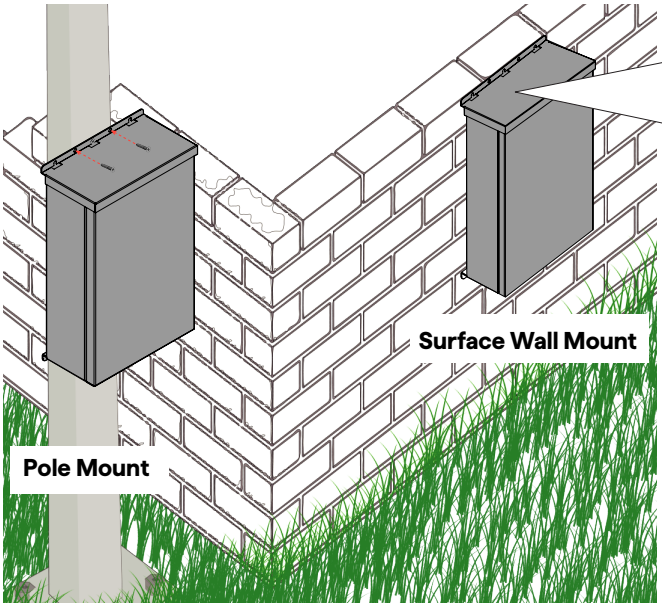

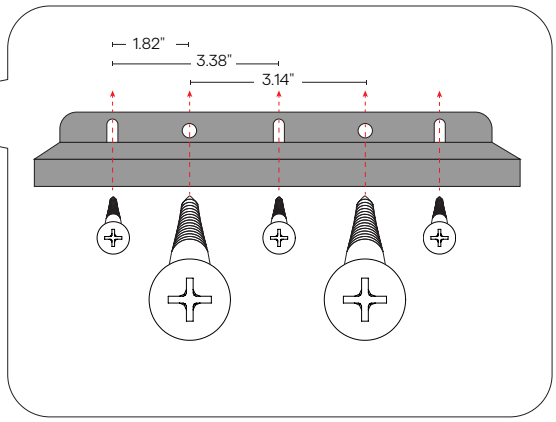



NOTE:


- To order additional lengths of wire for connection in the secondary. Please call factory for availability.
- QOM must be installed as shown.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QOM-eLED+WD

Installation Instructions

POWER TRAY INSTALL

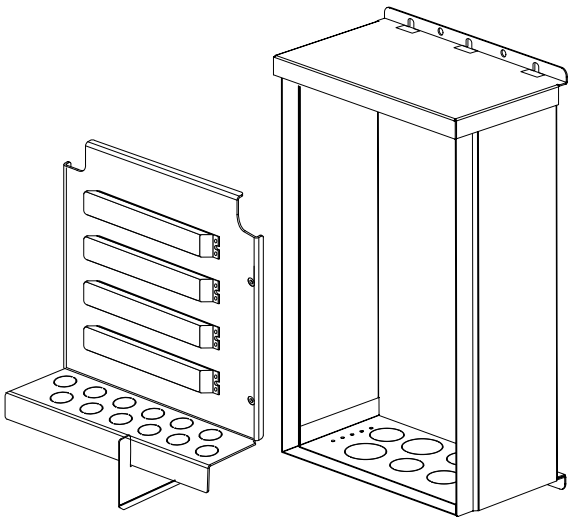

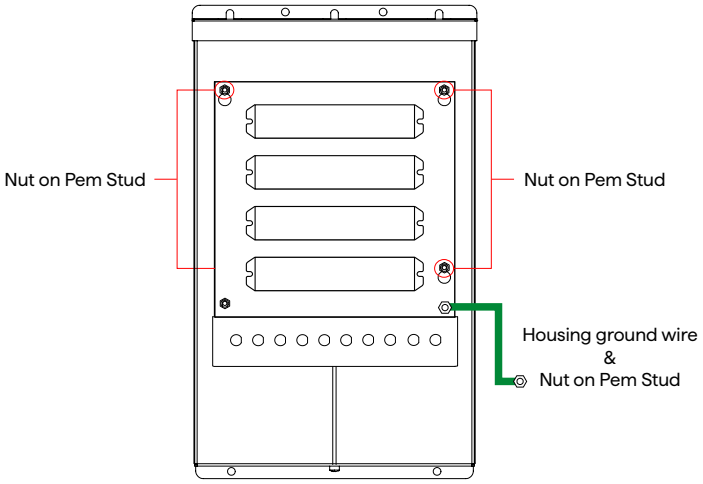


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QOM-eLED+WD

Installation Instructions

WIRING DIAGRAM

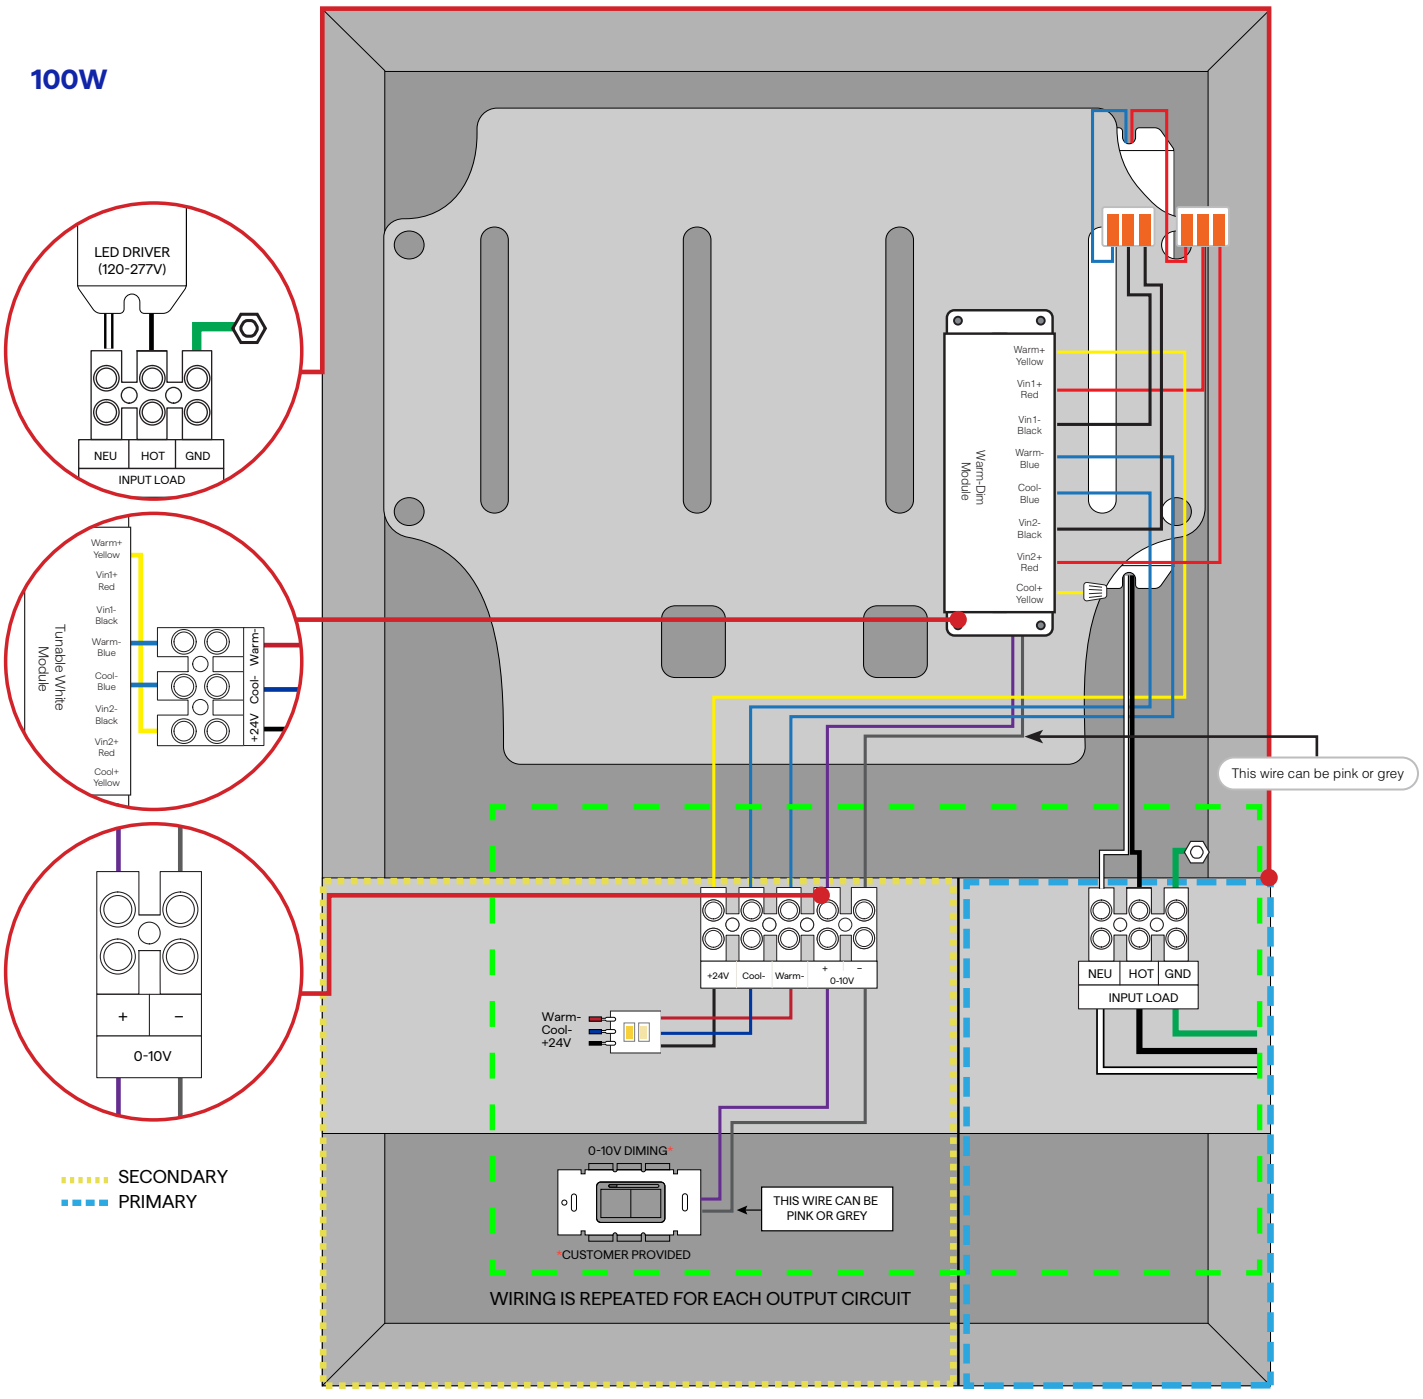

Only for wiring purposes

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QOM-eLED+WD

Installation Instructions

CSA Requirements

- Suitable for indoor and outdoor use
- This power supply must be installed according to the National Electric Code and local codes and ordinances and in accordance with applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear rubber shoes and work on a sturdy wooden or fiberglass ladder.
- This power supply is to be installed in a location where it is not likely to be contacted by non-electricians.
- To avoid a hazard to children, account for all parts and destroy all packaging materials.

QOM-eLED

INPUT VOLTAGE: ○ 120V - 277V

OUTPUT VOLTAGE: ○ 12V ○ 24V

CONTROL TYPE: ○ 0-10V ○ DMX ○ WD ○ TW ○ IA ○ DALI-DT6 ○ DALI-DT8 ○ ND

Model	Input Voltage (V)	Input Current (A)	Frequency	Nominal Output Voltage (VDC)	Nominal Output Wattage (W)
○○○ QOM-eLED-60	120/277	0.60/0.29	50/60	12	60
○○○ QOM-eLED-120	120/277	1.20/0.58	50/60	12	120
○○○ QOM-eLED-180	120/277	1.80/0.87	50/60	12	180
○○○○ QOM-eLED-100	120/277	0.95/0.40	50/60	24	100
○○○○ QOM-eLED-200	120/277	1.90/0.80	50/60	24	200
○○○○ QOM-eLED-300	120/277	2.85/1.20	50/60	24	300
○○○○ QOM-eLED-400	120/277	3.80/1.60	50/60	24	400

- Suitable for indoor or outdoor use
  CONVIENT POUR UNE UTILISATION INTÉRIEURE OU EXTÉRIEURE
- Wall mount only
  INSTALLATION MURALE SEULEMENT
- Suitable for mounting within 1.2m (4ft) of the ground
  PEUT ÊTRE INSTALLÉ À MOINS DE 1.2 M (4 PI) DU SOL
- Do not submerse
  NE PAS IMMERGER
- Suitable for under-cabinet mount
  CONVIENT POUR UN MONTAGE SOUS UNE ARMOIRE
- Suitable for wet locations
  CONVIENT AUX EMPLACEMENTS MOUILLÉ
- For supply connections use wire rated for at least 60°C
  POUR LES CONNEXIONS D'ALIMENTATION, UTILISEZ UN FIL ÉVALUÉ AU MOINS À 60°C
- Keep enclosure cover closed
  GARDEZ LE COUVERCLE DU BOÎTIER FERMÉ
- Read Installation Instructions Before Wiring
  LIRE LES INSTRUCTIONS D'INSTALLATION AVANT LE CÂBLAGE
- Class 2
  CLASSE 2

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

WARNING: RISK OF FIRE

IF INSTALLATION INVOLVES RUNNING WIRE THROUGH A BUILDING STRUCTURE, SPECIAL WIRING METHODS ARE NEEDED. CONSULT A QUALIFIED ELECTRICIAN.

RISQUE D'INCENDIE. SI L'INSTALLATION IMPLIQUE UN FIL DE COURANT À TRAVERS UNE STRUCTURE DE BÂTIMENT, DES MÉTHODES DE CÂBLAGE SPÉCIALES SONT NÉCESSAIRES. CONSULTEZ UN ÉLECTRICIEN QUALIFIÉ.

CAUTION:

FOR 12VDC OUTPUT VOLTAGE, DO NOT CONNECT MORE THAN ONE LUMINAIRE HEAD ASSEMBLIES OF 60 W MAXIMUM EACH TO ANY ONE OUTPUT. FOR 24VDC OUTPUT VOLTAGE, DO NOT CONNECT MORE THAN ONE LUMINAIRE HEAD ASSEMBLIES OF 100 W MAXIMUM EACH TO ANY ONE OUTPUT.

POUR UNE TENSION DE SORTIE DE 12 V CC, NE CONNECTEZ PAS PLUS D'UN ENSEMBLE DE TÊTES DE LUMINAIRE DE 60 W MAXIMUM CHACUN À UNE SORTIE. POUR UNE TENSION DE SORTIE DE 24 V CC, NE CONNECTEZ PAS PLUS D'UN ENSEMBLE DE TÊTES DE LUMINAIRE DE 100 W MAXIMUM CHACUN À UNE SORTIE.

QTL
MILFORD, CT U.S.A.
(203) 367-8777
www.QTL.lighting

Low Voltage Luminaires
Power Supply Center &
LED Landscape
Lighting System

CLASS: 3425-15
3425-95
3402-15
3402-95


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

MATERIAL RECYCLING

QTM/QOM-eLED

You may be done with your products, but chances are they still have more to give. Follow these instructions to break down and sort recyclable components. Check with local recycling collection to ensure they accept the materials listed below.

Additionally, Q-Tran offers a Takeback Program. Contact factory for information.

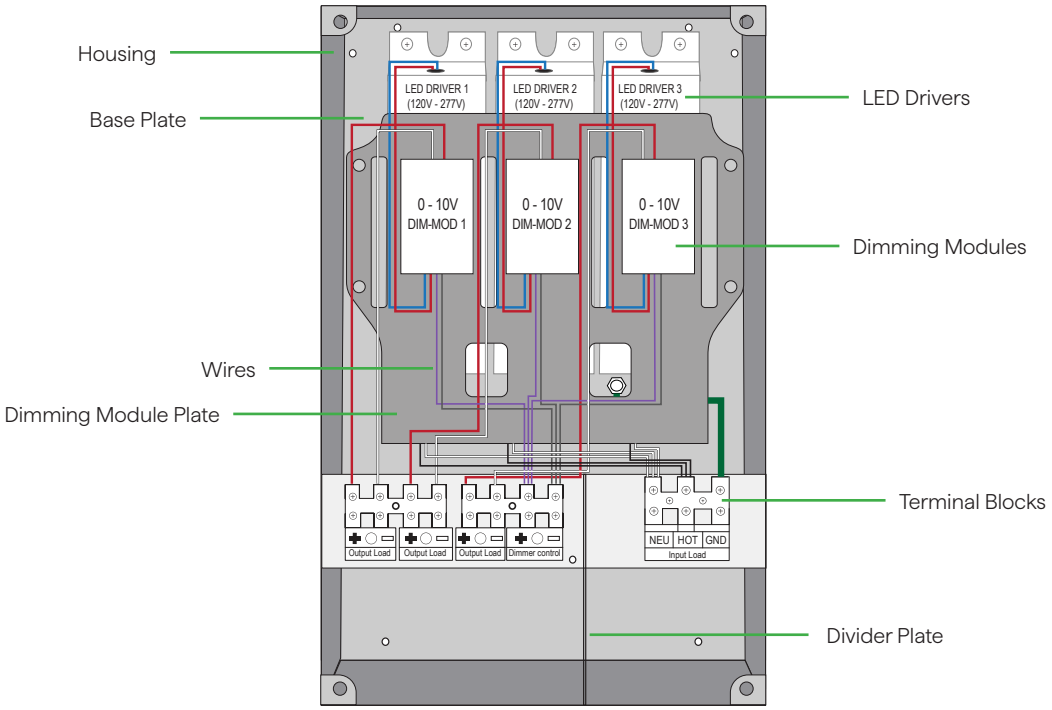

QTM-eLED shown

7

Terminal Blocks

E

LED Drivers
Dimming Modules
Wires

40

Housing
Base Plate
Dimming Module Plate
Divider Plate

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting