
QTM-eLED+0-10V-AWN

12V or 24V DC Power Supply - 60W-300W

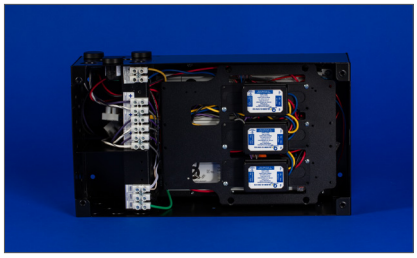

- Delivers superior performance with its 100W constant voltage LED drivers
- Incorporates a factory-installed Lutron Athena Wireless Nodes, which streamlines installation time and allows for simple programming using the Athena iOS or Android app
- Using radio frequency, it connects seamlessly to Lutron wall controls, keypads, and sensors over a mesh network, providing an efficient lighting control solution
- Can be recess or surface mounted
- See QTM-eLED+0-10V for power supply without Athena Nodes

1 PRODUCT	2 WATTAGE	3 CONTROL	4 PRIMARY VOLTAGE	5 SECONDARY VOLTAGE	6 COLOR
QTM-eLED			UNV		

Sample Part Number: **QTM-eLED-200W-0-10V-AWN-2-UNV-24VDC-WH**

1 PRODUCT

QTM-eLED

AWN-1,2,3 is the quantity of nodes mounted in the QTM enclosure. Multiple Athena nodes allow for multiple control zones in one QTM enclosure.

AWN-3 is available for surface mount installation only.

2 WATTAGE	3 CONTROL	4 PRIMARY VOLTAGE	5 SECONDARY VOLTAGE
100W	0-10V-AWN-1	UNV Universal	24VDC
200W	0-10V-AWN-1 0-10V-AWN-2		
300W	0-10V-AWN-1 0-10V-AWN-2 0-10V-AWN-3		
60W	0-10V-AWN-1	UNV Universal	12VDC
120W	0-10V-AWN-1 0-10V-AWN-2		
180W	0-10V-AWN-1 0-10V-AWN-2 0-10V-AWN-3		

6 COLOR

WH	White (Standard)
BK	Black Powder Coat Finish

COMPATIBLE LEDS

STATIC WHITE

SW24/1.5-4.0 SW-DR24/1.5-4.0 SHLD-SW24/1.5-4.0 SW-SCOB24/1.5-4.0	✓
SW24/5.0, SW-HE, SW-HE+ SW-DR24/5.0, SW-HE-DR SHLD-SW24/5.0, SHLD-SW-HE SW-SCOB24/5.0	✓
SW-SD24/1.0-4.0	✓
SW-SD24/6.0	✓
SW-IA	
SW-XT	✓

OTHER

DW-HE Tunable Applications	
DW-HE Warm Dim Applications	
WD	✓
SC	✓
RGB	
RGBW, RGBW-HE	

SHEETS

Q-SHEETS SW	✓
Q-SHEETS DW Tunable Applications	
Q-SHEETS DW Warm Dim Applications	
Q-SHEETS RGB	
Q-SHEETS RGBW	

MICRO 5

MICRO 5 SW	✓
MICRO 5 DW Tunable Applications	
MICRO 5 DW Warm Dim Applications	
MICRO 5 RGB	

PRODUCT INFORMATION

- Limited output voltage and current plus isolation for safe operation
- Dimmable to 0.1% with Lutron Athena System
- Fully potted driver(s) for moisture resistance
- Suitable for dry and damp locations
- Suitable for surface or recessed mounting
- Primary voltage - universal (120-277V)
- Wide operating temperature range: -40˚F to 104˚F
- Fits up to (3): 60W 12VDC or (3):100W 24VDC driver(s) and 0-10V dimming module(s) in the same housing
- 5-year warranty
- Driver has Class A sound rating
- Class 2 output
- CSA #239924
- Low Voltage Lighting Systems
  - CSA class 3425-15 and class 3425-95
  - CSA standard C22.2 No. 250.0-08 - Luminaires
  - ANSI/ UL standard 2108 - Low voltage lighting systems
  - CSA standard C22.2 No 250.13-14 - Light emitting diode (LED equipment for lighting applications
  - ANSI/ UL standard8750 - Light emitting diode (LED) equipment for use in lighting products

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QTM-eLED+0-10V-AWN

12V or 24V DC Power Supply - 60W-300W

VOLTAGE DROP CHART

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved

VOLTAGE DROP — 24V

Distance from PS for 1% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	15	192	121	76	48	30	19	12	7	5
24	30	96	60	38	24	15	9	6	4	2
24	45	64	40	25	16	10	6	4	2	2
24	60	48	30	19	12	8	5	3	2	1
24	80	36	23	14	9	6	4	2	1	1
24	96	30	19	12	7	5	3	2	1	1

Distance from PS for 3% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	15	577	362	228	143	90	57	36	22	14
24	30	288	181	114	72	45	28	18	11	7
24	45	192	121	76	48	30	19	12	7	5
24	60	144	91	57	36	23	14	9	6	4
24	80	108	68	43	27	17	11	7	4	3
24	96	90	57	36	22	14	9	6	4	2

Distance from PS for 5% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	15	961	604	380	239	150	95	59	37	24
24	30	480	302	190	120	75	47	30	19	12
24	45	320	201	127	80	50	32	20	12	8
24	60	240	151	95	60	38	24	15	9	6
24	80	180	113	71	45	28	18	11	7	4
24	96	150	94	59	37	23	15	9	6	4

VOLTAGE DROP — 12V

Distance from PS for 1% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
12	15	48	30	19	12	8	5	3	2	1
12	30	24	15	10	6	4	2	1	1	1
12	45	16	10	6	4	3	2	1	1	
12	60	12	8	5	3	2	1	1		

Distance from PS for 3% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
12	15	144	91	57	36	23	14	9	6	4
12	30	72	45	29	18	11	7	4	3	2
12	45	48	30	19	12	8	5	3	2	1
12	60	36	23	14	9	6	4	2	1	1


Distance from PS for 5% Voltage Drop										
VDC	Load (W)	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
12	15	240	151	95	60	38	24	15	9	6
12	30	120	76	48	30	19	12	7	5	3
12	45	80	50	32	20	13	8	5	3	2
12	60	60	38	24	15	9	6	4	2	1


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


QTM-eLED+0-10V-AWN

12V or 24V DC Power Supply - 60W-300W

1 PRODUCT - DIMENSIONS

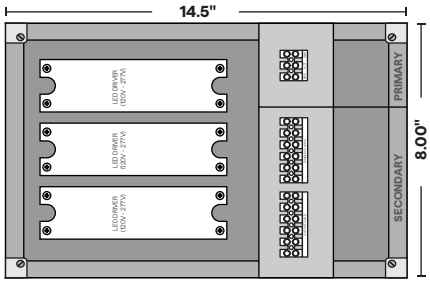



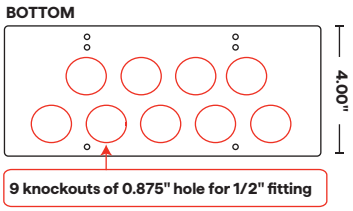

NOTE: 16 additional side knockouts

2 TECHNICAL INFORMATION

Wattage	Max Load (Watts)	Secondary Voltage	Max Prim Amps @ 120V	Max Prim Amps @ 277V
60W	1x60W	12VDC	0.60A	0.29A
120W	2x60W	12VDC	1.20A	0.58A
180W	3x60W	12VDC	1.80A	0.87A
100W	1x100W	24VDC	0.95A	0.40A
200W	2x100W	24VDC	1.90A	0.80A
300W	3x100W	24VDC	2.85A	1.20A

3 CONTROL

AWN-1: 1 Lutron Athena Node. 1 zone of control for 60-300W. The entire output is controlled as a single zone.
AWN-2: 2 Lutron Athena Nodes. 2 zones of control for 120-300W. Each of the two outputs are controlled as independent zones.
AWN-3: 3 Lutron Athena Nodes. 3 zones of control for 180W or 300W. Each of the three outputs are controlled as independent zones.
AWN-3: is available for surface mount installation only.

Total Wattage	AWN-1	AWN-2		AWN-3		
	Node 1	Node 1	Node 2	Node 1	Node 2	Node 3
60/100W	60/100W	-	-	-	-	-
120/200W	120/200W	60/100W	60/100W	-	-	-
180/300W	180/300W	120/200W	60/100W	60/100W	60/100W	60/100W

HOUSING

- 18 gauge welded steel enclosure: 14.5"W x 8.00"H x 4.00"D
- Door: 15.5"W x 9.00"H
- Knockouts: 25
- Built-in support bracket incorporated to secure housing for surface mounting

LUTRON ATHENA NODE

- Compatibility with Lutron Athena System
- Enables wireless 0-10V dimming
- Each node controlled as a single zone, use multiple nodes to create multiple zones
- Each Athena wireless node must be installed within 25' of two or more Athena wireless nodes for robust Athena control system connection
- Must be used as part of a Lutron Athena control System

HOUSING

- Rated for surface mount or recessed use
- Fully rated to operate low voltage load at listed wattage (No derating required)
- Voltage regulation to 2% or less of rated output voltage
- The ability to be dimmed using 0-10V dimming
- Universal input range of 120-277 Vrms
- Low Voltage Lighting Systems
  - CSA Class 3425-15 and Class 3425-95
  - Short circuit protection (SCP)
  - Over voltage protection (OVP)
  - Over current protection (OCP)
  - Live tested by the manufacturer to ensure proper operation
  - Manufacturer offers a minimum of 5-year warranty
- Terminal blocks are made of tin plated copper with a voltage rating of 300V and a current rating of 40A

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QTM-eLED+0-10V-AWN

12V or 24V DC Power Supply - 60W-300W

SPECIFICATIONS

Input	12VDC			24VDC		
Input Voltage (Vrms)	120	230	277	120	230	277
Input Current, max (Arms)	0.58	0.30	0.30	0.98	0.51	0.42
Inrush Current, max* (Apk)	-	-	-	45	90	100
Input Frequency (Hz)	50/60			50/60		
Input Power (W)	70			177		

Output	12VDC	24VDC
Output Voltage, nom (V)	12	24
Output Current (A)	5.0	4.1
Output Power (Wmax)	60	100
Dimming 0-10V, max	2mA	

Environmental	Min	Nom	Max	Min	Nom	Max
THD (%)	-	-	20	-	-	20
PF (%)	0.90	-	-	0.90	-	-
Case Temp (°F)	-	-	90	-	-	90

*-200us event

PROTECTIONS

- Short Circuit Protection (SCP)
- Over Voltage Protection (OVP)
- Over Current Protection (OCP)
- Class 2 Output

6 COLOR


White (Standard)

Black Powder Coat Finish


COMPLIANCE

- EMI Spec
  - FCC 47 Part 15
  - EN61000-3-2
- CSA Certified
  - UL-2108
  - UL-8750
  - CSA C22.2 No 250.0-08
  - CSA C22.2 No 250.13-14


Efficiency, 12VDC

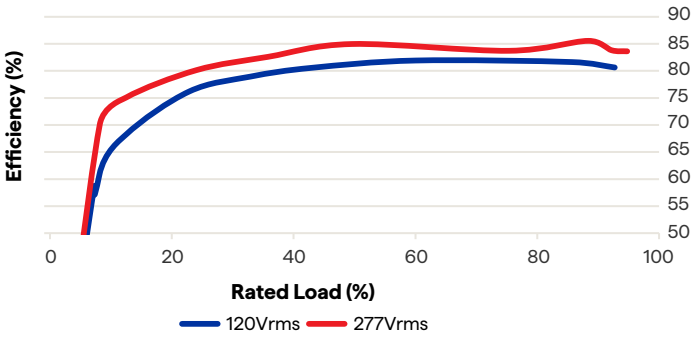


Vout vs. Iout, 12VDC

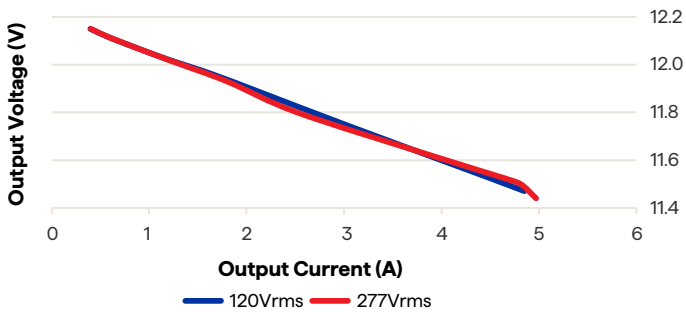

Efficiency, 24VDC

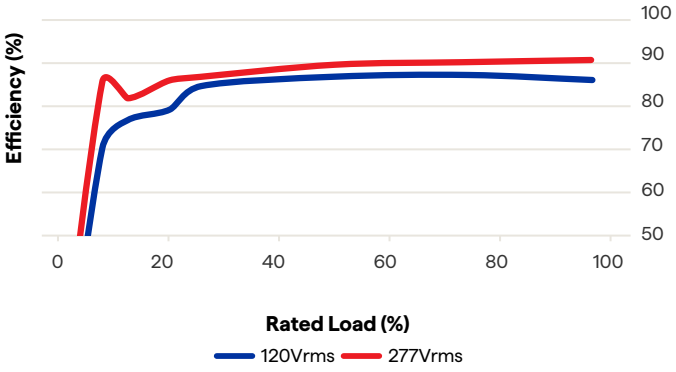

Vout vs. Iout, 24VDC

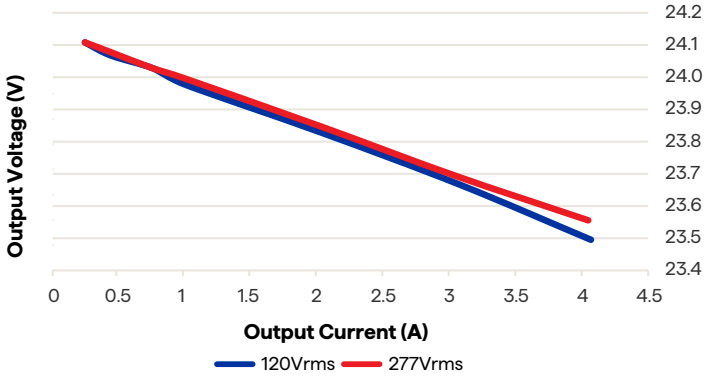


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-24-26

QTM-eLED+0-10V-AWN

12V or 24V DC Power Supply - 60W-300W


Life Time vs. Case Temperature

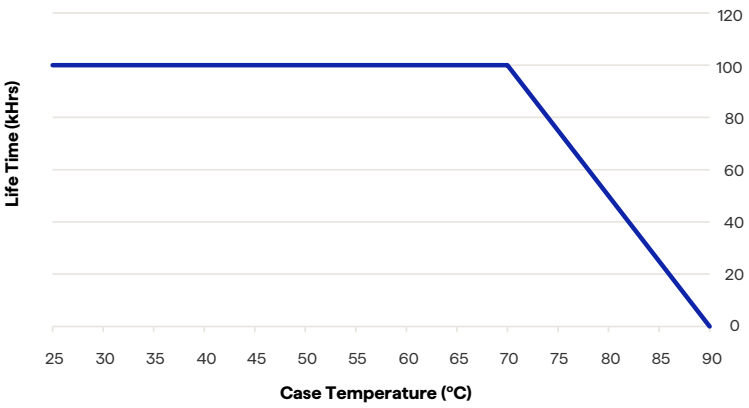

NODE AND CONDUIT ENTRY LOCATIONS

RECESSED MOUNT


AWN-1 AWN-2




ISO VIEW

SURFACE MOUNT

AWN-1 AWN-2 AWN-3

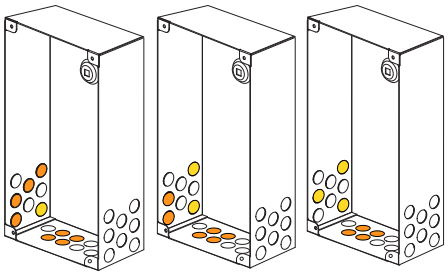

NOTE: AWN-3 is available for QTM-eLED+WD and QTM-eLED+0-10V only.

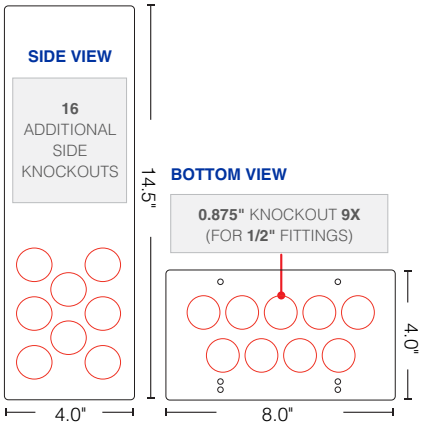

Conduit Entry Locations
Athena nodes must be installed on the secondary side of power supply center and require 1.0" of clearance in order to optimally function. Metal conduit must be 1.0" away from any node. Refer to the diagram above for recommendations for conduit entry into secondary compartment.

Lutron Athena Node
Mounted in the secondary wiring compartment only

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

QTM-eLED+0-10V-AWN

Installation Instructions

- **Must be installed by licensed electrician.**

WARNING

Risk of Fire / Electric Shock



Transformer should be installed by a Licensed electrician in accordance with the N.E.C. and all local codes in force.

RoHS COMPLIANT

C SP US

LOW VOLTAGE LIGHTING SYSTEM
CLASS: **3425-15**
3425-95

- Wear rubber shoes and work on a sturdy wooden or fiberglass ladder.
- This power supply must be installed according to the National Electric
- Code and local codes and ordinances.
- This power supply is to be installed and serviced only by an licensed electricians.
- This power supply is to be installed so that it is not likely to be contacted by people.
- To avoid a hazard to children, account for all parts and destroy all packaging materials.
- Do not install in wet locations.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


QTM-eLED+0-10V-AWN

Installation Instructions

Node And Conduit Entry Locations

RECESSED MOUNT


AWN-1 AWN-2




ISO VIEW

SURFACE MOUNT

AWN-1 AWN-2 AWN-3

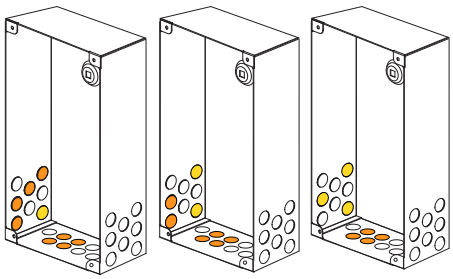

NOTE: AWN-3 is available for QTM-eLED+WD and QTM-eLED+0-10V only.

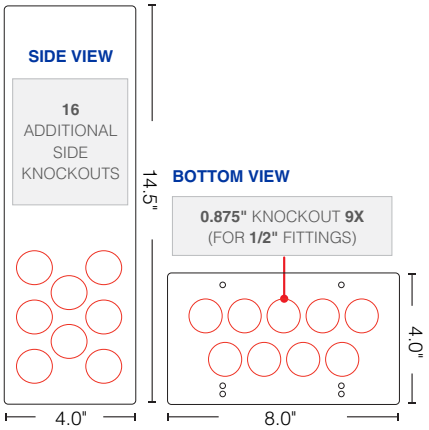


Conduit Entry Locations

Athena nodes must be installed on the secondary side of power supply center and require 1.0" of clearance in order to optimally function. Metal conduit must be 1.0" away from any node. Refer to the diagram above for recommendations for conduit entry into secondary compartment.


Lutron Athena Node

Mounted in the secondary wiring compartment only


Mounting Options

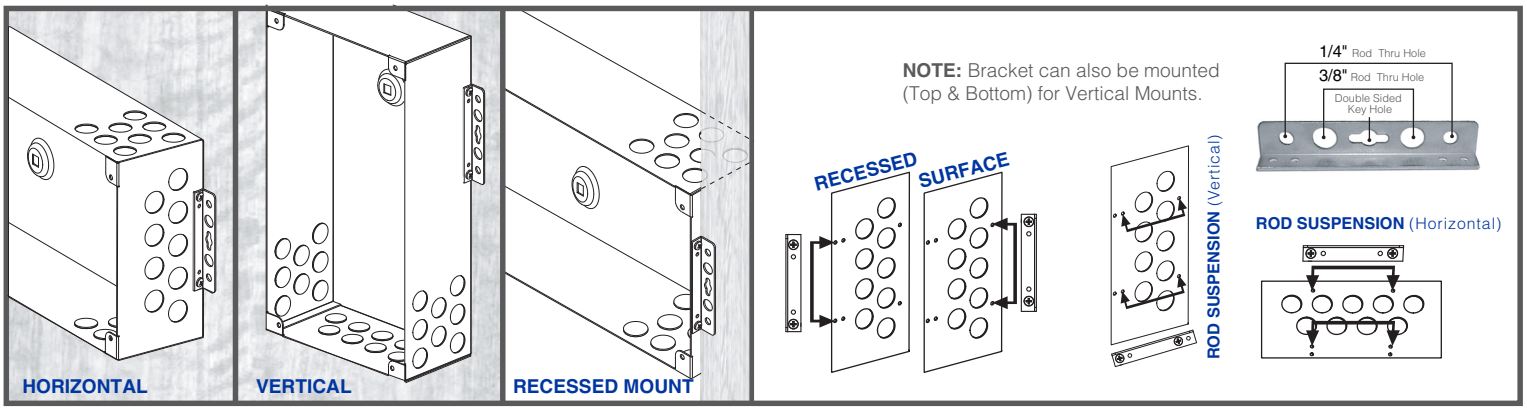

SURFACE SPACING

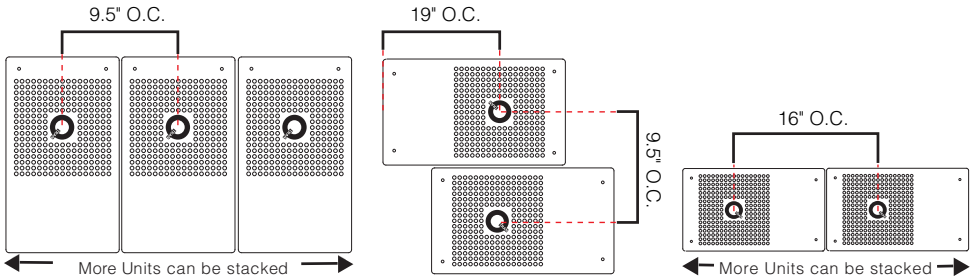


SURFACE STACKING




ROD SUSPENSION

Vertical



Plenum Door Required

Horizontal



NOTE: Rods not included.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | QTLlighting

Specification subject to change. Rev-04-01-24


QTM-eLED+0-10V-AWN

Installation Instructions

Driver with Lutron Athena Node

QTM-eLED-300W+0-10V-AWN-3

: for interior

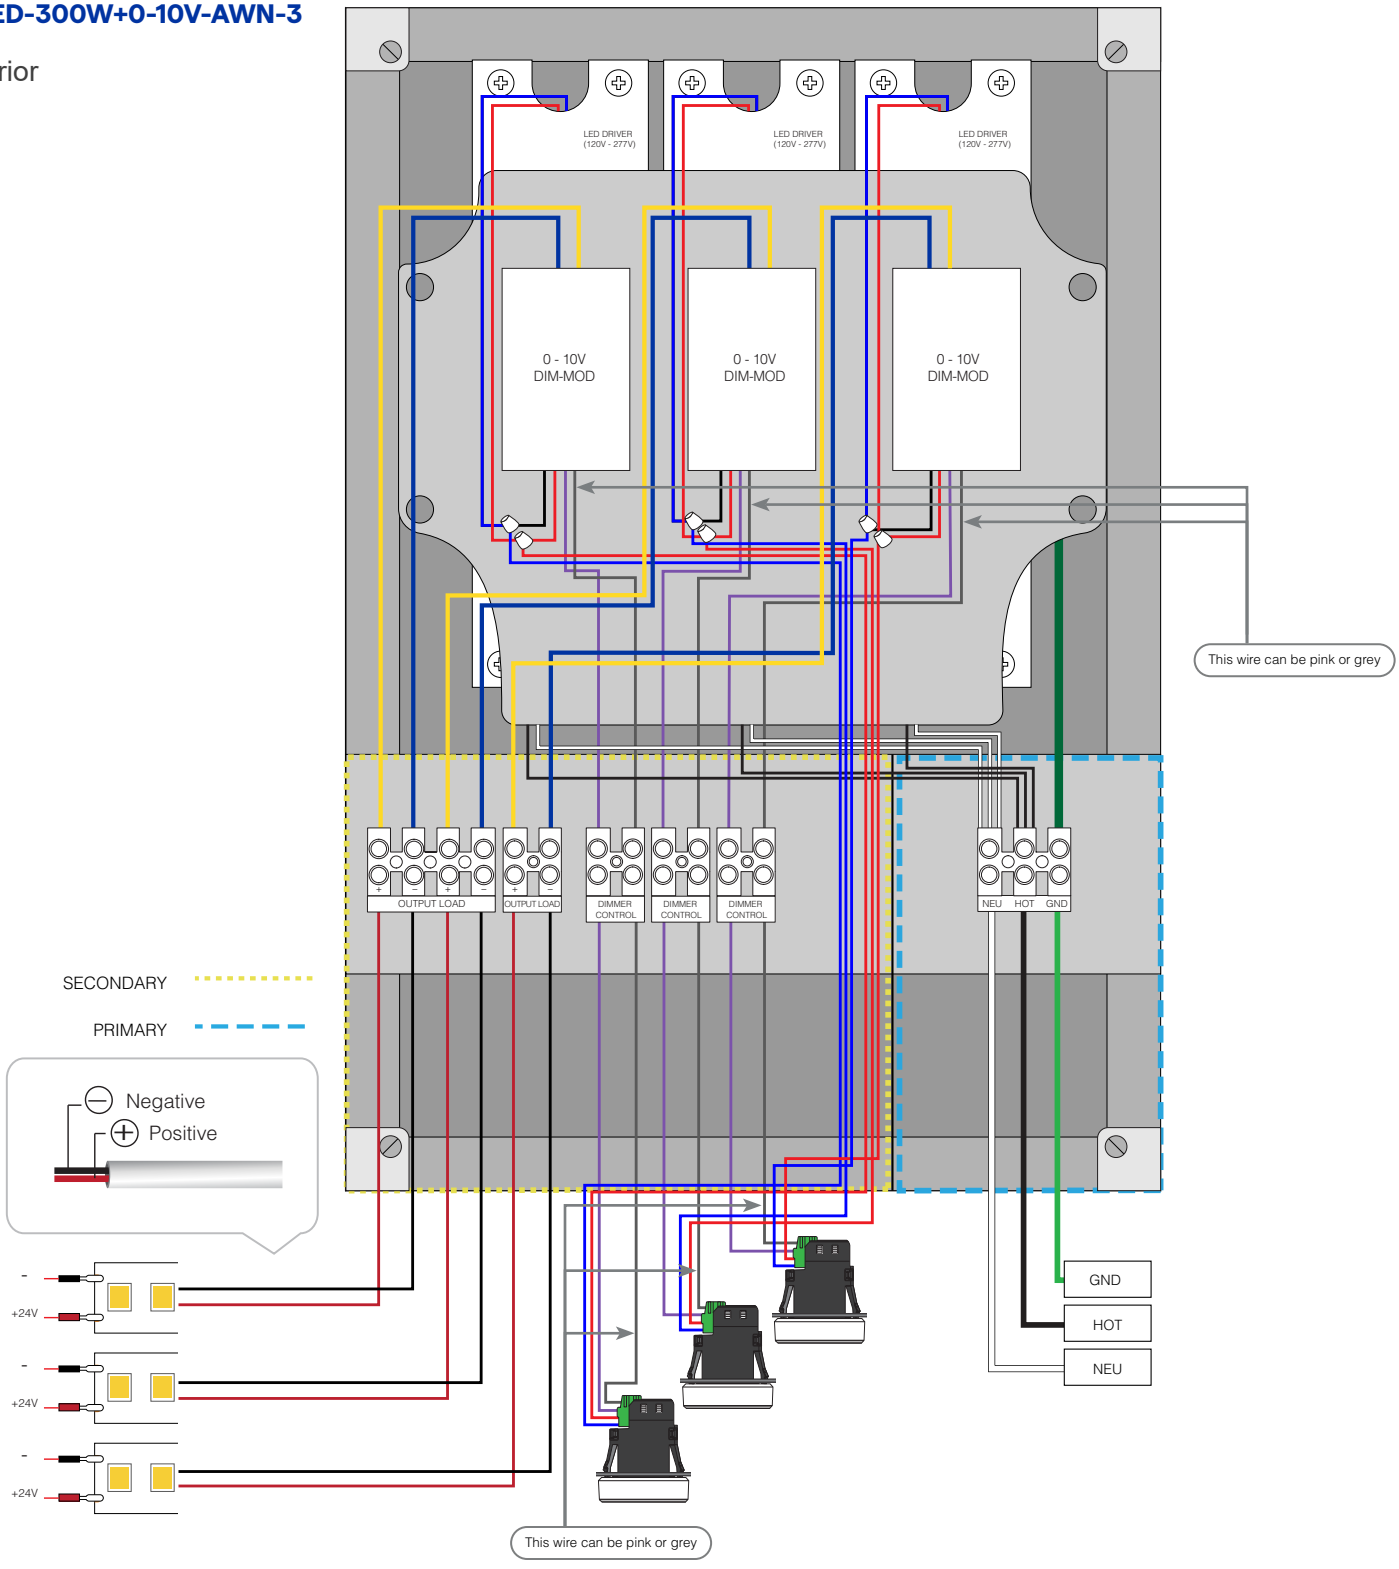

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | QTL.lighting

Specification subject to change. Rev-04-01-24

QTM-eLED+0-10V-AWN

Installation Instructions

CSA Requirements

- Suitable for Indoor use
- This power supply must be installed according to the National Electric Code and local codes and ordinances and in accordance with applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear rubber shoes and work on a sturdy wooden or fiberglass ladder.
- This power supply is to be installed in a location where it is not likely to be contacted by non-electricians.
- To avoid a hazard to children, account for all parts and destroy all packaging materials.

QTM-eLED

	Model	Input Voltage (V)	Input Current (A)	Frequency	Nominal Output Voltage (VDC)	Nominal Output Wattage (W)
		INPUT VOLTAGE			OUTPUT VOLTAGE	
		◯ 120V - 277V			◯ 12V ◯ 24V	
◯	QTM-eLED-60	120/277	0.60/0.29	50/60	12	60
◯	QTM-eLED-120	120/277	1.20/0.58	50/60	12	120
◯	QTM-eLED-180	120/277	1.80/0.87	50/60	12	180
◯	QTM-eLED-100	120/277	0.95/0.40	50/60	24	100
◯	QTM-eLED-200	120/277	1.90/0.80	50/60	24	200
◯	QTM-eLED-300	120/277	2.85/1.20	50/60	24	300

CONTROL TYPE

- ◯ 0-10V-AWN
- ◯ WD-AWN
- ◯ TW-AWN
- ◯ DALI-DT6-AWN
- ◯ DALI-DT8-AWN

- Type IC recessed, inherently protected
  TYPE IC ENCASTRE, PROTECTION INHÉRENTE
- For supply connections use wire rated for at least 60°C
  LES FILS D'ALIMENTATION 60°C MIN.
- Not for use with dimmers
  NE PAS UTILISER AVEC DES GRADATEURS
- Suitable for damp locations
  CONVIENT AUX EMPLACEMENTS HUMIDES
- Wall mount only
  MONTAGE MURAL UNIQUEMENT
- 50/60 Cycle
  CYCLE 50/60
- Class 2
  CLASSE 2

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

QTL
MILFORD, CT U.S.A.
(203) 367-8777
www.QTLlighting

LOW VOLTAGE LIGHTING SYSTEM
CLASS: 3425 - 15
3425 - 95


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | QTLlighting

MATERIAL RECYCLING

QTM/QOM-eLED

You may be done with your products, but chances are they still have more to give. Follow these instructions to break down and sort recyclable components. Check with local recycling collection to ensure they accept the materials listed below.

Additionally, Q-Tran offers a Takeback Program. Contact factory for information.

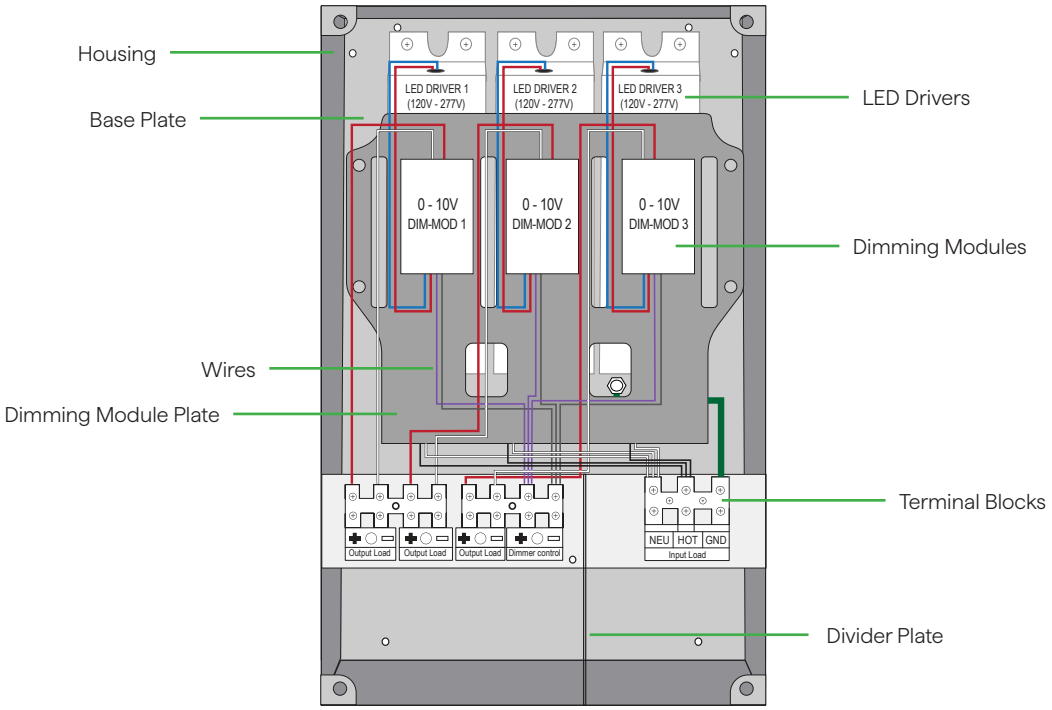

QTM-eLED shown

7

Terminal Blocks

E

LED Drivers
Dimming Modules
Wires

40

Housing
Base Plate
Dimming Module Plate
Divider Plate

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting