
SNAP-ON LOUVERS - TORQ

Accessories - Linear Fixtures

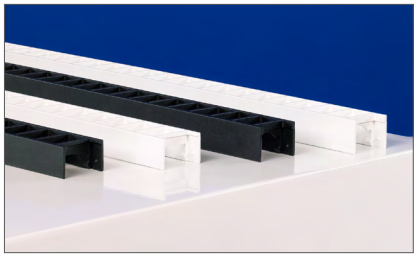

- Control glare from end- or side-view angles without compromising optical output or efficiency
- Press-and-snap quickly into existing TORQ linear fixtures
- Install in the field—without tools or timeline disruptions
- Mitigate glare and increase comfort —without modifying fixtures
- Ideal for workspaces, high-end retail or architectural wall details
- Designed for use with fixtures featuring flat, optical, encapsulated and asymmetric lenses
- Available in black or white finishes to support discreet or contrast-driven designs

1 PRODUCT	2 COLOR	3 QUANTITY OF KITS

Sample Part Number: **TORQ-L1-FLAT-KIT-WH-12**

1 PRODUCT

TORQ-L1-FLAT-KIT	Plastic Snap-On Louver Kit for TORQ-Flat & TORQ-Encapsulated
TORQ-L1-OPTICS-KIT	Plastic Snap-On Louver Kit for TORQ-Optics

2 COLOR

WH	White
BK	Black


3 QUANTITY OF KITS


Kits include 12" louver, connector, and a pair of gaskets. Louvers are field cuttable.

1 PRODUCT - DIMENSIONS

For additional dimensions and lumen multiplier information, refer to the fixture spec sheet


TORQ-L1-FLAT-KIT

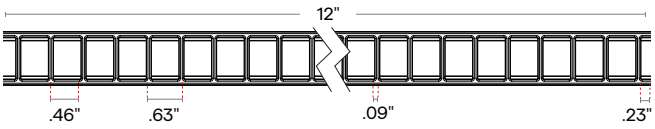




TORQ-L1-OPTICS-KIT

When using the 40DEG option with a side feed input/output, routing will be necessary on the plastic louver to ensure unobstructed wire exits

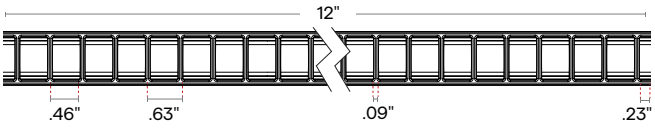



5 year warranty | Data subject to change, all data has +/- 5% tolerance

© 2025 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


Specification subject to change. Rev-11-25-25

SNAP-ON LOUVER

Installation Instructions


INSTALL METHOD: **LOUVER**

Louvers can be snapped onto the fixture either before or after it is mounted to the surface using the provided mounting clip.

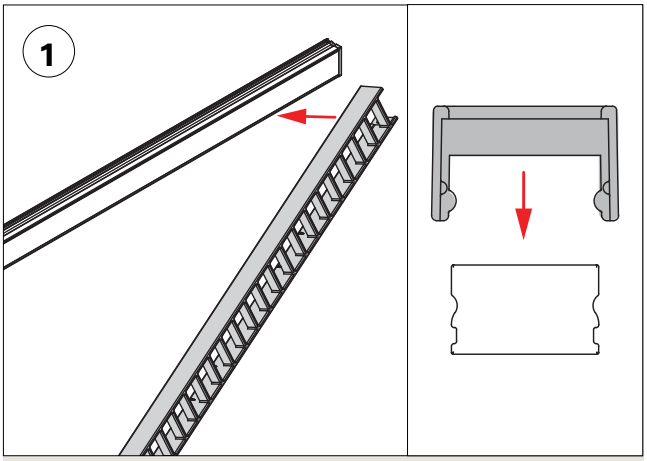


Snap the louver onto the fixture.

NOTE: Tilting the louver and snapping on one end first, then pressing down on the remaining length makes for an easier install.

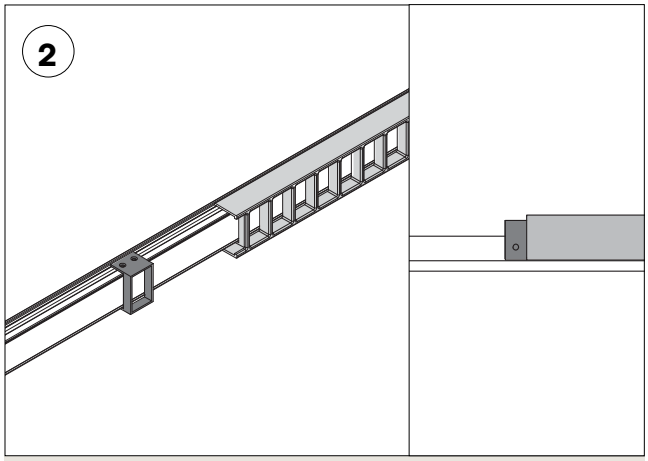

Snap the louver connector onto the fixture, then slide it into the end of the mounted louver.

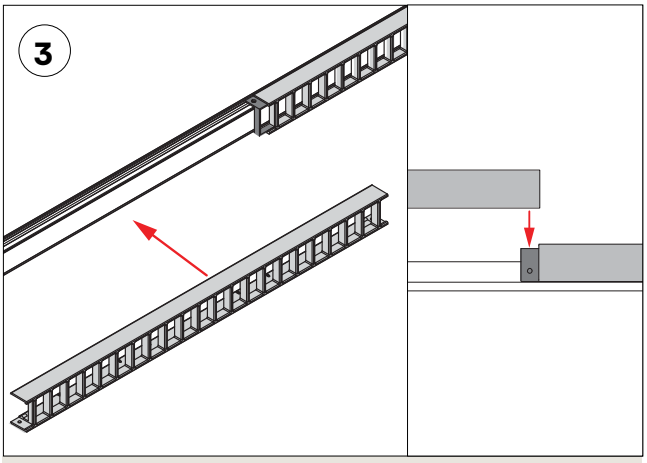

Snap the next louver onto the fixture and over the connector, the louver can also be slid into the connector.

NOTE: These plastic louvers are field-cuttable. We recommend trimming the last segment as needed and positioning the cut end at the fixture's edge for a clean finish.

© 2025 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


SNAP-ON LOUVER

Installation Instructions


INSTALL METHOD: **LOUVER-GASKET**

Louvers can be snapped onto the fixture either before or after it is mounted to the surface using the provided mounting clip.

- When the fixture is mounted vertically, install a pair of gaskets on the inner side of the lowest louver to act as a stopper.

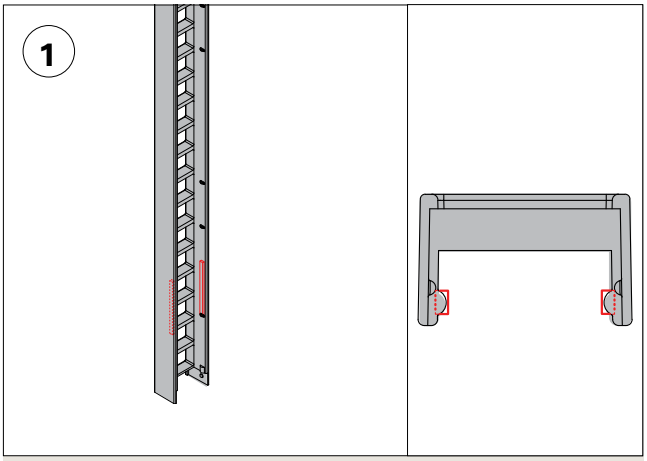

Remove the adhesive backing on the gasket, then place one on each side of the louver's inner walls, towards the bottom edge.

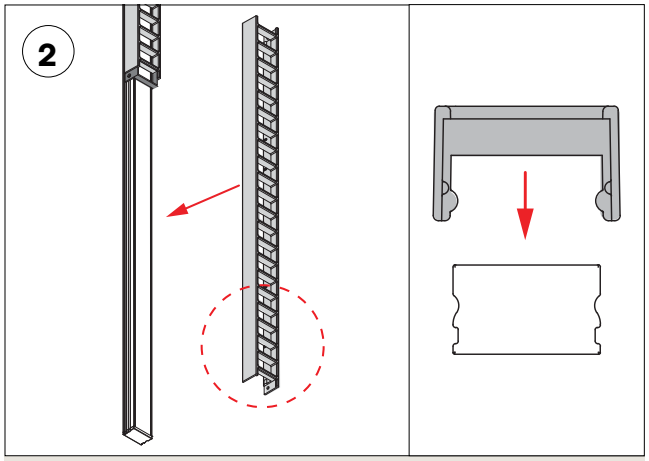

Snap last louver onto the fixture (should be lowest louver on fixture, when mounted vertically).

© 2025 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting