

VERS-DROP (10) RGB

24VDC Linear Fixtures - Surface & Recessed

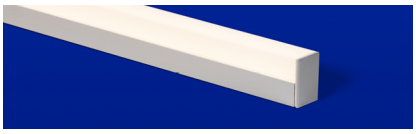



- Utilizes an extruded drop lens that sits proud of the fixture for maximum variations of LED sources
- The high-quality lens provides a three sided diffuse illumination
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look
- Mounting options include concealed clip or T-Bar clips
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
VERS-10-RGB	6.0	RGB			N/A

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **VERS-10-RGB-6.0-RGB-DRY-DF-N/A-P1-BW-BW-BK-CL2-CC-BK-48"-E**

1 PRODUCT

VERS-10-RGB

See following pages for compatible power supplies.

2 WATTS/FT

6.0 6.0W/ft

3 CCT

RGB

4 RATED

DRY IP20
DMP IP54
WET IP67

Can be suitable for exterior use. contact factory for more information

5 LENS

DF Diffused
PR Polar

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-04 for additional 25° lens option.

6 EXTERNAL LOUVER

N/A No Louver

7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed
S3 Left Side Feed
S4 Right Side Feed

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed
P3 Left Side Feed
P4 Right Side Feed

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 36")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 36")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH White
BK Black

11 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

12 MOUNTING

CC Concealed Clip
TBC-03 9/16" Flat TB-Grid
TBC-04 15/16" Flat or Tegular TB-Grid
TBC-05 9/16" Tegular TB-Grid

13 FINISH

ST Satin
BK Black
BZ Bronze
WH White
CU Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-03-25-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


VERS-DROP (10) RGB

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip



Profile with TBC-03



Profile with TBC-04



Profile with TBC-05

2 DELIVERED LUMENS

[Calculated L70 = 52000 hrs]
Tested with VERS-10-RGB-6.0-RGB-DRY

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
PR	68	628	162	522	42	469	255
DF	64	628	154	522	40	469	244

5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

6.0W/ft | Green Diffused lens





TEMPERATURE RATINGS

		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	105°F
DMP	Ambient Operating Temp - Surface	-13°F	105°F
WET	Ambient Operating Temp - Surface	-13°F	100°F


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

VERS-DROP (10) RGB


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

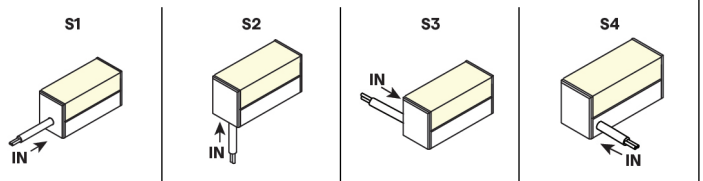

PASS THROUGH (Input/Output)

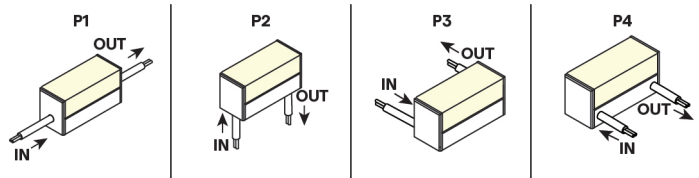


CONFIGURATION OPTIONS

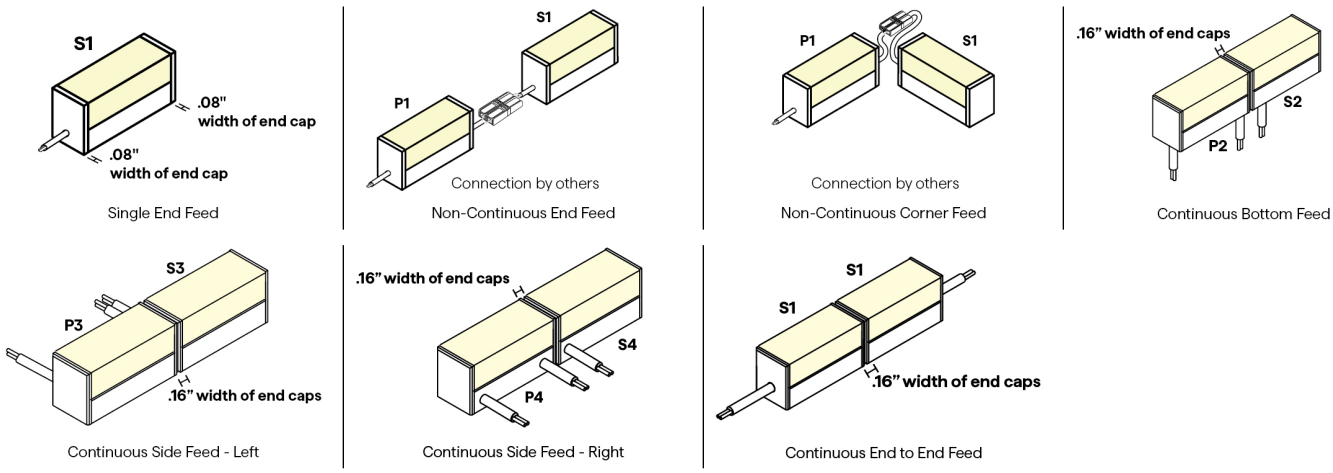

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

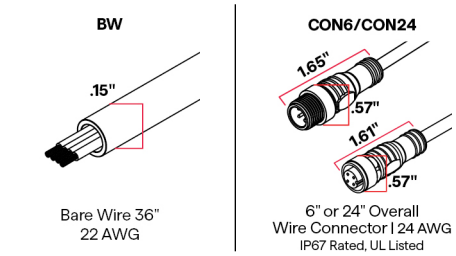

10 WIRE COLOR




© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-DROP (10) RGB

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Satin

Black


Bronze

White

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

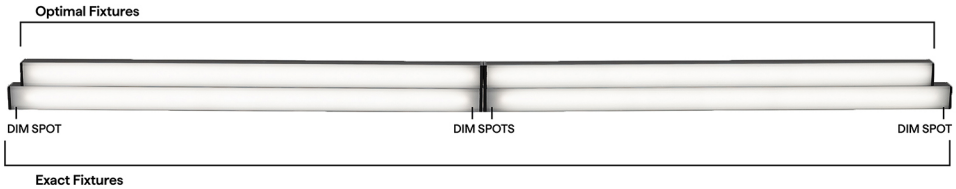


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-DROP (10) RGB





24VDC Linear Fixtures - Surface & Recessed

RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH





Requested Nominal Length	S1 & S2 		P1 & P2 		S3 & S4 		P3 & P4 	
12"	10.59"		10.94"		10.49"		10.59"	
13"	12.59"		12.94"		12.49"		12.59"	
14"	12.59"		12.94"		12.49"		12.59"	
15"	14.59"		14.94"		14.49"		14.59"	
16"	14.59"		14.94"		14.49"		14.59"	
17"	16.59"		16.94"		16.49"		16.59"	
18"	16.59"		16.94"		16.49"		16.59"	
19"	18.59"		18.94"		18.49"		18.59"	
20"	18.59"		18.94"		18.49"		18.59"	
21"	20.59"		20.94"		20.49"		20.59"	
22"	20.59"		20.94"		20.49"		20.59"	
23"	22.59"		22.94"		22.49"		22.59"	
24"	22.59"		22.94"		22.49"		22.59"	
36"	34.59"		34.94"		34.49"		34.59"	
48"	46.59"		46.94"		46.49"		46.59"	
60"	58.59"		58.94"		58.49"		58.59"	
72"	70.59"		70.94"		70.49"		70.59"	
84"	82.59"		82.94"		82.49"		82.59"	
96"	94.59"		94.94"		94.49"		94.59"	

RGB WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 		P1 & P2 		S3 & S4 		P3 & P4 	
12"	10.74"		11.14"		10.64"		10.84"	
13"	12.74"		11.14"		12.64"		12.84"	
14"	12.74"		13.14"		12.64"		12.84"	
15"	14.74"		13.14"		14.64"		14.84"	
16"	14.74"		15.14"		14.64"		14.84"	
17"	16.74"		15.14"		16.64"		16.84"	
18"	16.74"		17.14"		16.64"		16.84"	
19"	18.74"		17.14"		18.64"		18.84"	
20"	18.74"		19.14"		18.64"		18.84"	
21"	20.74"		19.14"		20.64"		20.84"	
22"	20.74"		21.14"		20.64"		20.84"	
23"	22.74"		21.14"		22.64"		22.84"	
24"	22.74"		23.14"		22.64"		22.84"	
36"	34.74"		35.14"		34.64"		34.84"	
48"	46.74"		47.14"		46.64"		46.84"	
60"	58.74"		59.14"		58.64"		58.84"	
72"	70.74"		71.14"		70.64"		70.84"	
84"	82.74"		83.14"		82.64"		82.84"	
96"	94.74"		95.14"		94.64"		94.84"	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-DROP (10) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

NL-LARGE



L Mounting Bracket


SD-L-LARGE



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

VERS-DROP (10) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved


VERS

Linear Fixture Installation Instructions

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Warranty only valid with QTL power supplies
- Surface mount or recessed in millwork
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

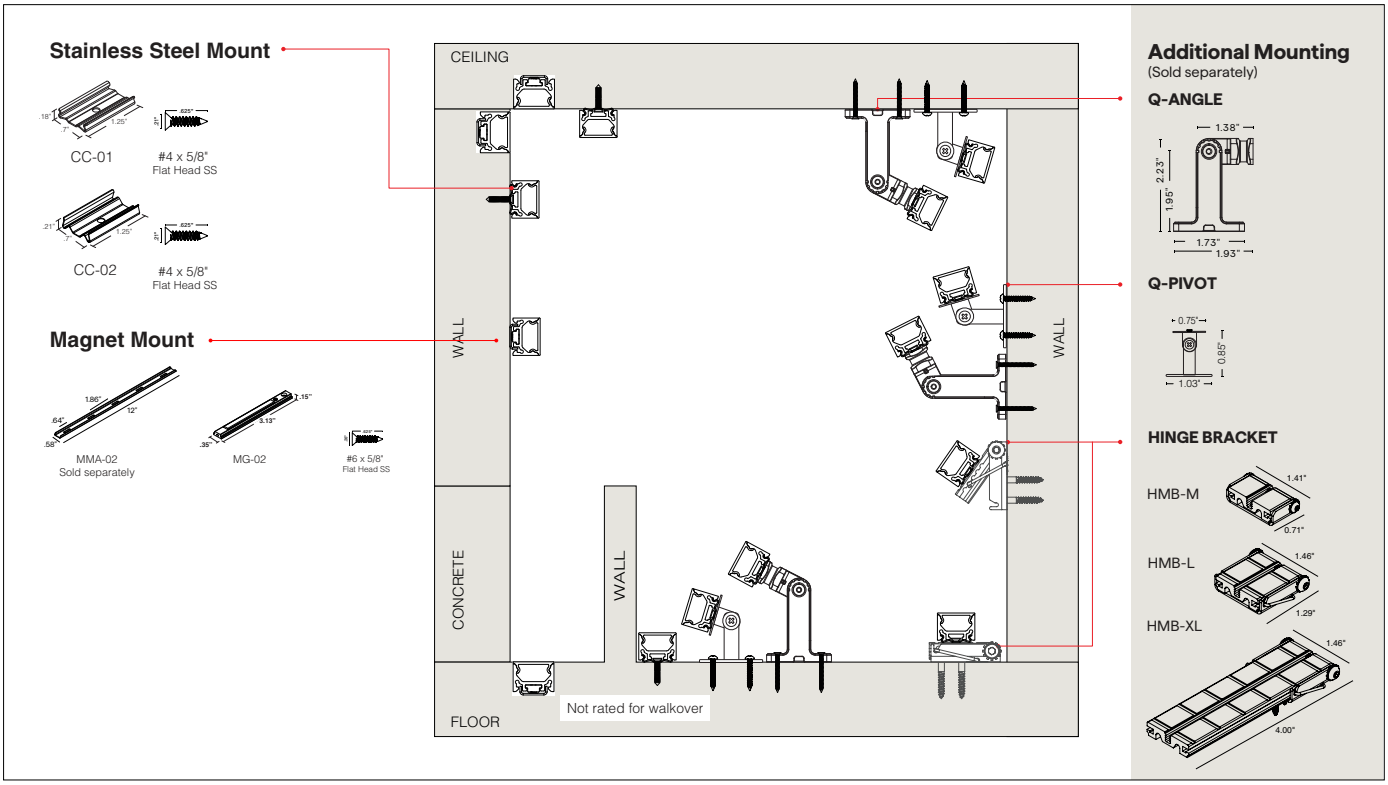

Surface Mounting Method

- Screw Mount (page 7)
- T-Bar Clip Mount (page 8)
- Magnet Mount (page 9)


Recessed Mounting Method

- Magnet Mount : Millwork (page 10)


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS


Linear Fixture Installation Instructions




VERS-PROUD (01)




VERS-FLUSH (02)




VERS-CLEAR (03)




VERS-GRAZER (04)




VERS-OPTICS (05)




VERS-ENCAPSULATED (06)




VERS-LOUVER (07)




VERS-INSERT (08)



VERS-ASYMMETRIC (09)





VERS-DROP (10)









VERS-NANO LOUVER (11)

COMPONENTS & HARDWARE

Alternate screw lengths can be used in installation as long as the screw diameter size is consistent with the included screw diameter size

CONCEALED CLIP	LOUVER CONCEALED CLIP	MAGNET CLIP
 CC-01	 CC-02	 MG-02
Included: Flat Head Screw #4x5/8"	Included: Flat Head Screw #4x5/8"	Included: Flat Head Screw #6x5/8"
• 2 clips provided for 4' or less; 4 clips provided for greater than 4'	• 2 clips provided for 4' or less; 4 clips provided for greater than 4'	• One magnet clip per foot

PLASTIC T-BAR CLIP		
 TBC-03 9/16" Flat TB-grid clip	 TBC-04 15/16" Flat or Tegular TB-grid clip	 TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid clip with External Louver
Included: .625" / M2.5 x 4mm set screw	Included: .625" / M2.5 x 4mm set screw	Included: .625" / M2.5 x 4mm set screw
• 2 clips provided for 12", 1 clip provided for each additional 12" or less length	• 2 clips provided for 12", 1 clip provided for each additional 12" or less length	• 2 clips provided for 12", 1 clip provided for each additional 12" or less length
 TBC-06 9/16" Tegular TB-Grid clip, with External Louver	 TBC-07 15/16" Flat TB-Grid clip with External Louver	 TBC-08 15/16" Tegular TB-Grid clip with External Louver
Included: .625" / M2.5 x 4mm set screw	Included: .625" / M2.5 x 4mm set screw	Included: .625" / M2.5 x 4mm set screw
• 2 clips provided for 12", 1 clip provided for each additional 12" or less length	• 2 clips provided for 12", 1 clip provided for each additional 12" or less length	• 2 clips provided for 12", 1 clip provided for each additional 12" or less length


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS

Linear Fixture Installation Instructions

ACCESSORIES SOLD SEPARATELY

MAGNET MOUNT ACCESSORY; sold individually



MMA-02

Included

Flat Head Screw #6x5/8"

- MMA-02 comes in 12" pieces; use at least one clip per MMA-02 accessory
- MMA-02 can be cut into smaller pieces, if desired

HINGE BRACKET; sold individually





Image shows HMB-M

HMB-M
HMB-L
HMB-XL

Included

- 3/4" long mount screw
- 1/4" #4 clip mount screw

Q-ANGLE; sold in pairs



Q-ANGLE

Included

- 2 SS 6-32 Fillister screws
- 2 SS 4-40 Flat head clip screws
- 4 SS #6x1.25" Flat head wood screws

Q-PIVOT; sold in pairs



Q-PIVOT

Included

- SS #4-40x3/16 Flat head screw
- 2 #4x3/4 Pan head screws


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS


Linear Fixture Installation Instructions

CONFIGURATION OPTIONS


VERS-FLAT




Single End Feed




Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous Side Feed - Left




Continuous Side Feed - Right




Continuous End to End Feed




*Continuous Bottom Feed



*Continuous Side Feed - Left




*Continuous Side Feed - Right




*Continuous End to End Feed


VERS-OPTICS




Single End Feed




Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left




Continuous Side Feed - Right




Continuous End to End Feed


VERS-DROP




Single End Feed




Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left



Continuous Side Feed - Right



Continuous End to End Feed

Review wire method to ensure clean installation prior to mounting extrusion.
*Only available with VERS-ENCAPSULATED (06)

NOTE: Additional wire methods include:
S1, S2, S3, S4: Connector/Wire Input only
P1, P2, P3, P4: Connector/Wire Input and Output


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS


Linear Fixture Installation Instructions

CONFIGURATION OPTIONS


VERS-ASYMMETRIC



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others


Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous Bottom Feed




Continuous Side Feed - Left




Continuous Side Feed - Left



Continuous Side Feed - Right



Continuous Side Feed - Right



Continuous End to End Feed


Review wire method to ensure clean installation prior to mounting extrusion.

NOTE: Additional wire methods include:
S1, S2, S3, S4: Connector/Wire Input only
P1, P2, P3, P4: Connector/Wire Input and Output


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

CONFIGURATION OPTIONS


VERS-NANO-LOUVER



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others


Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous Bottom Feed



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others

Non-Continuous Corner Feed



Continuous Bottom Feed



Continuous Bottom Feed


Review wire method to ensure clean installation prior to mounting finished Fixture.

NOTE: Additional wire methods include:
S1: Connector/Wire Input only
P1: Connector/Wire Input and Output


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **SCREW MOUNT**

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'
- Applies to both CC-01 & CC-02

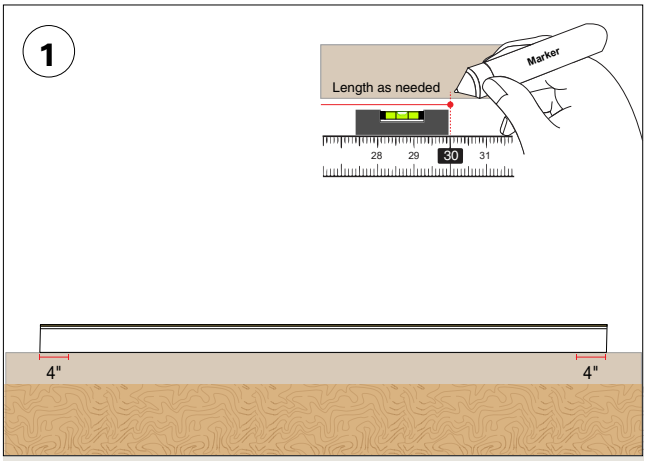

Determine the VERS fixture(s) location and positioning on desired surface; evenly distribute clips. Make any necessary reference markings to indicate where each clip is to be secured in place. Recommended every 24" - 30".

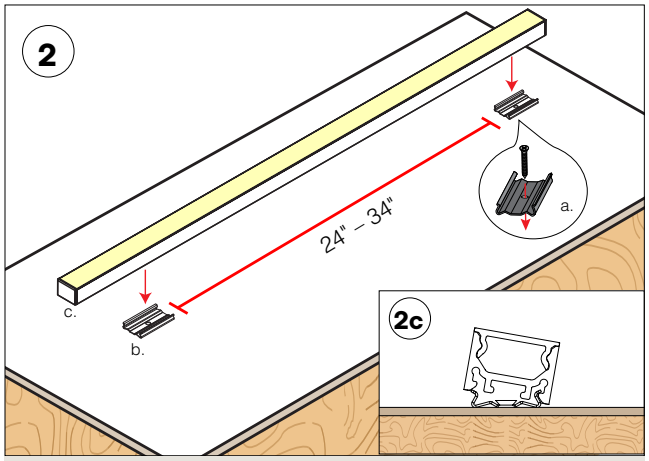


a. Secure clips using the #4 flat head hardware provided. The first and last clip should be placed 4" inward from each end of the fixture.

b. Ensure the screw head is flush with the clip's base.

c. Snap fixture onto clips. Make a secure connection with the concealed clip by tilting and snapping on.

NOTE: Flat head screw type is dependent on surface/application material. Alternative flat head screws may be required. Refer to the surface material manufacturer for suggested screw type.

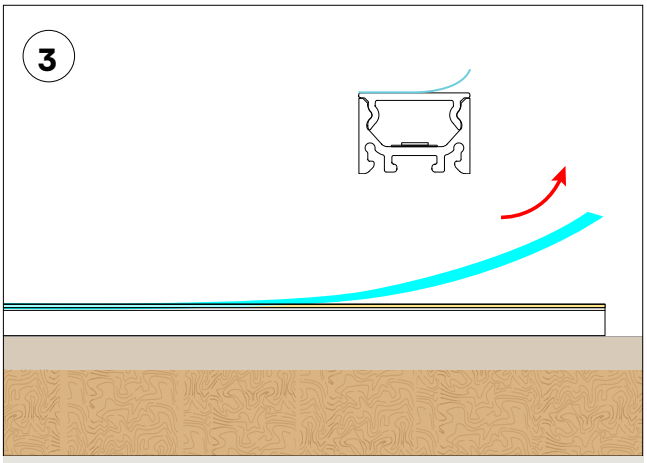


Remove protective film from the surface of the fixture's lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **PLASTIC T-BAR MOUNT**

- 2 clips provided for 12", 1 clip provided for each additional 12" or less length

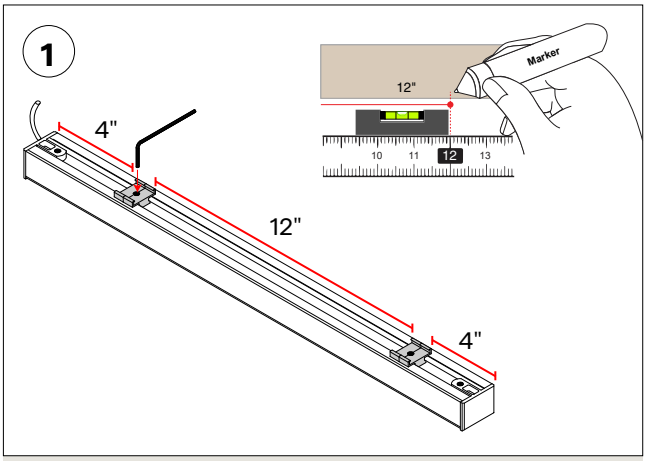


Determine the VERS extrusion(s) location and positioning on desired surface. Make any necessary reference markings to indicate where each clip is to be secured in place. Adjust the preinstalled T-Bar Clips by loosening the screws to slide into desired position. Recommended 4" from each end and 12" apart.

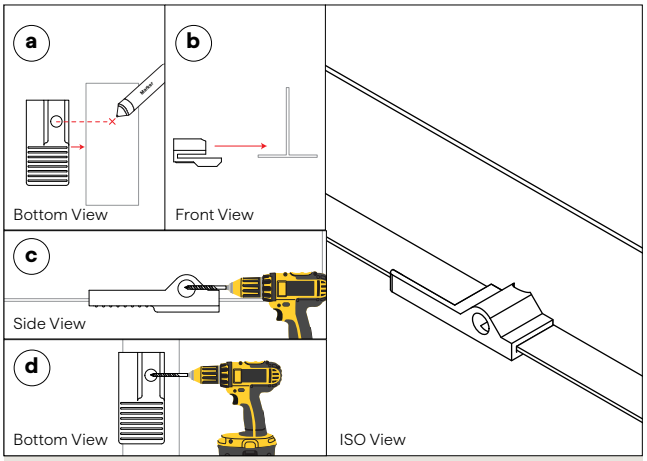


OPTIONAL - REQUIRED FOR S2/P2
Use provided jig to drill a hole in the t-bar ceiling grid, which will allow the wire to feed into the ceiling.

a. Mark where wire will go through the T-Bar.
b. Slide T-Bar Drill jig over T-Bar.
c. Using a 3-16" Drill bit drill through the side hole.
d. Then using a 3-16" Drill bit drill through the bottom hole.

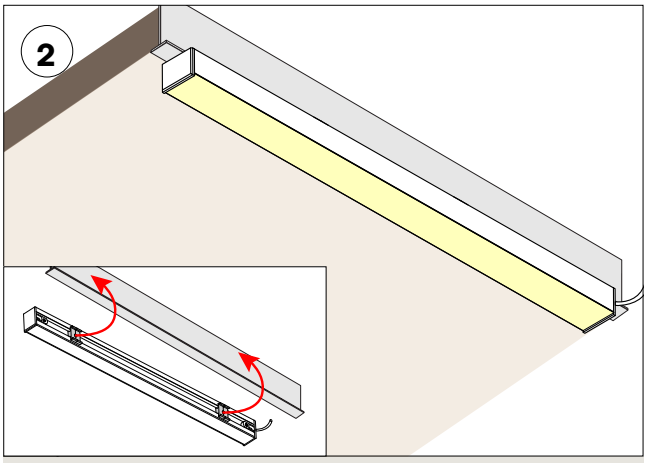

Snap extrusion onto T-BAR.

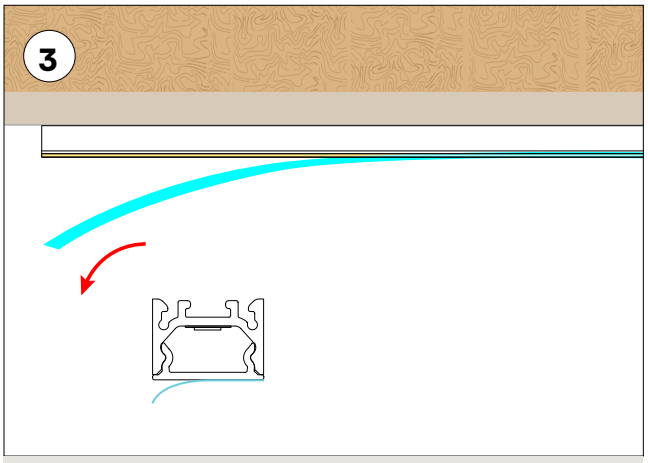


Remove protective film from the surface of the extrusion's lens.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SURFACE MOUNTING METHOD: **MAGNET MOUNT**

- One magnet clip per foot
- MMA-02 comes in 12" pieces; use at least one clip per MMA-02 accessory
- MMA-02 can be cut into smaller pieces, if desired

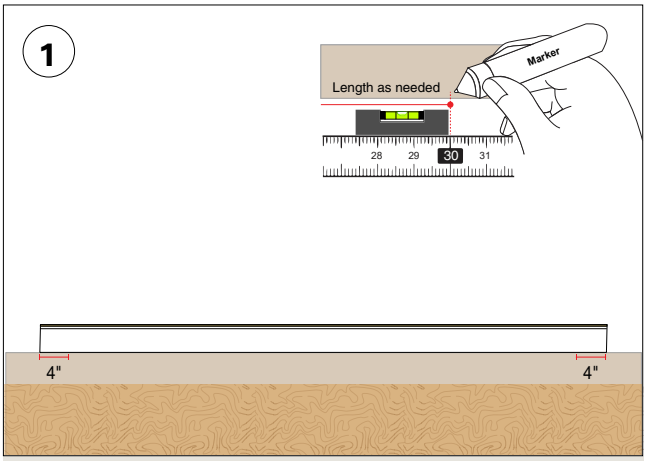


Determine the VERS fixture(s) location and positioning on desired surface. Make any necessary reference markings to indicate where the magnet mount accessory bracket is to be secured in place.

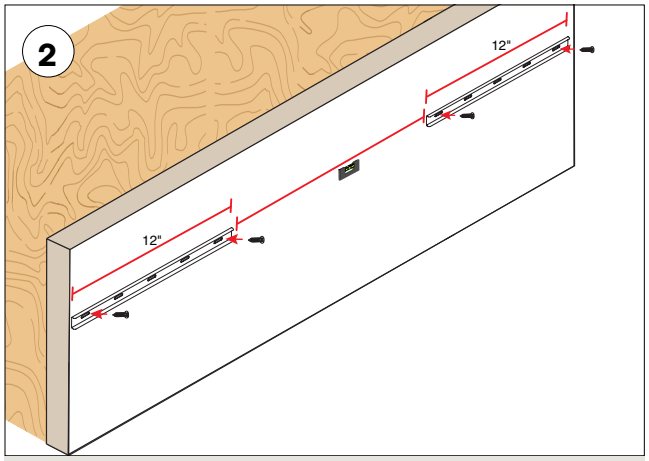

a. Mount the two #6 flat head screws into the 12" magnet mount accessory brackets through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

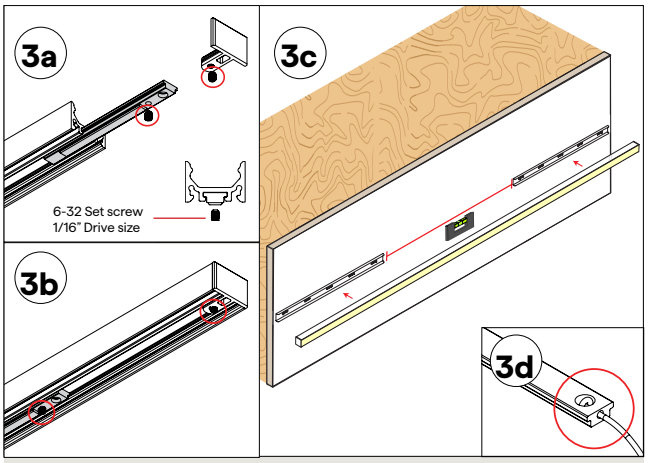


a. Unscrew the non-feed VERS endcap using an allen key, and slide in the magnet clips.

b. Using the supplied set screw fasten the non-feed endcap that was removed, and secure the magnet clips into your desired location.

c. Place the assembled fixture into the magnet mount bracket.

d. For installations requiring seismic precautions, monofiliment may be used with magnet clips as pictured.

NOTE: The magnet clips should be offset to the flat heads used to secure the bracket, to maximize magnetic connection.

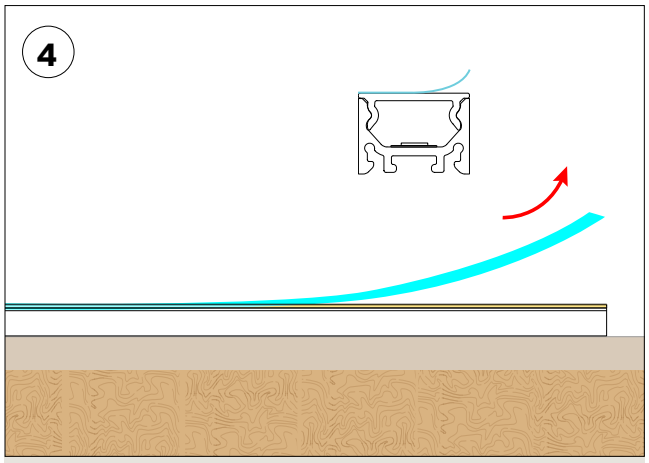


Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


RECESSED MOUNTING METHOD: **MAGNET MOUNT**

- One magnet clip per foot
- MMA-02 comes in 12" pieces; use at least one clip per MMA-02 accessory
- MMA-02 can be cut into smaller pieces, if desired

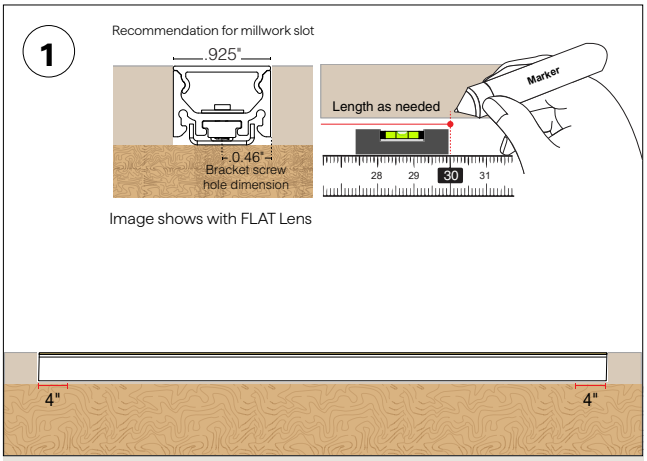


Determine the VERS fixture(s) location and positioning on desired surface. Make any necessary reference markings to indicate where the magnet mount accessory bracket is to be secured in place.

NOTE: Depth of the channel in the millwork is dependent on overall height with the magnet clip and Magnet Mount Accessory.

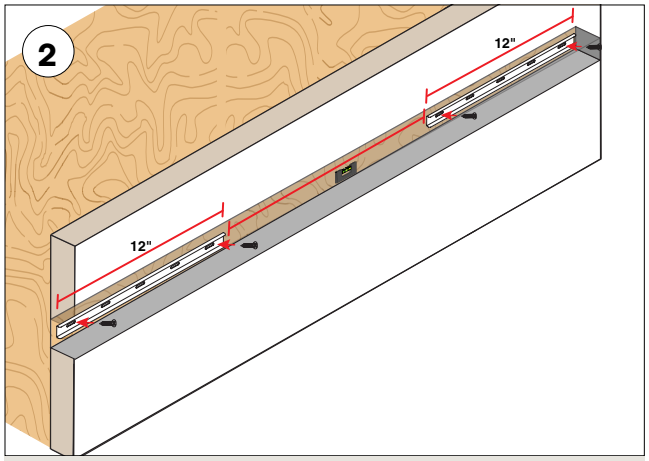

a. Mount the two #6 flat head screws into the 12" magnet mount accessory brackets through the slotted holes at each end. Ensure the screw head is flush with the magnet mount bracket.

NOTE: If surface application requires a longer screw, the screw size must be a #6 Flat Head.

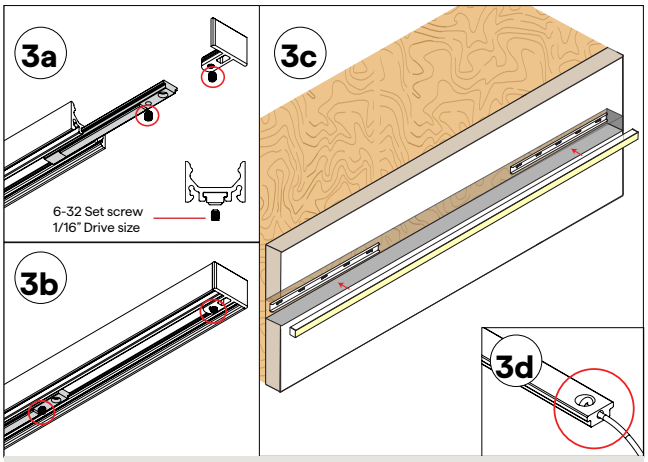


a. Unscrew the non-feed VERS endcap using an allen key, and slide in the magnet clips.

b. Using the supplied set screw fasten the non-feed endcap that was removed, and secure the magnet clips into your desired location.

c. Place the assembled fixture into the magnet mount bracket.

d. For installations requiring seismic precautions, monofiliment may be used with magnet clips as pictured.

NOTE: The magnet clips should be offset to the flat heads used to secure the bracket, to maximize magnetic connection.

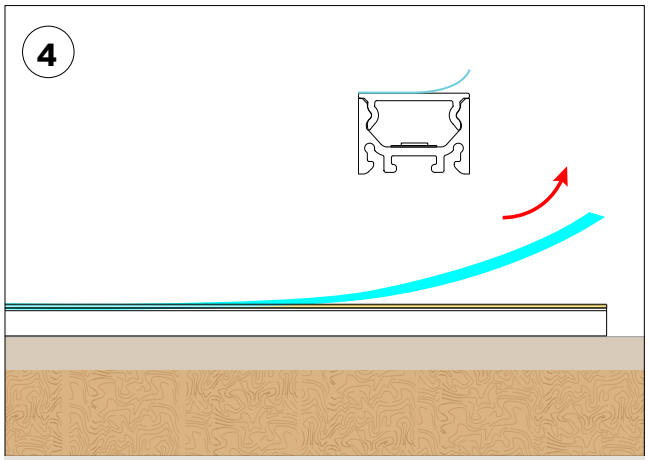

Remove protective film from the surface of the fixture's lens.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS-DROP-RGB(10)


Linear Fixtures Color Data


VERS-10-RGB-6.0-R-DRY-PR

0 K

CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.673
Y: 0.301
U: 0.511
V: 0.343
Δuv: n/a








R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30

Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

Beam Angle





106.9°


VERS-10-RGB-6.0-R-DRY-DF

0 K

CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.678
Y: 0.303
U: 0.513
V: 0.344
Δuv: n/a








R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30

Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

Beam Angle





128.8°


VERS-10-RGB-6.0-G-DRY-PR

0 K

CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.181
Y: 0.713
U: 0.065
V: 0.382
Δuv: n/a








R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30

Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

Beam Angle



109.7°

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-03-11-24


VERS-DROP-RGB(10)


Linear Fixtures Color Data


VERS-10-RGB-6.0-G-DRY-DF

0 K

CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.180
Y: 0.717
U: 0.064
V: 0.383
Δuv: n/a








R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30

Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

Beam Angle





130.8°


VERS-10-RGB-6.0-B-DRY-PR

0 K

CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.127
Y: 0.084
U: 0.136
V: 0.134
Δuv: n/a








R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30

Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

Beam Angle





111.4°


VERS-10-RGB-6.0-B-DRY-DF

0 K

CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.127
Y: 0.085
U: 0.135
V: 0.135
Δuv: n/a








R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30

Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

Beam Angle



133°

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-03-11-24