

SW-SCOB24/3.0

LED Strips - Static White SCOB





- One bin, two step static white SCOB strip with 282 lm/ft @ 3000K
- 1" cut point
- Ambient operating temp: -4-140°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 50000 hrs

1 V/WATTS	2 RATED	3 CCT	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SW-SCOB24/3.0	DRY						

Sample Part Number: **SW-SCOB24/3.0-DRY-24-CON6-CLS-WH-CL2-48"**

1 V/WATTS

SW-SCOB24/3.0

Voltage: 24VDC
Wattage: 3.0W/ft
See following pages for compatible power supplies.

2 RATED

DRY	IP20

3 CCT

22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

4 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")
BRL	Barrel
CLS	Closed End (No feed)
CON6	Connector 6"
CON24	Connector 24"

Connector/Wire In not needed to specify product. Typical selection is BW.
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

5 CONNECTOR/WIRE OUT

BW	Bare Wire (Standard 24")
BRL	Barrel
CLS	Closed End (No feed)
CON6	Connector 6"
CON24	Connector 24"

Connector/Wire Out not needed to specify product. Typical selection is CLS or BW.
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

6 WIRE COLOR

WH	White
BK	Black
N/A	Specify for Barrel

Barrel is white

7 WIRE TYPE

CL2	Class 2
CL2P	Class 2 Plenum Rated
N/A	Specify for Barrel

CL2P only available with bare wire leads (BW)

8 ILLUMINATED LENGTH

DRY: 1"-384" in 1" increments

COMPATIBLE EXTRUSIONS

	WIDE	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN	POSH
DRY															✓	
DMP																
WET																

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-07-26

SW-SCOB24/3.0

LED Strips - Static White SCOB

3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 50000 hrs]
Tested with SW-SCOB24/3.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	262	91 Lm/W	93	58	90	98
2400K	268	91 Lm/W	92	82	90	100
2700K	280	96 Lm/W	94	78	92	100
3000K	282	96 Lm/W	94	90	92	101
3500K	300	103 Lm/W	95	97	92	100
4000K	301	104 Lm/W	95	91	91	101


TEMPERATURE RATINGS

		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F

4/5 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

BW




Bare Wire 24"
Stranded 22 AWG

BRL




Barrel 6" - DRY/DMP | 22 AWG

BRL




Barrel 6"- WET | 22 AWG

CON6/CON24




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

CLS



Not soldered


6 WIRE COLOR



White

Black

8 ILLUMINATED LENGTH - DIMENSIONS



Section (in)	A	B	C
DRY (IP20)	0.32"	1.00"	0.12"

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-08-07-26

SW-SCOB24/3.0

LED Strips - Static White SCOB

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QZ-DMX QZ-PRO-PH/0-10V
1%	Q-DIM QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

SW-SCOB24/3.0

LED Strips - Static White SCOB

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PRO-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PRO-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE WIRING ACCESSORIES

BARREL-EXT



8ft barrel cable extender
DRY ONLY

BARREL FOUR-FER



Splits lead from one to four LED Barrel connector fixtures, DRY/DMP

CON120-EXT



10ft Con cable extender
DRY/DMP/WET

CON FOUR-FER




Splits lead from one to four LED Con connectors
DRY/DMP/WET

CON M - BARREL F




Male con to barrel cable adaptor
DRY/DMP

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-07-26

SW-SCOB24/3.0

LED Strips - Static White SCOB

COMPATIBLE APPS

NFC APP

Q-NFC

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


LINEAR LED STRIP

Installation Instructions - LED Strips - Static White SCOB

ATTENTION: Please read all instructions BEFORE installation

- Product to be installed by a licensed electrician
- Always ensure power supply connection to electrical circuit is disconnected before working on it
- Follow diagram to connect Secondary Voltage wires to power supply. Refer to QTL power supply instructions for wiring
- Use only with Class 2 power supply unit — Compatible for use with QTL power supplies
- Suitable for DRY locations
- Suitable for installation in storage area of a clothes closet when assembled as a finished extrusion up to 4W/ft at QTL facility
- Temp Rating: Refer to cut sheet
- Not rated for walkover
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:

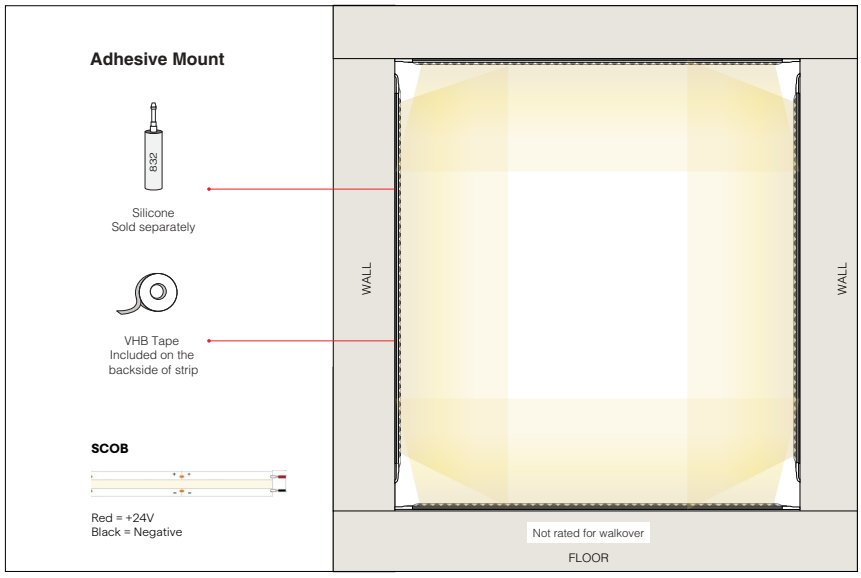

MOUNTING METHOD

- METHODS & INSTALLATIONS (page 1)
- LEDs SOLDERED (page 2)
- SURFACE MOUNTING METHOD (page 3)
- ASSEMBLY (page 4)

NOTES:

- *Avoid bending in sharp angles which may damage the LED.*
- *Always test LED operation before installing in extrusion. Connect LED to power supply to ensure it is working properly and all non-factory soldered connections are secure.*
- *Diagrams for representation only and not to scale.*

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-02-12-26


LINEAR LED STRIP

Installation Instructions - LED Strips - Static White SCOB

LED STRIP LEAD WIRE & JUMPER INSTRUCTIONS: **DRY IP20**


If LED wires are pre-soldered from the factory, skip to page 4.

1

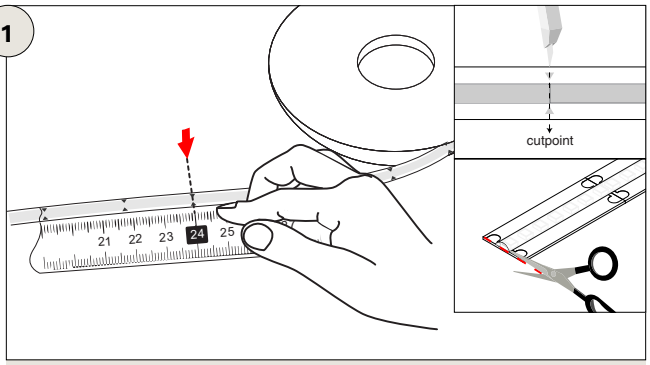

Measure and cut LED strip to desired length with scissors along the cut point.

2

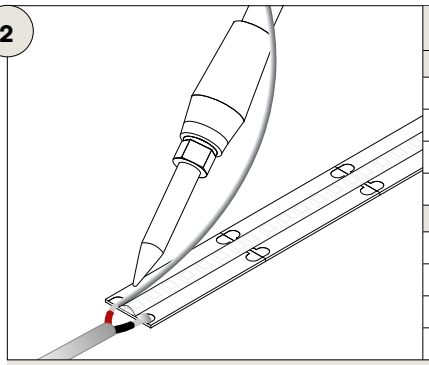


ITEMS INCLUDED
iQ-LED-24-KIT
(1) 24" Lead wire
(1) 6" Solder
(1) 1" Shrink Tube
(1) 1/2" Shrink Tube
iQ-JUMP-6-KIT
(1) 6" Lead wire
(1) 6" Solder
(2) 1" Shrink Tube
(2) 1/2" Shrink Tube

Solder lead wire onto solder pad. Confirm positive (+) and negative (-) are matched up correctly before soldering. BLACK wire is negative, RED wire is positive.

NOTE: Recommended soldering iron temperature of 650˚ – 700˚F for lead-free solder.

3

NOTE:
Connect LED to power supply to ensure it is working properly and all non-factory soldered connections are secure before proceeding with step #3.

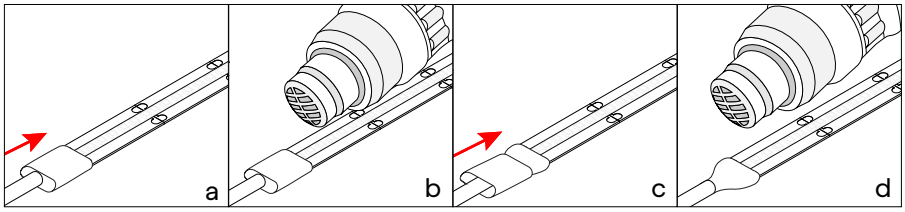

ONCE ALL CONNECTIONS ARE FUNCTIONING PROPERLY, DISCONNECT POWER AND BEGIN HEAT SHRINKING INSTRUCTIONS BELOW:

a: Place 1st sleeve (1/2" Shrink Tube) on lead wire.

b: Shrink the tube with heat gun.

c: Place 2nd sleeve (1" Shrink Tube) on lead wire.

d: Shrink the tube with heat gun.

VERY IMPORTANT: Ensure polarity of LED strips line up with each other.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


LINEAR LED STRIP

Installation Instructions - LED Strips - Static White SCOB

SURFACE MOUNTING METHOD

SURFACE PREPARATION


1

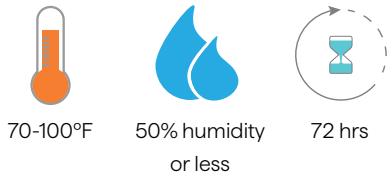

Temperature and environmental concerns:


- Ideal application environment is 70-100°F in 50% humidity or less.
- Minimum application temperature: 50°F
- This temperature and humidity should be maintained for 72 hours after application for maximum bond strength.

2

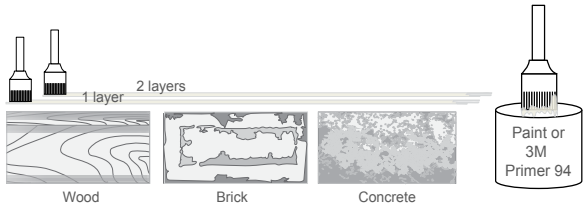

For porous materials (Wood, Brick, Concrete etc.) apply two layers of paint or primer to the surface. This will help create a better bonding surface for these materials. These can be purchased from a local hardware store.

3

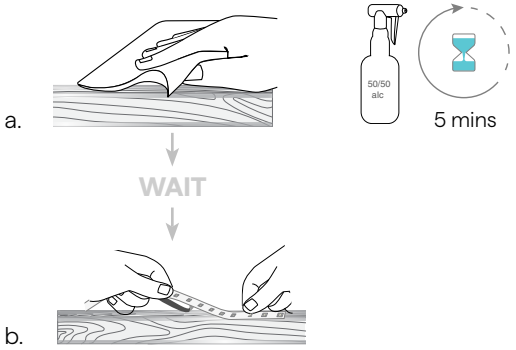

a. Using a 50/50 alcohol mix, thoroughly clean surface area where LED will be installed. Allow 5 minutes to dry.

b. Peel back 0.5" of the VHB tape's protective film on one end of LED and use firm pressure to adhere it to the desired surface, avoiding air bubbles. Continue peeling the film and adhering the strip in small sections until the entire length is installed.

MATERIALS	SUGGESTED EPOXIES
Concrete, Stone, Cinderblock, Metal, and Brick	Loctite Metal and Concrete Two-Part Epoxy
ABS, Fiberglass, Plastic, and PVC	Loctite Plastic Two-Part Epoxy
Tile, Wood, Ceramic, Glass, or Metal	Loctite Clear Two-Part Epoxy
All Purpose	Strong Stik

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


LINEAR LED STRIP

Installation Instructions - LED Strips - Static White SCOB

LED INSERTION FOR IN-FIELD ASSEMBLY INSTALLATION


STRIP IN EXTRUSION

1

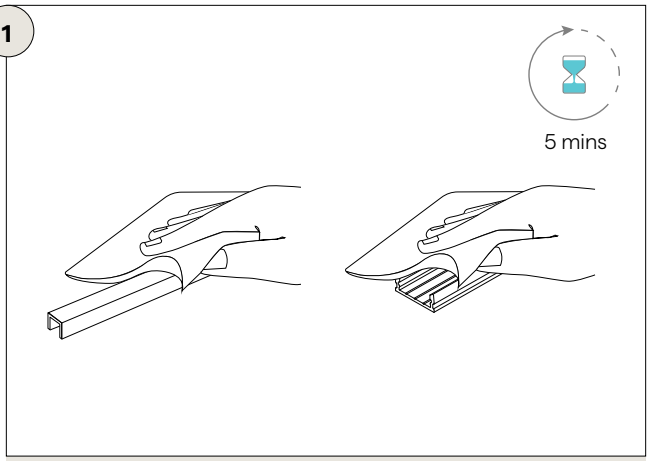


Using a 50/50 alcohol mix, thoroughly clean surface area of the extrusion and tray. Allow 5 minutes to dry.

2

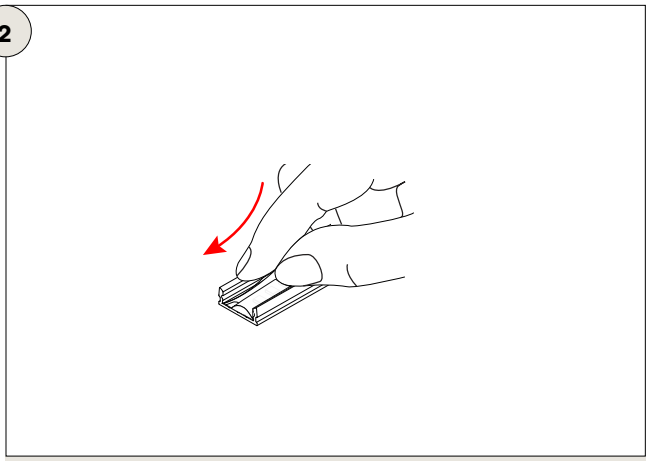


Peel back 0.5" of the VHB tape's protective film on one end of LED and use firm pressure to adhere it to the extrusion, avoiding air bubbles. Continue peeling the film and adhering the strip in small sections until the entire length is installed.

3

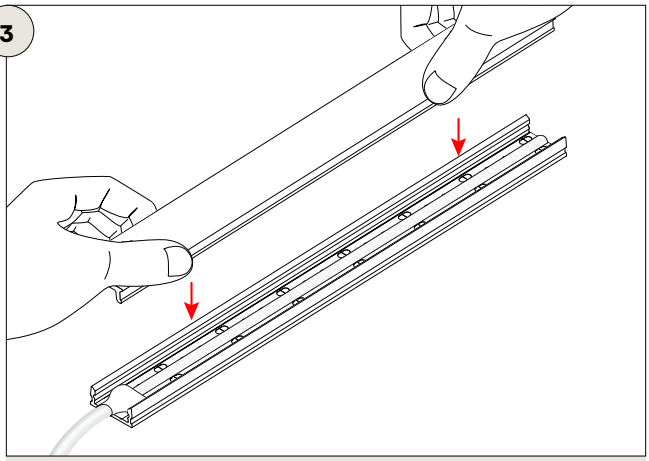

Apply uniform pressure until the extrusion and lens snap securely together.

4

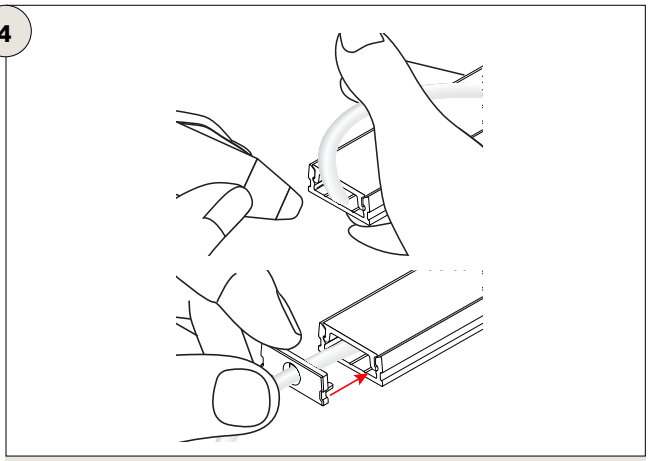

Add glue inside the end cap and glue around edges to secure end cap in place. Do not allow glue to come in contact with LED.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

SW-SCOB24/3.0

Linear LED Strips Color Data

2200K

2176 K

CRI: 93.2

CRI R9: 57.9

TM30 Rf: 90.3

TM30 Rg: 98.4

CQS: 86.1


X: 0.508


Y: 0.415


U: 0.292

V: 0.357

Δuv: -0.0002







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.2	97.8	96.5	98.7	98.3	88.2	87.6	79.2	57.9	96.6	91.3	85.9	98.9	98.8	90.5
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
79.4	84.2	90.8	90.4	91.0	91.4	90.4	89.9	87.6	89.2	90.0	91.2	89.8	82.1	80.7
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
89.7	93.5	93.3	92.7	93.8	91.0	94.2	91.9	94.2	94.9	92.4	88.3	82.5	63.0	90.4	81.2

TM30			
Hue Bin	R_f	Chroma	Hue
1	90	-5%	2%
2	94	-3%	2%
3	93	-1%	1%
4	93	-4%	-3%
5	94	-3%	2%
6	91	0%	6%
7	94	-2%	2%
8	92	5%	5%
9	94	2%	3%
10	95	2%	1%
11	92	5%	-1%
12	88	5%	-7%
13	82	2%	-19%
14	63	-5%	-25%
15	90	-4%	-4%
16	81	-8%	-11%

2400K

2304 K

CRI: 91.6

CRI R9: 81.9

TM30 Rf: 89.6

TM30 Rg: 100.1

CQS: 88.9


X: 0.494


Y: 0.412


U: 0.284

V: 0.355

Δuv: -0.0009







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.1	94.2	98.3	90.5	90.5	83.5	92.4	91.7	81.9	89.8	81.7	79.6	91.7	97.6	98.7
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
84.0	86.3	91.1	89.0	90.1	91.5	92.2	91.5	90.6	90.7	89.3	89.5	91.6	87.1	86.6
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
92.3	94.0	91.1	89.0	93.0	90.5	91.7	89.9	91.5	92.8	89.9	84.2	78.2	80.1	90.5	86.2

TM30			
Hue Bin	R_f	Chroma	Hue
1	92	-2%	2%
2	94	0%	-1%
3	91	0%	-2%
4	89	-5%	-6%
5	93	-4%	1%
6	91	1%	7%
7	92	-1%	5%
8	90	6%	4%
9	92	4%	3%
10	93	4%	0%
11	90	7%	-3%
12	84	5%	-10%
13	78	2%	-21%
14	80	-1%	-14%
15	90	-4%	-1%
16	86	-4%	-8%

2700K

2606 K

CRI: 94.4

CRI R9: 78.1

TM30 Rf: 92.1

TM30 Rg: 100.3

CQS: 93.0


X: 0.466


Y: 0.409


U: 0.267

V: 0.352

Δuv: -0.0009







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95.9	96.9	99.1	95.2	95.4	89.5	93.0	90.2	78.1	95.5	89.0	87.1	95.7	97.8	97.7
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
87.5	90.7	95.7	96.4	95.7	94.9	96.0	96.8	95.7	96.1	94.9	95.1	96.5	91.0	89.6
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
93.0	96.2	94.1	92.7	95.0	93.1	94.9	93.6	94.2	94.0	93.3	87.0	82.6	85.7	90.5	85.9

TM30			
Hue Bin	R_f	Chroma	Hue
1	93	-3%	1%
2	96	0%	0%
3	94	0%	0%
4	93	-4%	-3%
5	95	-2%	1%
6	93	1%	5%
7	95	-1%	2%
8	94	4%	2%
9	94	2%	3%
10	94	3%	2%
11	93	4%	1%
12	87	6%	-8%
13	83	1%	-14%
14	86	1%	-12%
15	91	-3%	-1%
16	86	-3%	-10%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-02-10-26

SW-SCOB24/3.0

Linear LED Strips Color Data

3000K

2887 K

CRI: 94.2

CRI R9: 90.5

TM30 Rf: 91.8

TM30 Rg: 100.7

CQS: 94.4


X: 0.442


Y: 0.401


U: 0.256

V: 0.347

Δuv: -0.0019







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.2	95.6	98.9	93.5	93.2	88.9	95.0	95.7	90.5	93.0	88.0	84.4	93.3	97.5	97.1
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
89.5	92.1	95.9	97.3	97.3	96.7	97.3	97.7	97.3	96.8	95.4	95.1	96.4	92.6	92.2
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
93.6	95.7	93.5	91.4	94.4	94.6	90.8	93.6	92.7	92.7	92.8	86.1	84.3	87.5	90.3	86.8

TM30

Hue Bin	R_f	Chroma	Hue
1	94	-1%	1%
2	96	1%	-1%
3	94	0%	-1%
4	91	-4%	-4%
5	94	-3%	1%
6	95	1%	3%
7	91	-2%	5%
8	94	3%	2%
9	93	3%	4%
10	93	4%	3%
11	93	5%	2%
12	86	5%	-7%
13	84	1%	-12%
14	87	1%	-10%
15	90	-3%	0%
16	87	-1%	-10%

3500K

3475 K

CRI: 95.4

CRI R9: 96.7

TM30 Rf: 91.6

TM30 Rg: 100.4

CQS: 96.0


X: 0.406


Y: 0.390


U: 0.237

V: 0.341

Δuv: -0.0007







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.4	96.9	97.1	94.2	94.6	92.6	97.1	97.0	96.7	96.0	90.1	81.0	94.0	96.6	95.0
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
91.2	94.8	95.2	96.7	98.6	99.5	99.5	98.4	98.4	98.3	96.7	95.5	96.4	95.5	94.7
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
93.7	95.3	93.5	91.9	91.6	95.1	91.1	93.1	92.1	91.0	90.5	87.2	87.7	89.2	88.7	88.9

TM30

Hue Bin	R_f	Chroma	Hue
1	94	-1%	1%
2	95	1%	-1%
3	94	0%	-2%
4	92	-3%	-4%
5	92	-7%	0%
6	95	0%	3%
7	91	-2%	5%
8	93	2%	4%
9	92	2%	5%
10	91	3%	6%
11	90	5%	4%
12	87	5%	-4%
13	88	1%	-9%
14	89	2%	-7%
15	89	0%	-3%
16	89	1%	-5%

4000K

3973 K

CRI: 95.2

CRI R9: 90.7

TM30 Rf: 91.4

TM30 Rg: 101.0

CQS: 95.7


X: 0.381


Y: 0.375


U: 0.226

V: 0.334

Δuv: -0.0011







R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.9	97.1	95.8	94.4	94.7	93.8	97.6	94.9	90.7	96.9	90.7	77.2	93.8	96.0	92.7
Q1	**Q2**	**Q3**	**Q4**	**Q5**	**Q6**	**Q7**	**Q8**	**Q9**	**Q10**	**Q11**	**Q12**	**Q13**	**Q14**	**Q15**
91.6	95.6	92.9	94.5	97.7	99.6	99.3	98.4	97.9	99.3	97.4	95.6	96.0	95.7	94.8
C1	**C2**	**C3**	**C4**	**C5**	**C6**	**C7**	**C8**	**C9**	**C10**	**C11**	**C12**	**C13**	**C14**	**C15**	**C16**
93.6	94.6	94.0	92.2	91.2	94.7	92.9	91.8	90.1	91.3	88.8	88.9	87.7	94.1	88.0	88.2

TM30

Hue Bin	R_f	Chroma	Hue
1	94	0%	1%
2	95	2%	-2%
3	94	0%	-2%
4	92	-3%	-3%
5	91	-6%	-1%
6	95	-1%	3%
7	93	-1%	4%
8	92	1%	5%
9	90	2%	7%
10	91	2%	5%
11	89	6%	5%
12	89	4%	-2%
13	88	3%	-8%
14	94	1%	2%
15	88	1%	-5%
16	88	2%	-5%

NOTES:
- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-02-10-26