

VERS-DROP-SK (10) STATIC WHITE

24VDC Linear Fixtures - Suspended

410.2 & 410.16 Closet Rated up to 4.0W/ft

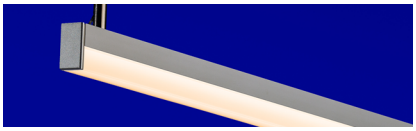



- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior
- Create long, continuous lines of light with easy-to-use inline bracket joiner connectors
- Utilizes an extruded drop lens that sits proud of the fixture for maximum variations of LED sources
- The high-quality lens provides a three sided diffuse illumination
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures.
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
					N/A

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
	BW	CLS	SV	AWM	SK			

Sample Part Number: **VERS-10-SK-SW-3.0-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-42"-E**

1 PRODUCT

VERS-10-SK-SW
VERS-10-SK-SW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply.

See following pages for compatible power supplies.

2 WATTS/FT

1.5	1.5W/ft
3.0	3.0W/ft
4.0	4.0W/ft
5.0	5.0W/ft
1.5HE	1.5W/ft HE
3.0HE	3.0W/ft HE
6.0HE	6.0W/ft HE
9.0HE	9.0W/ft HE

1.5	1.5W/ft
3.0	3.0W/ft
4.0	4.0W/ft
5.0	5.0W/ft
1.5HE	1.5W/ft HE
3.0HE	3.0W/ft HE
6.0HE	6.0W/ft HE

3 CCT

18	1800K
20	2000K
22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

18	1800K
20	2000K
22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

4 RATED

DRY	IP20

DMP	IP54

5 LENS

DF	Diffused
PR	Polar

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages.

6 EXTERNAL LOUVER

N/A	No Louver

7 WIRE INPUT/OUTPUT

SINGLE (Input Only)	
S2	Bottom Feed

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 36")

BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

SV	Silver

11 WIRE TYPE

AWM	Appliance Wiring Material

12 MOUNTING

SK	Suspension Bracket

13 FINISH

ST	Satin
BK	Black
BZ	Bronze
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O	Optimal Illumination
E	Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-05-05-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less

VERS-DROP-SK (10) STATIC WHITE

24VDC Linear Fixtures - Suspended

1 PRODUCT - DIMENSIONS




Profile with lens

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-10-SK-SW-**-30-DRY

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	120	98	144	98	204	98	269	98	253	98	317	98	526	98	691	98
DF	113	98	136	98	194	98	253	98	234	98	295	98	472	98	664	98


6 DIODE VISIBILITY

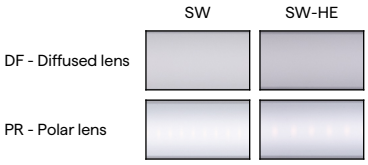

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

5W/ft



Diffused lens



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-05-05-26

VERS-DROP-SK (10) STATIC WHITE


24VDC Linear Fixtures - Suspended

TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	—	—

7 WIRE INPUT/ OUTPUT


SINGLE (Input only)



CONFIGURATION OPTIONS




Single Feed



Continuous Row End Feeds

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

10 WIRE COLOR


Silver

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-DROP-SK (10) STATIC WHITE

24VDC Linear Fixtures - Suspended

12 MOUNTING



Suspension Bracket

2 required up to 6' lengths; additional support required between 6' to 8'

13 FINISH



Satin

Black

Bronze

White


Custom finishes have longer lead times. Non-RAL 9003 whites custom.

15 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →


E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

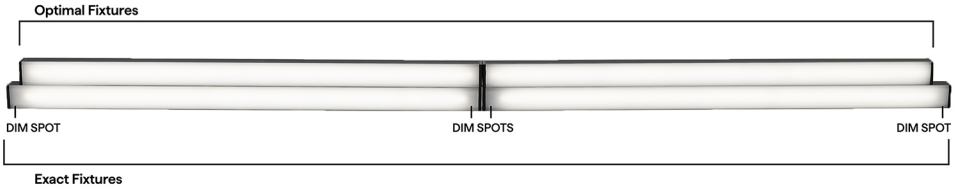

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture  End Feed
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S2  Bottom Feed
12"	11.49"
13"	12.49"
14"	13.49"
15"	14.49"
16"	15.49"
17"	16.49"
18"	17.49"
19"	18.49"
20"	19.49"
21"	20.49"
22"	21.49"
23"	22.49"
24"	23.49"
36"	35.49"
48"	47.49"
60"	59.49"
72"	71.49"
84"	83.49"
96"	95.49"

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-05-05-26

VERS-DROP-SK (10) STATIC WHITE


24VDC Linear Fixtures - Suspended

SW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture  End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S2  Bottom Feed
12"	10.49"
13"	12.49"
14"	12.49"
15"	14.49"
16"	14.49"
17"	16.49"
18"	16.49"
19"	18.49"
20"	18.49"
21"	20.49"
22"	20.49"
23"	22.49"
24"	22.49"
36"	34.49"
48"	46.49"
60"	58.49"
72"	70.49"
84"	82.49"
96"	94.49"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-DROP-SK (10) STATIC WHITE

24VDC Linear Fixtures - Suspended

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

VERS-SK

Linear Fixtures - Suspended



- Shop drawings required for run lengths over 8ft
- If no suspension length provided, 36" is standard
- Suspension cable maximum length: 120"
- Suspension cable is field cuttable
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Any run length over 8' requires inline brackets
- Consult factory for power over aircraft
- Consult factory for custom color of canopy
- Lag Screw is for mounting into drywall, wood, or other types of finished ceilings for non-feed mounting only

POWER FEED SUSPENSION KIT

1 PRODUCT	2 FEED	3 CANOPY SHAPE	4 CANOPY SIZE	5 CANOPY FINISH	6 APPLICATION	7 SUSPENSION CABLE LENGTH (IN)
SK			5"			

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

1 PRODUCT

SK	

2 FEED

SF	Single

3 CANOPY SHAPE

RD	Round
SQ	Square

4 CANOPY SIZE

5"

5 CANOPY FINISH

WH	White
BK	Black

6 APPLICATION

JB	Junction Box
TB	T-Bar Mount

JB - mounting bracket only, junction box not included
TB - mounting bracket and junction box

7 SUSPENSION CABLE LENGTH (IN)

36"
120"

NON-FEED SUSPENSION KIT

1 PRODUCT	2 FEED	3 CANOPY SHAPE	4 CANOPY SIZE	5 CANOPY FINISH	6 APPLICATION	7 SUSPENSION CABLE LENGTH (IN)
SK	NF					

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

1 PRODUCT

SK	

2 FEED

NF	No Feed

3 CANOPY SHAPE

RD	Round
SQ	Square

4 CANOPY SIZE

2"
5"
5"

5 CANOPY FINISH

WH	White
BK	Black
WH	White
BK	Black

6 APPLICATION

TB	T-Bar Mount
LS	Lag Screw

TB - T-Bar clip only, junction box not included

JB	Junction Box

Mounting bracket only, junction box not included

7 SUSPENSION CABLE LENGTH (IN)

36"
120"

KIT CONTENTS

- 1/16" Steel suspension cable – 36" standard
- Selected canopy
- Cable Gripper
- Cable Coupler

JBOX
- Bracket to mount to junction box (junction box not included)
- Wire strain relief
- Ties for securing electrical cable to suspension cable

T-BAR – feed
- Includes junction box specifically designed for T-BAR applications
- Bracket to mount to junction box
- Wire strain relief
- Ties for securing electrical wire to suspension cable

T-BAR – non-feed
- Bracket to mount to T-BAR (no junction box)

LAG SCREW – non-feed only
- Double ended screw, with a wood thread side and machine thread side
- One piece cable coupler


© 2024 QTL. All rights reserved

VERS-SK

Linear Fixtures - Suspended


3 CANOPY OPTIONS

RD - 2" - NF




Round
2"
No Feed

SQ - 2" - NF




Square
2"
No Feed

RD - 5" - NF




Round
5"
No Feed

SQ - 5 - NF




Square
5"
No Feed

RD - 5" - SF




Round
5"
Single Feed

SQ - 5" - SF



Square
5"
Single Feed


5 CANOPY FINISH



White

Black


JOINTS/CONNECTORS



Inline Bracket


6 APPLICATION

TB
Power Feed Kit



T-Bar Junction Box

TB
Non-Feed Kit




T-Bar Clip

LS



Lag Screw

KIT HARDWARE



Cable Gripper



Cable Coupler


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS-SK


Linear Fixtures - Suspended

MOUNTING

- Maximum single fixture length: 98”
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25” in middle without additional support.
- Shop drawings required for run lengths over 8ft

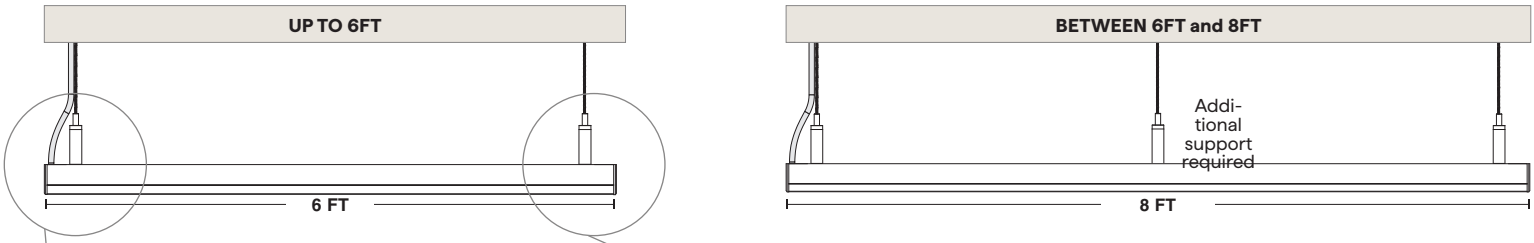

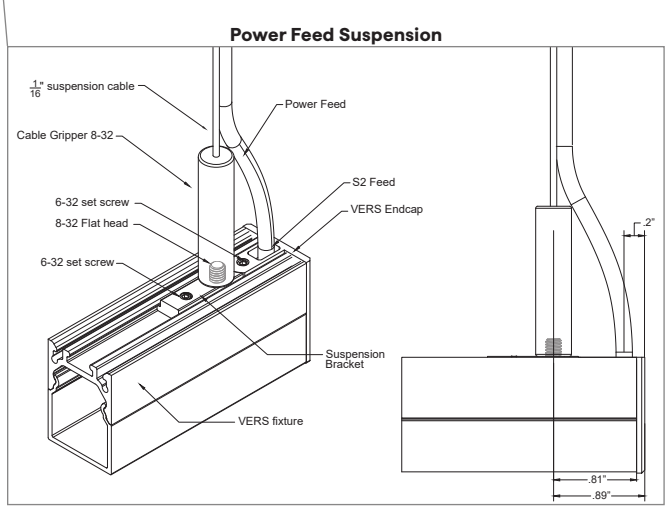

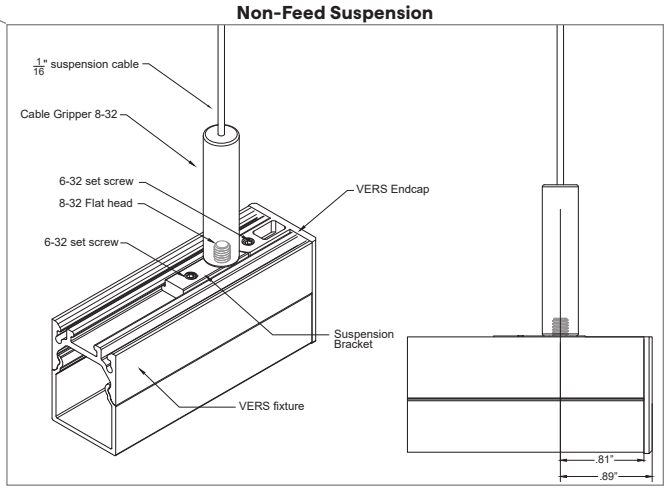


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS-SK

Linear Fixtures - Suspended


MOUNTING


- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft

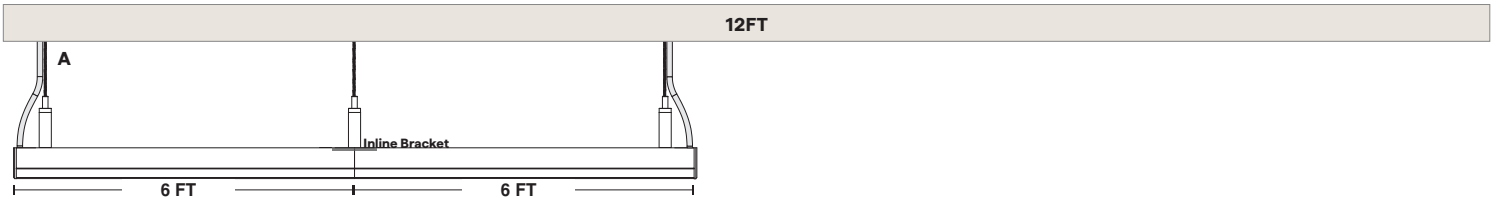

Part number example for a suspended VERS-01 dry rated static white fixture with a diffused lens in 1.5W/ft, 3000K, in a satin finish:

A VERS-10-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-SF-RD-5"-WH-JB-36" (2X)
SK-NF-RD-5"-WH-JB-36" (1X)

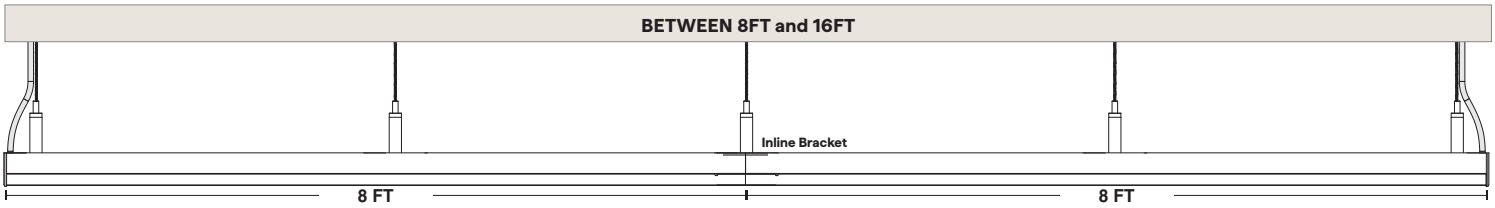

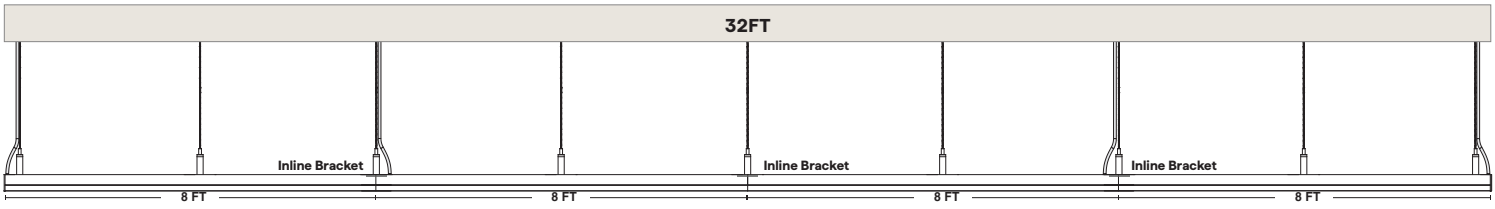


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS-SK

Linear Fixtures - Suspended


SUSPENSION T-BAR POWER FEED ASSEMBLY

SK-SF-RD-5-**-TB-36

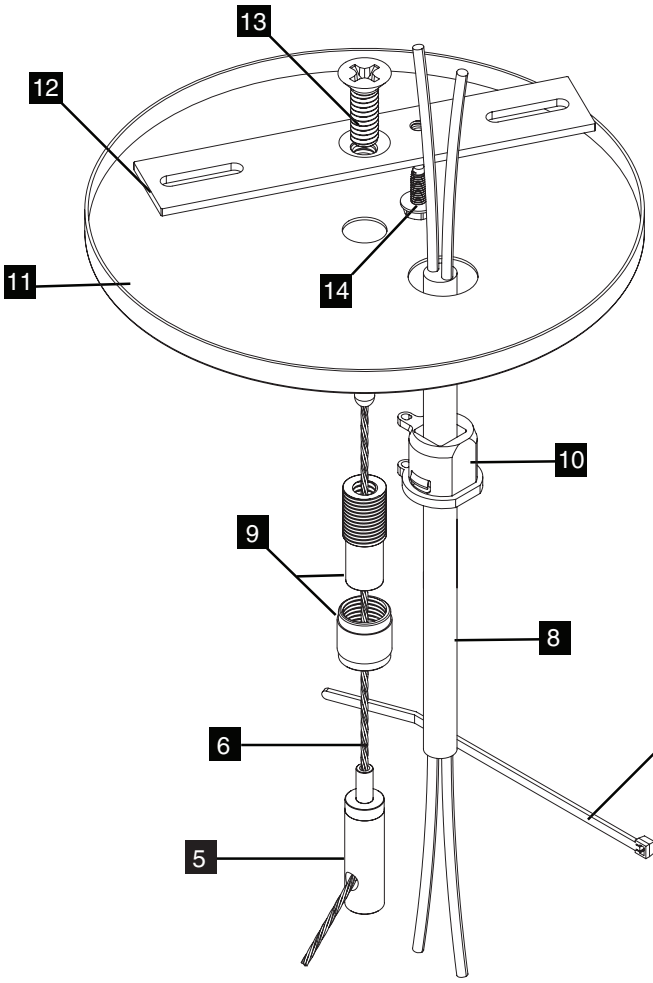

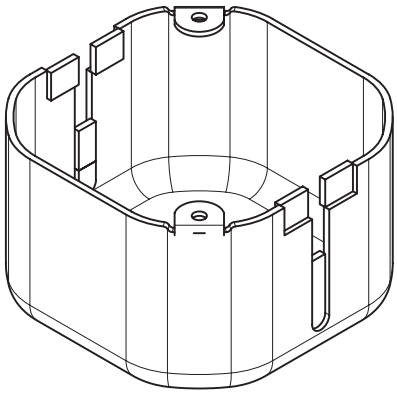

15 T-Bar mounted Junction Box

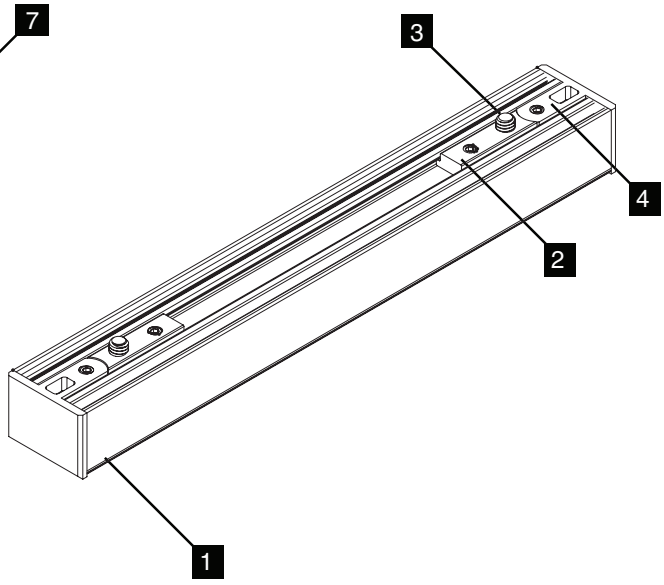

VERS SUSPENSION COMPONENTS

1 VERS	2 Suspension Bracket	3 8-32 Screw	4 Endcap	5 Cable Gripper	6 1/16” Cable	7 Tie
8 Lead Wire	9 Cable Coupler	10 Strain Relief	11 Canopy	12 Crossbar	13 1/4”-20	14 Ground Screw

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS-SK

Linear Fixtures - Suspended

SUSPENSION POWER FEED ASSEMBLY - TO MOUNT TO JUNCTION BOX*

*JUNCTION BOX NOT INCLUDED

SK-SF-RD-5-**-JB-36

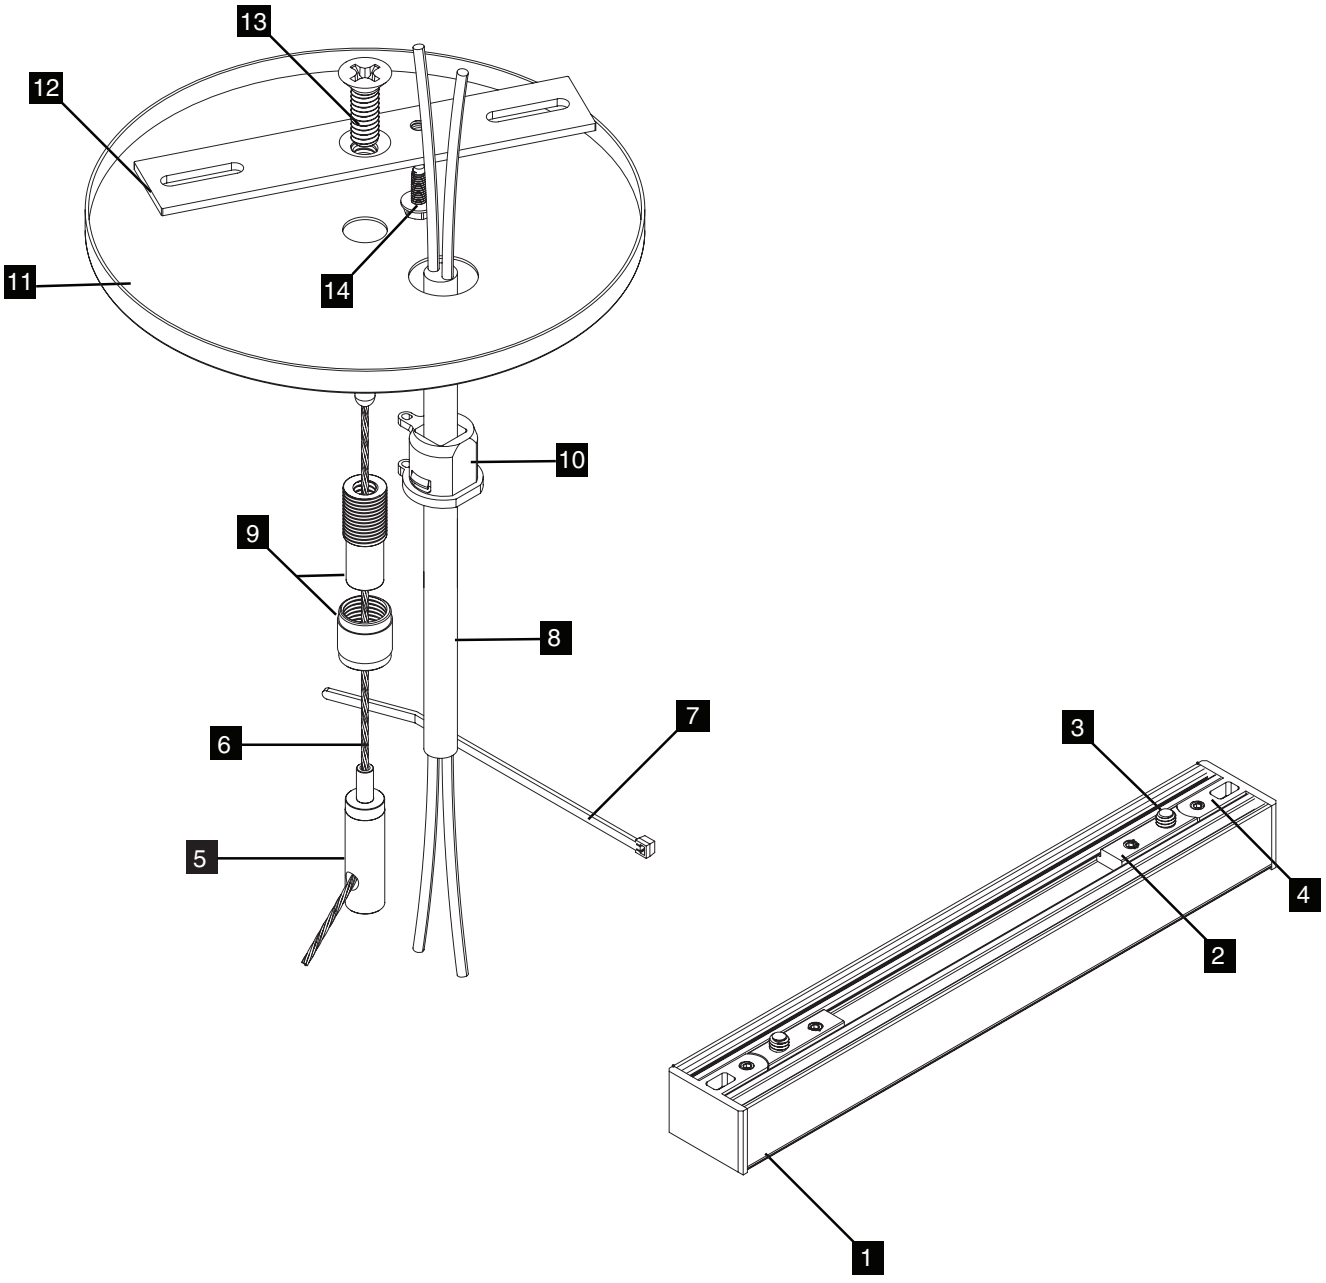

VERS SUSPENSION COMPONENTS

1 VERS	2 Suspension Bracket	3 8-32 Screw	4 Endcap	5 Cable Gripper	6 1/16” Cable	7 Tie
8 Lead Wire	9 Cable Coupler	10 Strain Relief	11 Canopy	12 Crossbar	13 1/4”-20	14 Ground Screw


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS-SK

Linear Fixtures - Suspended

SUSPENSION T-BAR NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-TB-36

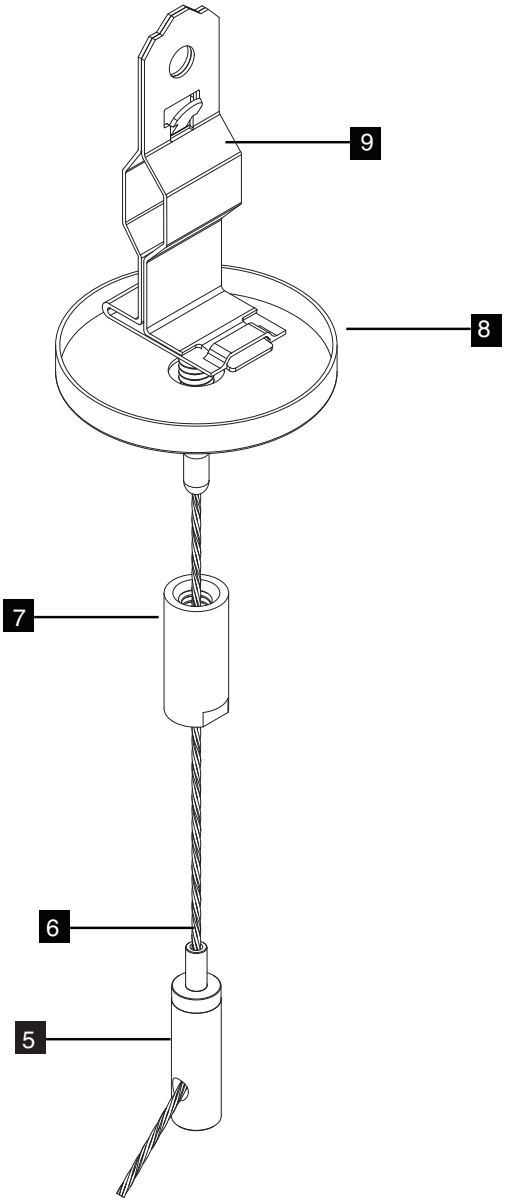

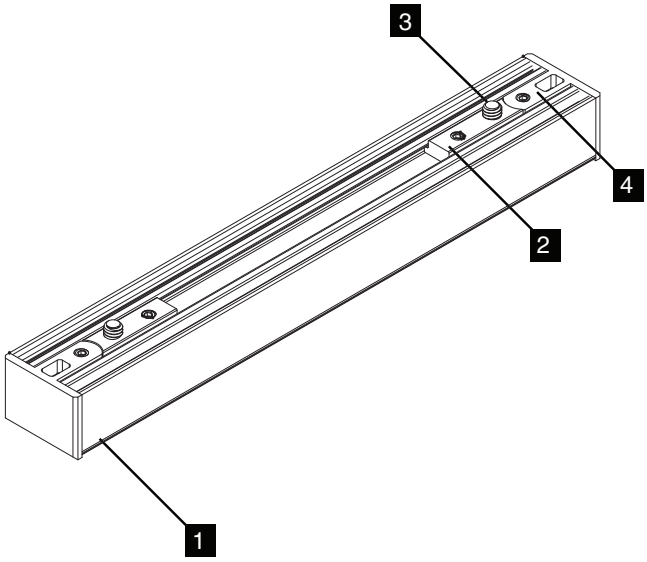

NON-POWERED FEED KIT

1 VERS	2 Suspension Bracket	3 8-32 Screw	4 Endcap	5 Cable Gripper
6 1/16” Cable	7 Cable Coupler	8 Canopy	9 T-Bar Clip	


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS-SK

Linear Fixtures - Suspended

LAG SCREW NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-LS-36

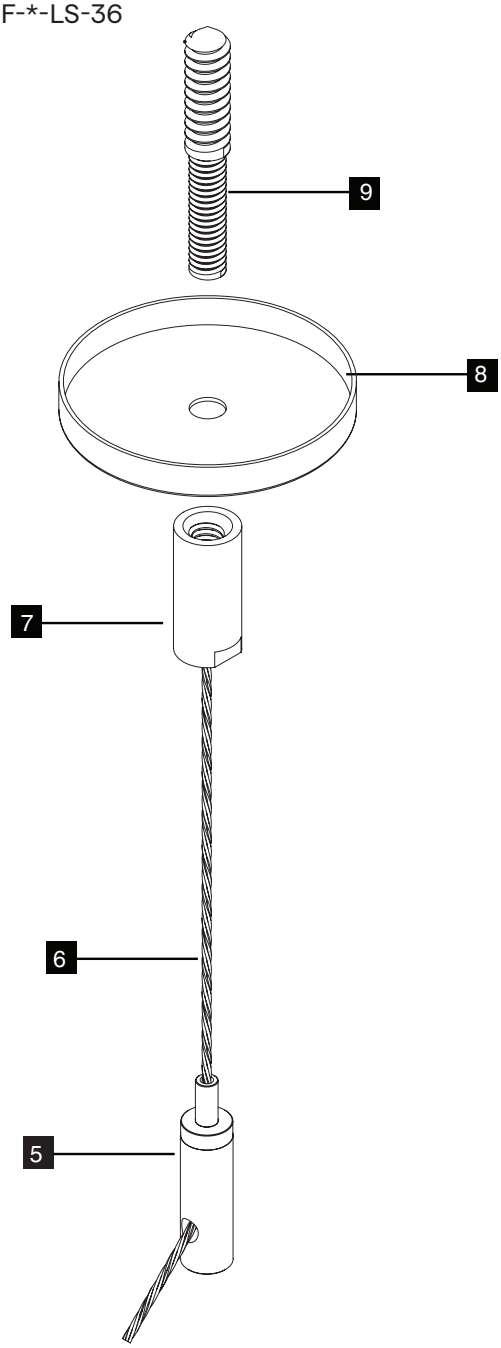

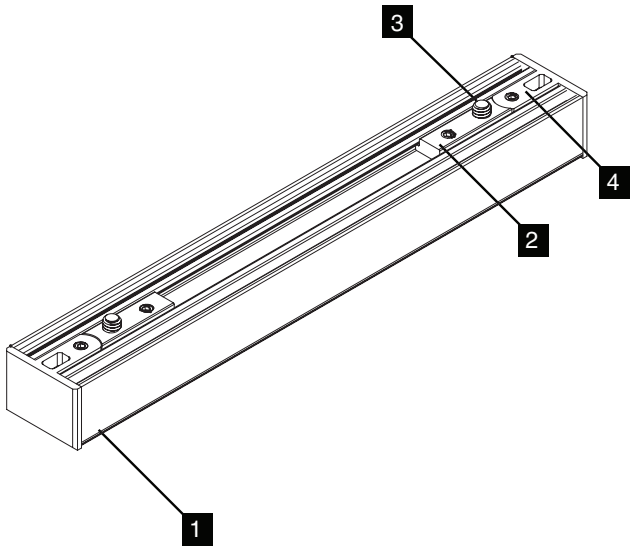

NON-POWERED FEED KIT

1 VERS	2 Suspension Bracket	3 8-32 Screw	4 Endcap	5 Cable Gripper
6 1/16” Cable	7 Cable Coupler	8 Canopy	9 Lag Screw	

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS SUSPENDED


Linear Fixture Suspended Installation Instructions

ATTENTION: Please read all instructions BEFORE installation




- Product to be installed by a licensed electrician - Field modifications void warranty
- Use only with Class 2 power supply unit — Warranty only valid with QTL power supplies
- Suitable for installation in storage area of a clothes closet when assembled as a finished fixture up to 4W/ft at QTL facility
- Input Voltage: 24VDC
- Diagrams for representation only and not to scale.

METHODS OF INSTALLATION:


- Inline Install (page 3)
- J-BOX Feed & Non-Feed (page 4-6)
- TB-JBOX Feed & Non-Feed (page 7-9)
- NF-TBAR (page 10-11)
- Lag Screw (page 12-13)

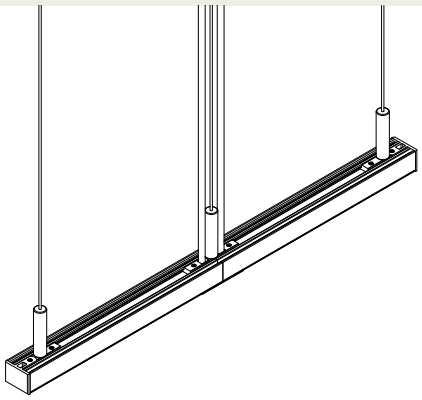

COMPONENTS & HARDWARE


J-BOX FEED	J-BOX NON-FEED	TBAR-J-BOX FEED
		

TBAR-NON-FEED	LAG SCREW-NON-FEED
	

STANDARD J-BOX


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

CONTINUOUS WIRING CONFIGURATION OPTIONS

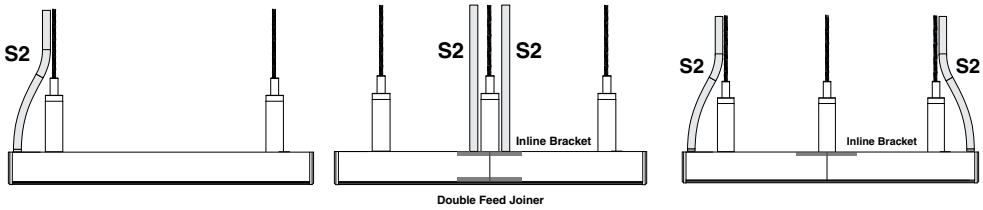

Review wire method to ensure clean installation prior to mounting extrusion.

NOTE: Additional wire methods include:
S2: Connector/Wire Input only


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS SUSPENDED

Linear Fixture Suspended Installation Instructions

INLINE CONNECTOR

- After installing inline bracket, proceed to specific kit install guide

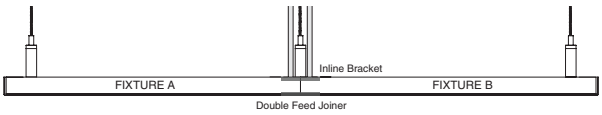


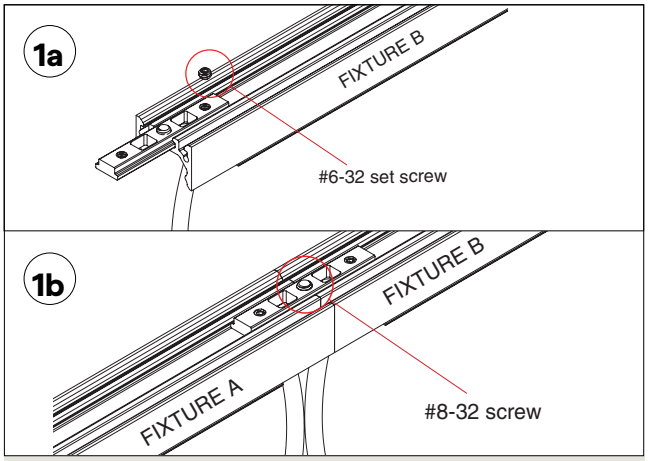

a. Slide the inline bracket into Fixture B's track and screw the #6-32 set screw into the inline bracket, don't screw down the set screw fully until finishing the following steps.


b. Slide Fixture A onto the inline bracket. Don't screw down the second set screw fully until finishing the following steps.

NOTE: Keep the #8-32 thread centered between the two fixtures

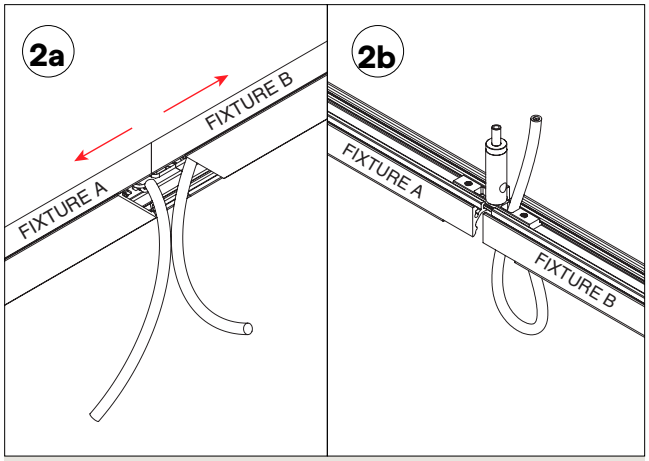


a. Slide the fixture outward to create a gap between Fixture A and Fixture B.

b. This will give you enough room to feed the wire through the bottom of the extrusion and through the inline bracket.

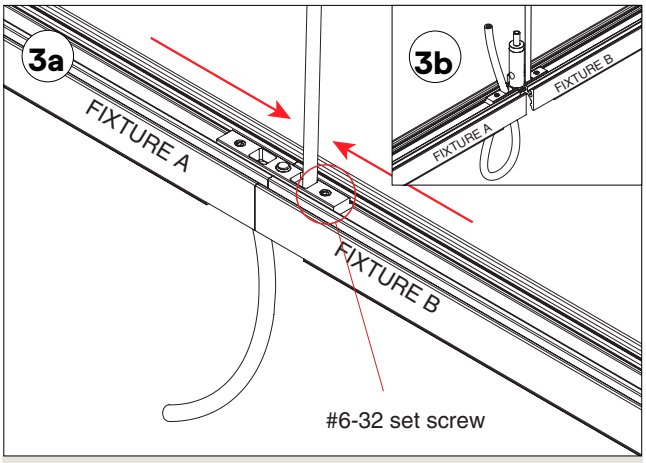

a. After feeding the power feed through the inline bracket completely, close the gap you've made so it is snuggly clamping the outer jacket of the wire that has been fed through. Fully screw down the corresponding set screw so that the connection is secure.

b. Repeat Step 2 and 3 to feed the second power feed through.

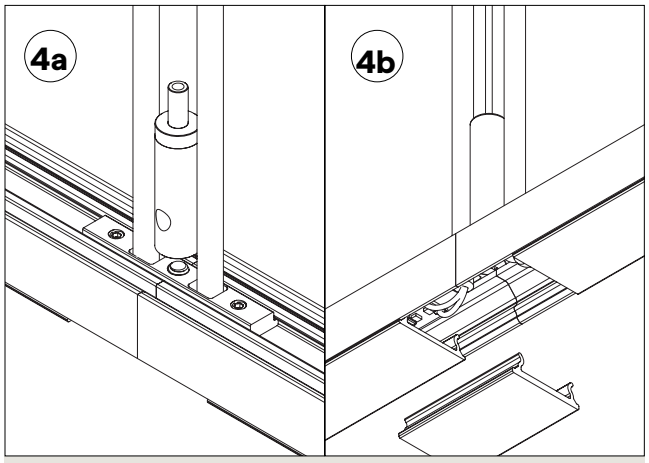


a. Install the cable gripper by screwing it into the #8-32 screw that is located in the center of the inline bracket.


b. Snap on double feed joiner.

Continue install with kit specific guide.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JBOX INSTALLATION FEED & NON-FEED

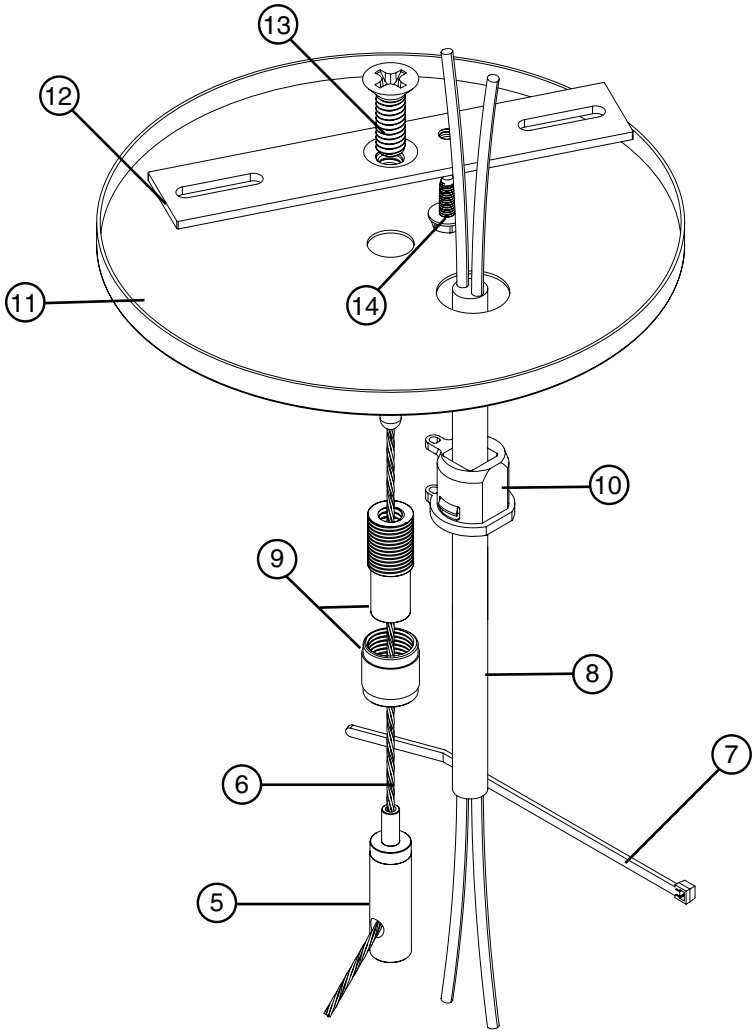

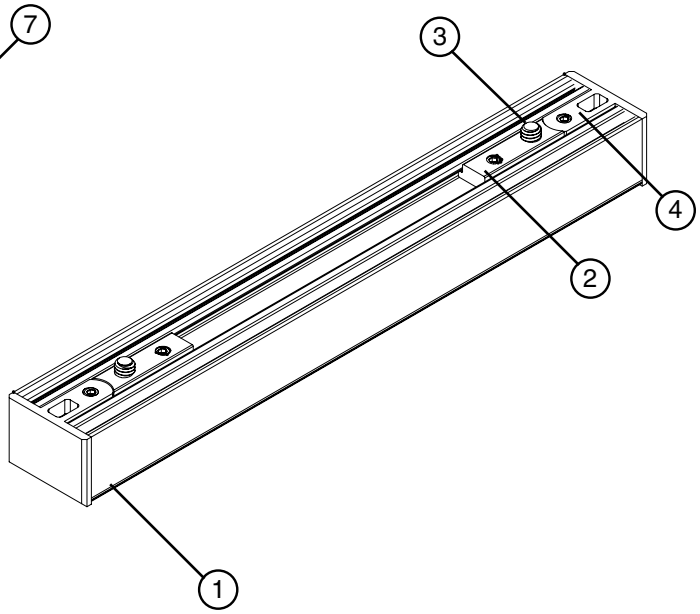


JBOX INSTALLATION SUSPENSION COMPONENTS

1. VERS
2. Suspension Bracket
3. #8-32 Screw
4. Endcap
5. Cable Gripper
6. 1/16" cable
7. Tie
8. Lead Wire
9. Wire Coupler
10. Strain Relief
11. Canopy
12. Crossbar
13. #1/4"-20 Screw
14. Ground Screw


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JBOX INSTALLATION FEED & NON-FEED

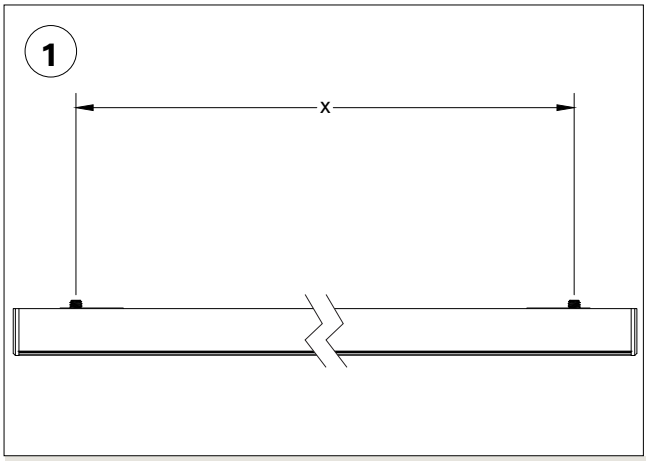


Measure the distance between the two #8-32 screws from the suspension brackets (center to center). Use this measurement to decide where to install the junction box (powered feed) and the non-feed mounting components.

NOTE: Mount the JBOX first. Keep in mind that the cable coupler mounts to the center of the junction box, approx. 2 ". inward of a 4 " JBOX.

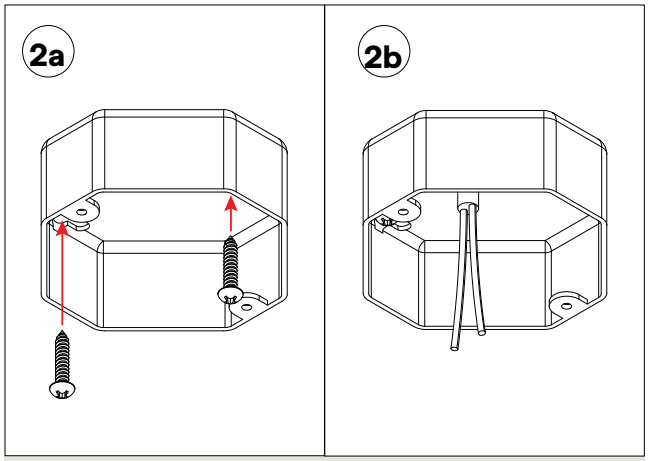


a. Install the junction box

b. Feed the wire from the power supply into the mounted junction box

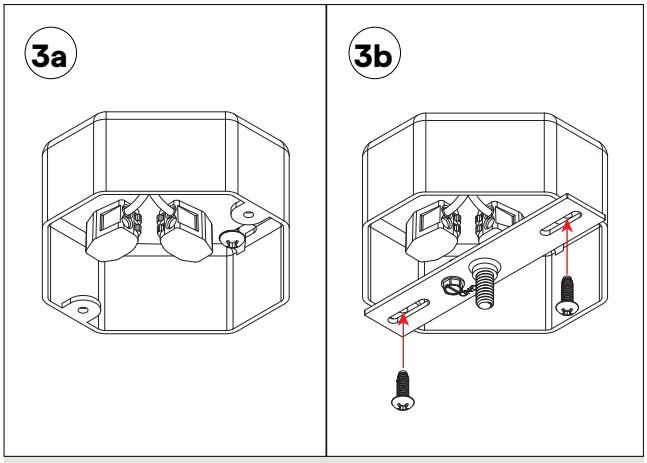

a. Connect WAGO's to the lead wire from the power supply. (For feed JBOX only)

b. Mount the cross bar into the junction boxes (feed and non-powered feed JBOX)

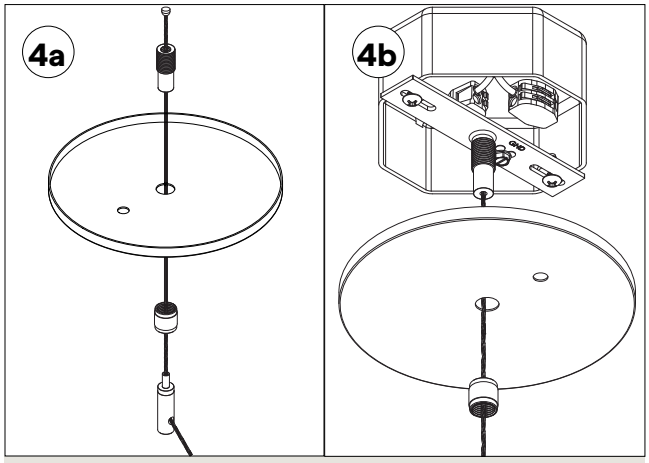


a. Slide the braided cables through the cable grippers and 2 piece cable coupler, leaving the canopy between the 2 coupler pieces.

b. Screw the top part of the coupler into the crossbar's #1/4"-20 screw. (powered feed)

NOTE: The braided cable has a stopper on one end. The stopper should be fed as pictured above.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JBOX INSTALLATION FEED & NON-FEED

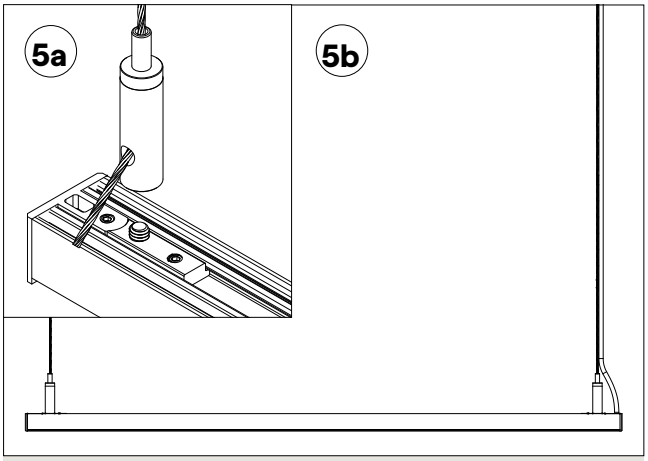


a. Screw down the cable grippers onto the suspension bracket's #8-32 screw.

b. Raise the VERS to its desired height. Push on the top of the cable gripper to lower the fixture.

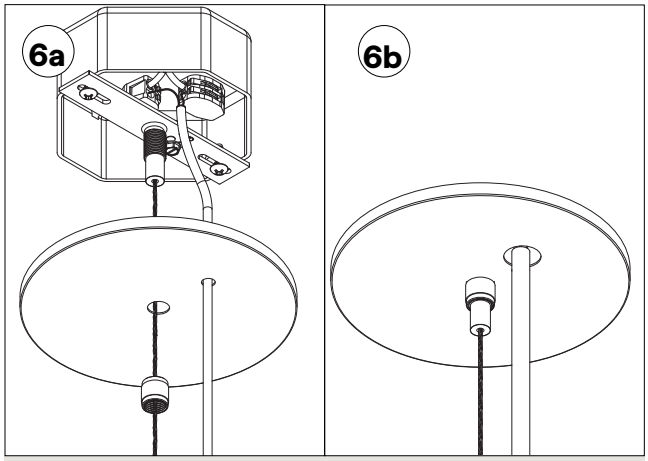


a. Take the power cable from the VERS and feed through the canopy and connect to the WAGO within JBOX (For feed JBOX only)

b. Screw in the bottom piece of the couplers for both feeds. This should pull the canopy toward the ceiling's surface.

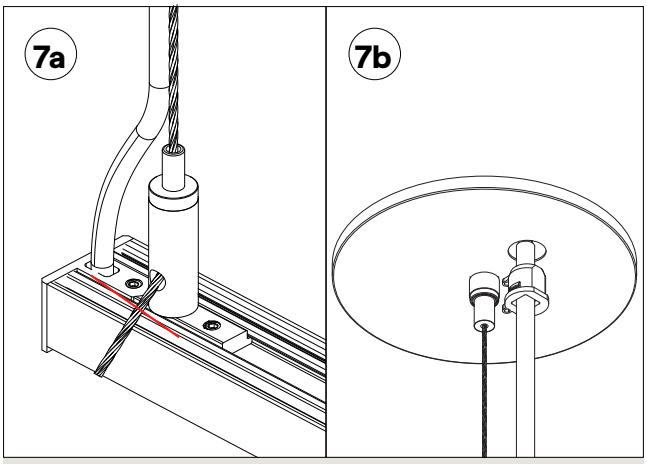

a. When the VERS is at the desired height and well aligned. cut off the excess cable.

b. Snap on the wire strain to the VERS' lead wire and push into the canopy. (For feed JBOX only)

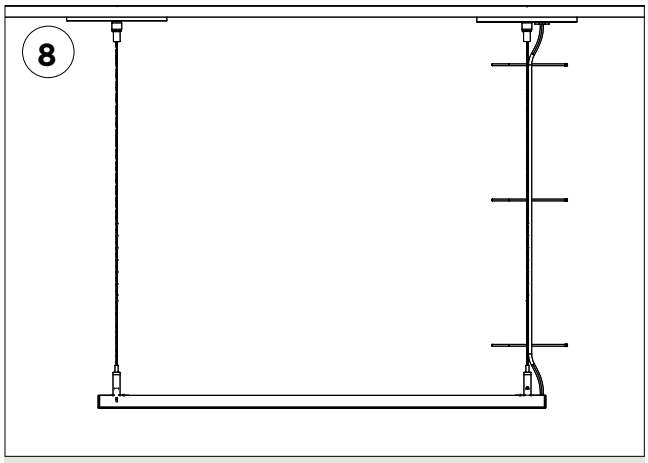

Using the supplied ties, secure the power feed to the suspension cable. (For feed JBOX only)


NOTE: This step is optional


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS SUSPENDED


Linear Fixture Suspended Installation Instructions

TB-JBOX INSTALLATION FEED & NON-FEED

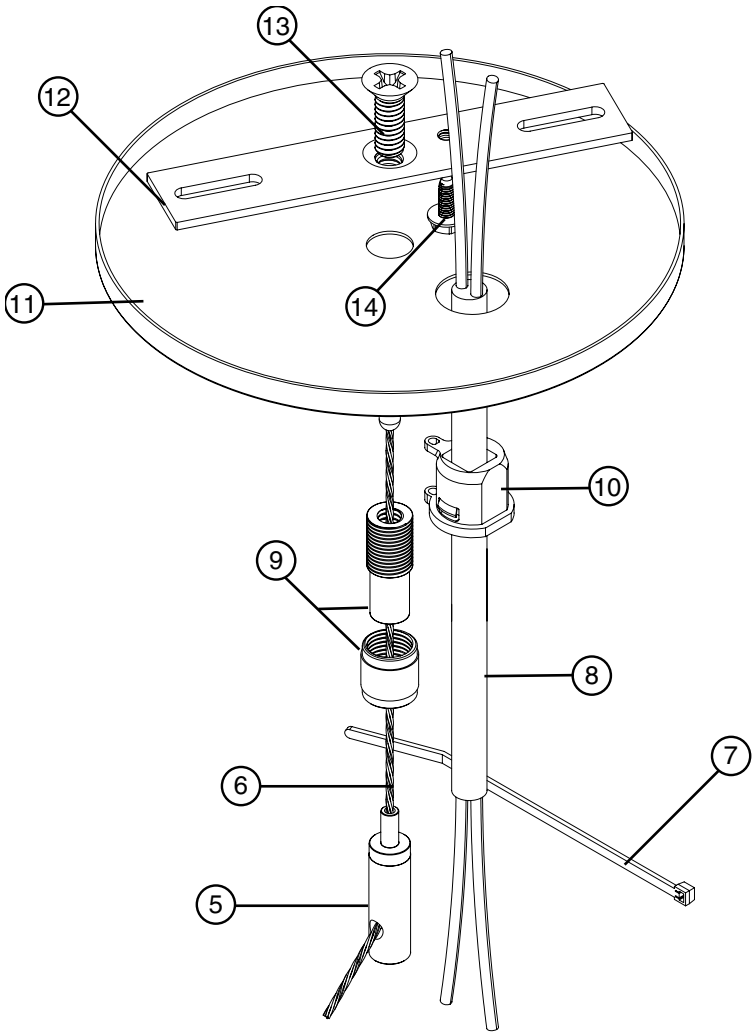

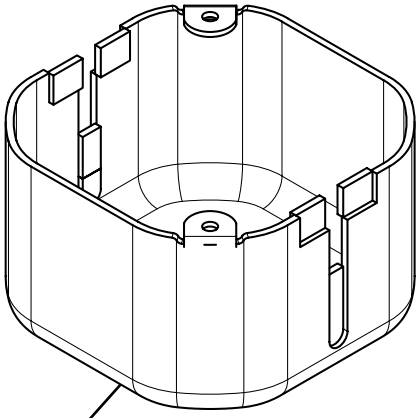

15 T-Bar mounted Junction Box

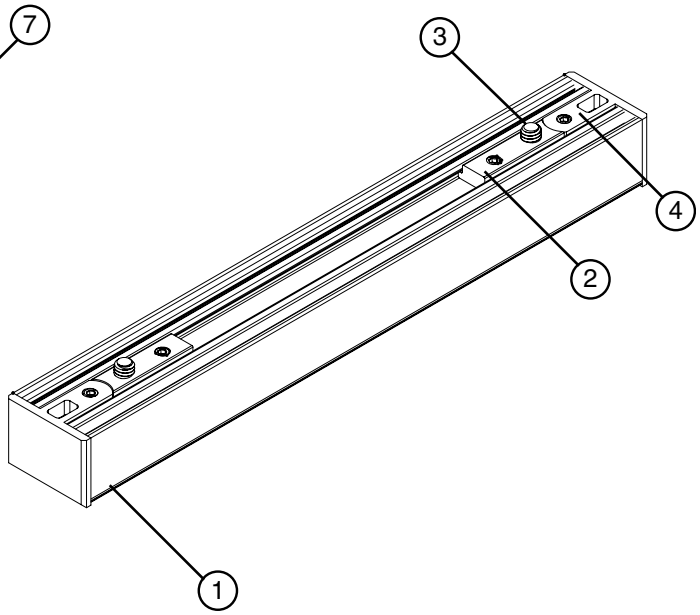

TB-JBOX INSTALLATION SUSPENSION COMPONENTS


1. VERS
2. Suspension Bracket
3. #8-32 Screw
4. Endcap
5. Cable Gripper
6. 1/16" cable
7. Tie
8. Lead Wire
9. Wire Coupler
10. Strain Relief
11. Canopy
12. Crossbar
13. #1/4"-20 Screw
14. Ground Screw
15. T-BAR mounted Junction Box

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS SUSPENDED


Linear Fixture Suspended Installation Instructions

TB-JBOX INSTALLATION FEED & NON-FEED

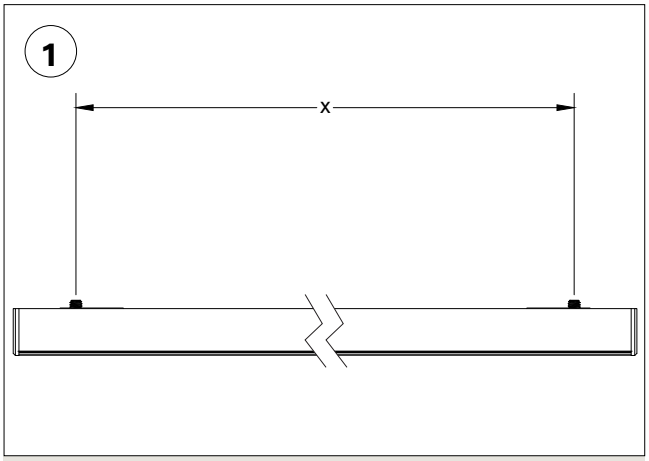


Measure the distance between the two #8-32 screws from the suspension brackets (center to center) Use this measurement to decide where to install the junction box (powered feed) and the non-feed mounting components.

NOTE: Mount the JBOX first. Keep in mind that the cable coupler mounts to the center of the junction box, approx. 2", inward of a 4" JBOX.

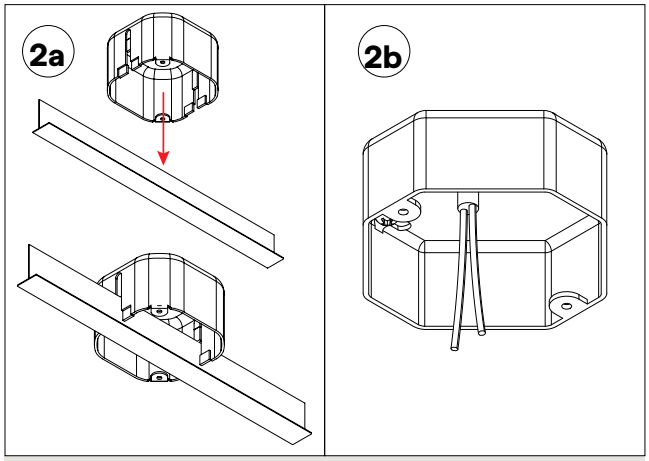


a. Install the T-BAR JBOX by pushing it onto the T-BAR from the top

b. Feed the wire from the power supply into the mounted junction box

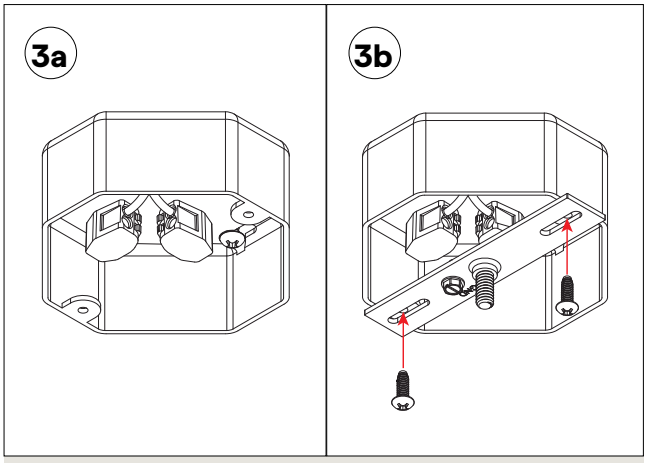

a. Connect WAGO's to the lead wire from the power supply. (For feed JBOX only)

b. Mount the cross bar into the junction boxes (feed and non-powered feed JBOX)

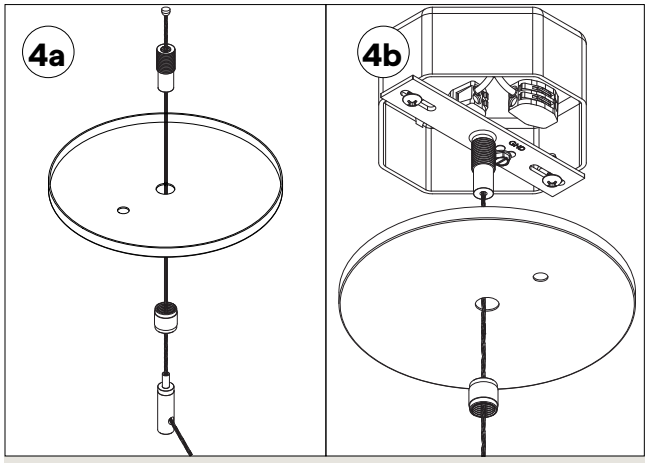


a. Slide the braided cables through the cable grippers and 2 piece cable coupler, leaving the canopy between the 2 coupler pieces.

b. Screw the top pa rt of the coupler into the crossbar's #1/4"-20 screw. (powered feed)

NOTE: The braided cable has a stopper on one end. The stopper should be fed as pictured above.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

TB-JBOX INSTALLATION FEED & NON-FEED CONTINUED

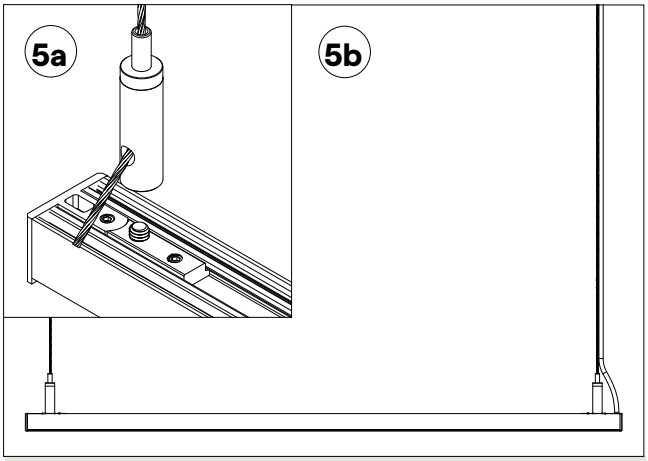


a. Screw down the cable grippers onto the suspension bracket's #8-32 screw.

b. Raise the VERS to its desired height. Push on the top of the cable gripper to lower the fixture.

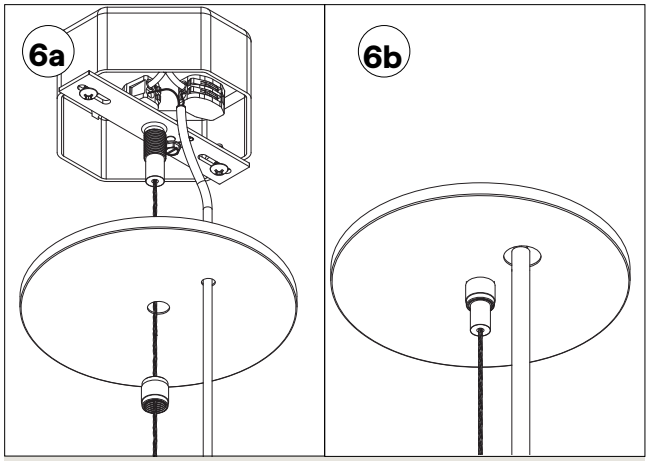


a. Take the power cable from the VERS and feed through the canopy and connect to the WAGO within JBOX (For feed JBOX only)

b. Screw in the bottom piece of the couplers for both feeds. This should pull the canopy toward the ceiling's surface.

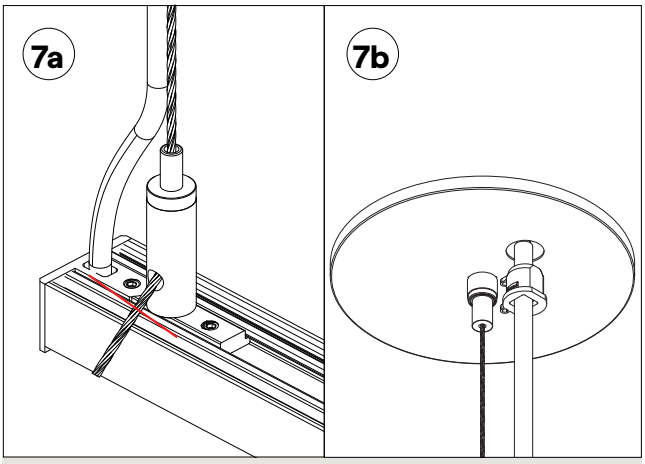

a. When the VERS is at the desired height and well aligned. cut off the excess cable.

b. Snap on the wire strain to the VERS' lead wire and push into the canopy. (For feed JBOX only)

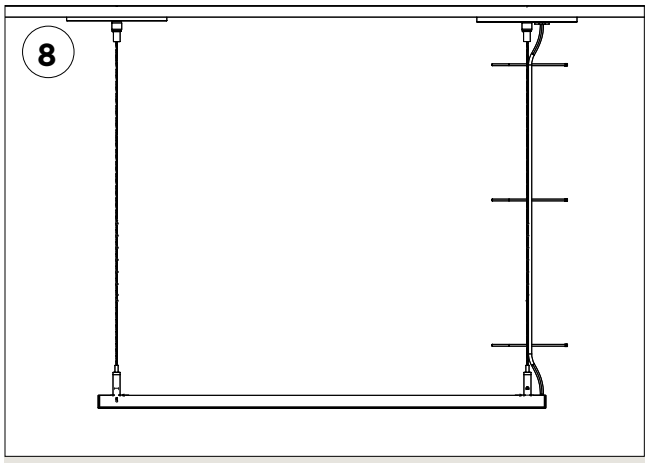


Using the supplied ties, secure the power feed to the suspension cable. (For feed JBOX only)


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS SUSPENDED

Linear Fixture Suspended Installation Instructions

NF-TBAR INSTALLATION

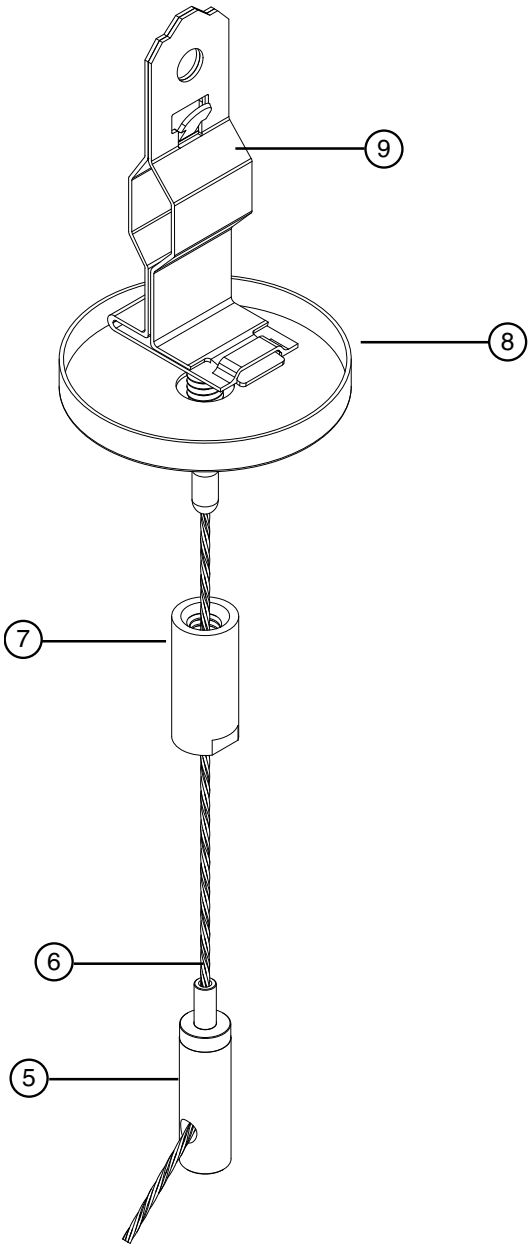

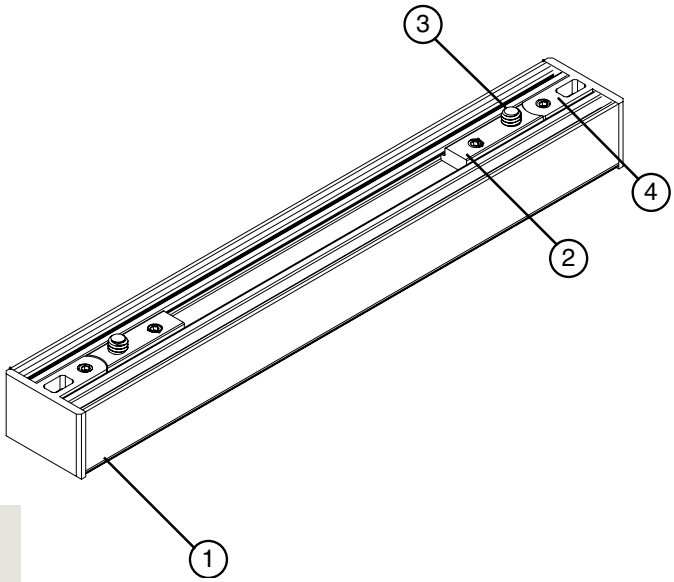

NF-TBAR INSTALLATION SUSPENSION COMPONENTS


1. VERS
2. Suspension Bracket
3. #8-32 Screw
4. Endcap
5. Cable Gripper
6. 1/16" Cable
7. Cable Coupler
8. Canopy
9. T-Bar Clip

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS SUSPENDED


Linear Fixture Suspended Installation Instructions

NF-TBAR INSTALLATION

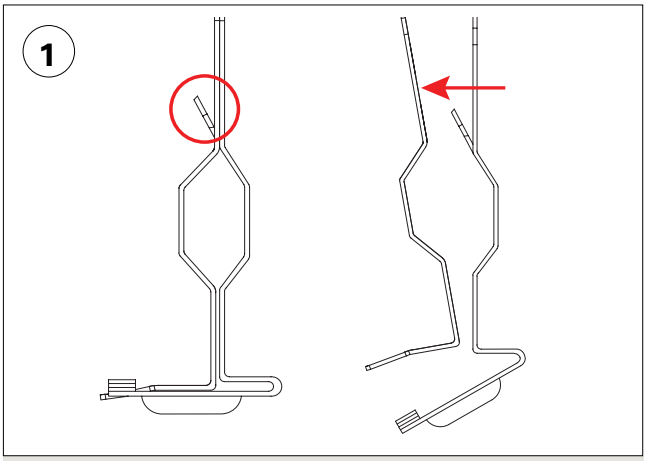


Push upward on the highlighted tab as you squeeze the bottom tab to open up the T-BAR clip.

NOTE: Verify the mounting location prior to snapping on the T-BAR clip, as it is very difficult to open back up once it has been mounted.

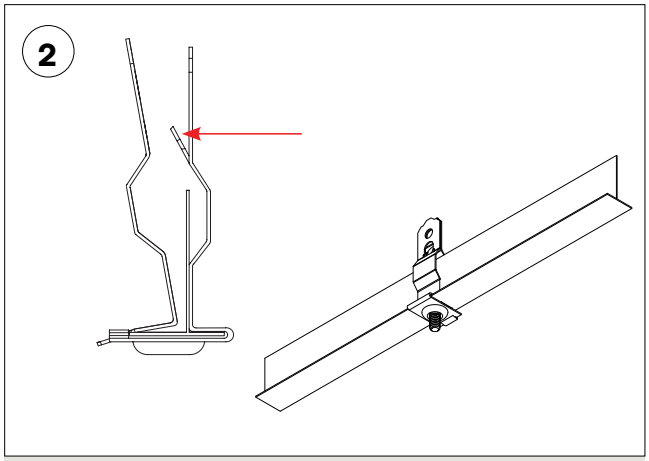


Wrap the two parts of the clip around the T-BAR then push inward on the highlighted tab to snap them together in place.

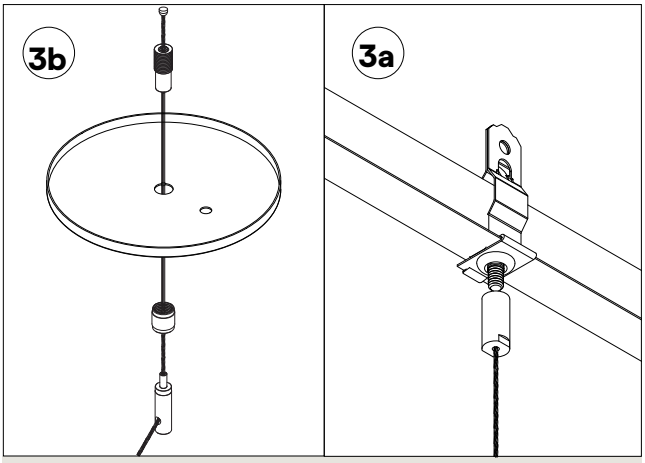

a. Slide the braided cables through the cable grippers and 2 piece cable coupler, leaving the canopy between the 2 coupler pieces.

b. Screw the top part of the coupler into the T-BAR clip's #1/4"-20 screw.

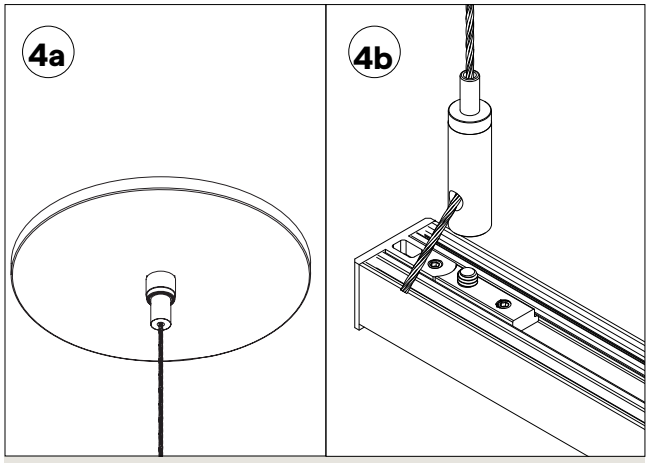

a. Screw in the bottom piece of the couplers. This should pull the canopy toward the ceiling's surface


b. Screw down the cable grippers onto the suspension bracket's #8-32 screw.


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

VERS SUSPENDED

Linear Fixture Suspended Installation Instructions

LAG SCREW INSTALLATION

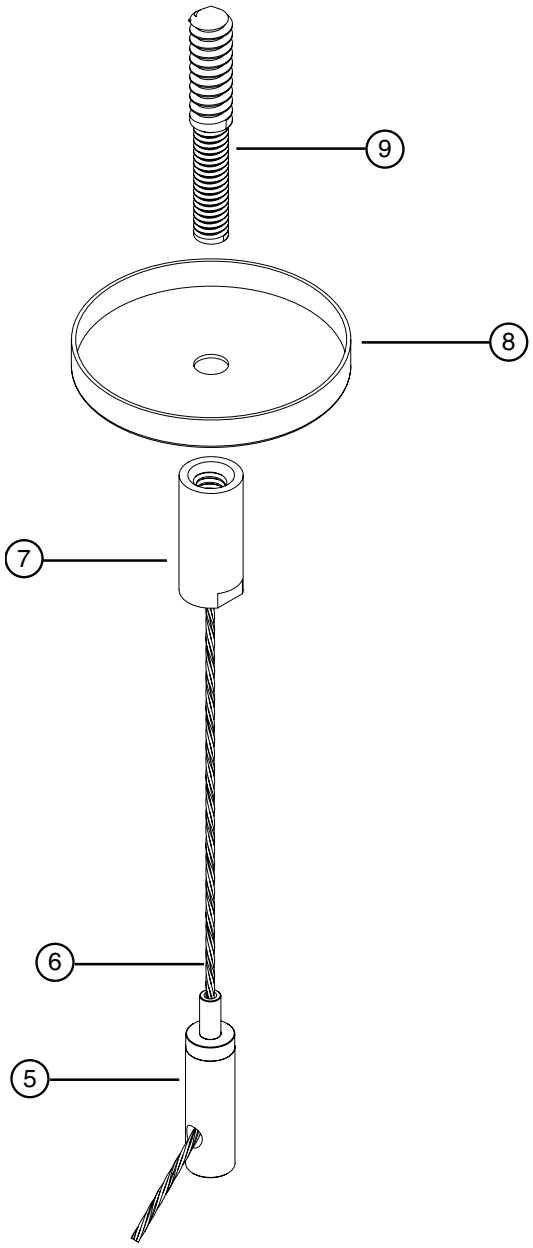

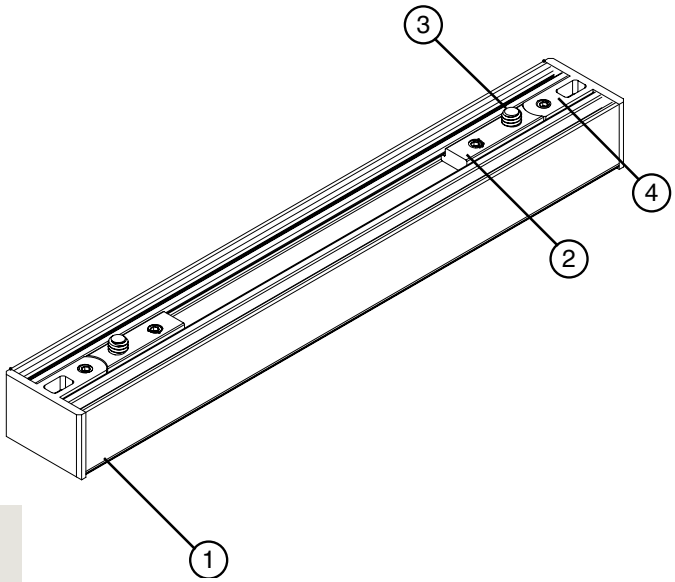

NF-TBAR INSTALLATION SUSPENSION COMPONENTS


1. VERS
2. Suspension Bracket
3. #8-32 Screw
4. Endcap
5. Cable Gripper
6. 1/16" Cable
7. Cable Coupler
8. Canopy
9. Lag Screw

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


VERS SUSPENDED

Linear Fixture Suspended Installation Instructions


LAG SCREW INSTALLATION

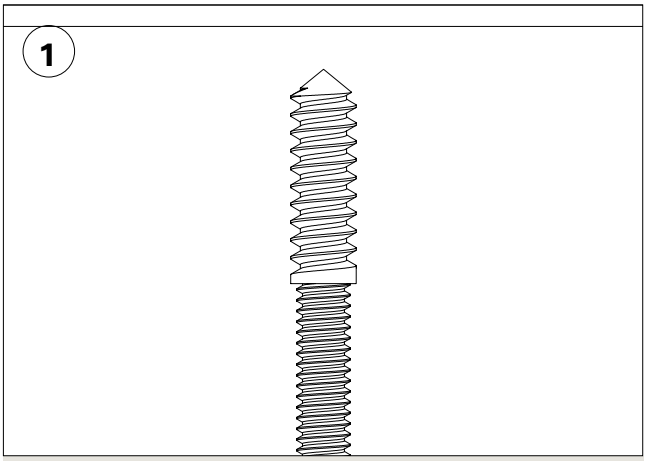


Install the mounting point for the non-powered feed.

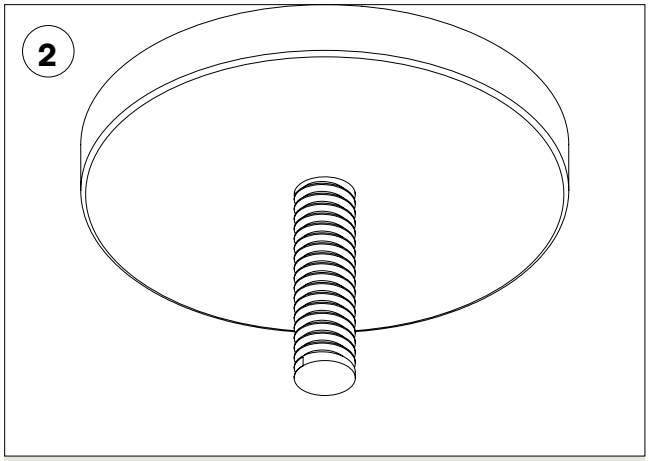

Slide the canopy over the lag screw.

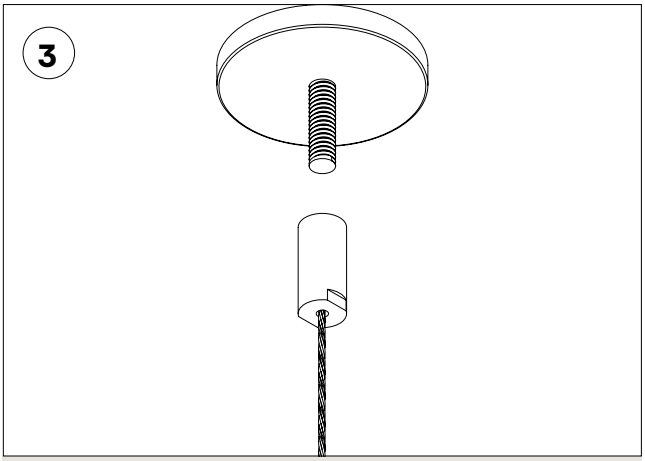

Screw the coupler into the #1/4"-20 screw to keep canopy in place.

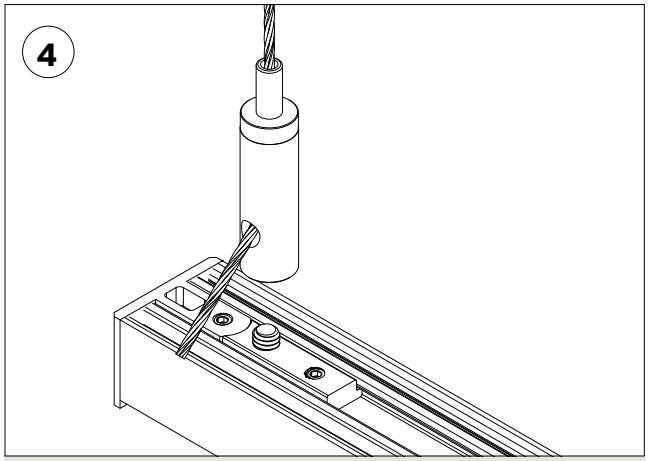

Screw down the cable grippers onto the suspension bracket's #8-32 screw.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting