

NU-GRAZER

U BRACKET - ALUMINUM EXTRUSION

RoHS COMPLIANT





- U Brackets offer a taller reveal to hide the fixture and mounting hardware
- Mounts a large family of grazer fixtures
- Best for wall applications
- Brackets surface mount from the side via included wall mounting clip
- Paintable finish
- Intended for indoor use only
- Screw mounting track for field installation fixtures
- Inline bracket slot for seamless run connections

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NU-GRAZER		

Sample Part Number: **NU-GRAZER-ST-48"**

1 PRODUCT

NU-GRAZER


2 FINISH

ST	Satin
BK	Black


3 LENGTH (IN)

1" increments from 2" - 98.43"
Tolerance +0.0"/-0.5"
Light engine ordered separately


1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES




Profile



Profile with: ALTA-02



Profile with: TORQ-02



Profile with: VERS-04

Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void | Corner/surface mount

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-03-12-24

NU-GRAZER





U BRACKET - ALUMINUM EXTRUSION

2 FINISH

Satin


Black

COMPATIBILITY CHART


	 ATOM-02	 ALTA-02	 LALO-02	 VERS-04	 TORQ-02
Lens Notes	Works with: ATOM-02	Works with: ALTA-02	Works with: LALO-02	Works with: VERS-04	Works with: TORQ-02
SST-01 Stainless Steel Clip			✔		✔
SST-08 Stainless Steel Clip	✔	✔			
CC-01 Concealed Clip				✔	
VHB	✔		✔		✔

PHOTOMETRIC PERFORMANCE


Order separately | Tested with SW24/5.0 at 3000K & MICRO-SW24/4.0 at 3000K

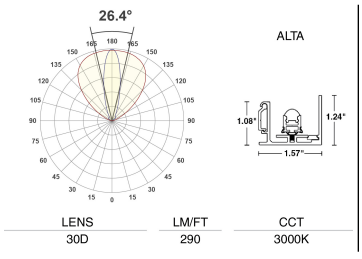


LENS	LM/FT	CCT
30D	290	3000K

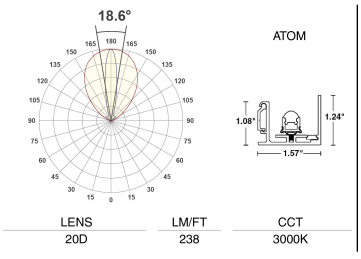


LENS	LM/FT	CCT
20D	238	3000K

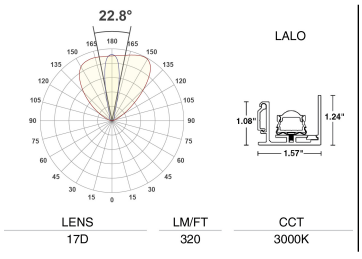


LENS	LM/FT	CCT
17D	320	3000K

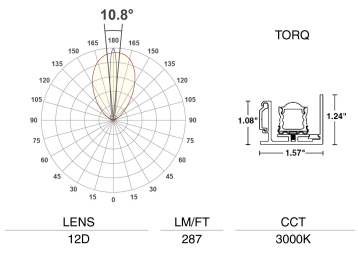

LENS	LM/FT	CCT
12D	287	3000K

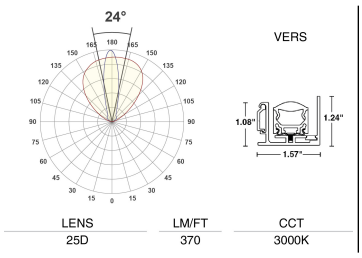

LENS	LM/FT	CCT
25D	370	3000K

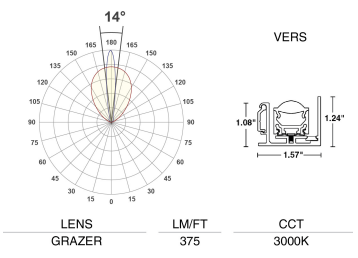


LENS	LM/FT	CCT
GRAZER	375	3000K

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

NU-GRAZER

U BRACKET - ALUMINUM EXTRUSION

JOINER/CONNECTORS




Inline Bracket

1 per length included

6/32" stainless steel, flat tip set screws, 1/8" long

WALL MOUNT

PLC-06



U-Bracket Wall Mounting Clip


2 provided for 4' or less; 4 provided for greater than 4'

Each clips comes with a #6 x 3/4" Rounded Head screw.

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

JLU BRACKET

Installation Instructions

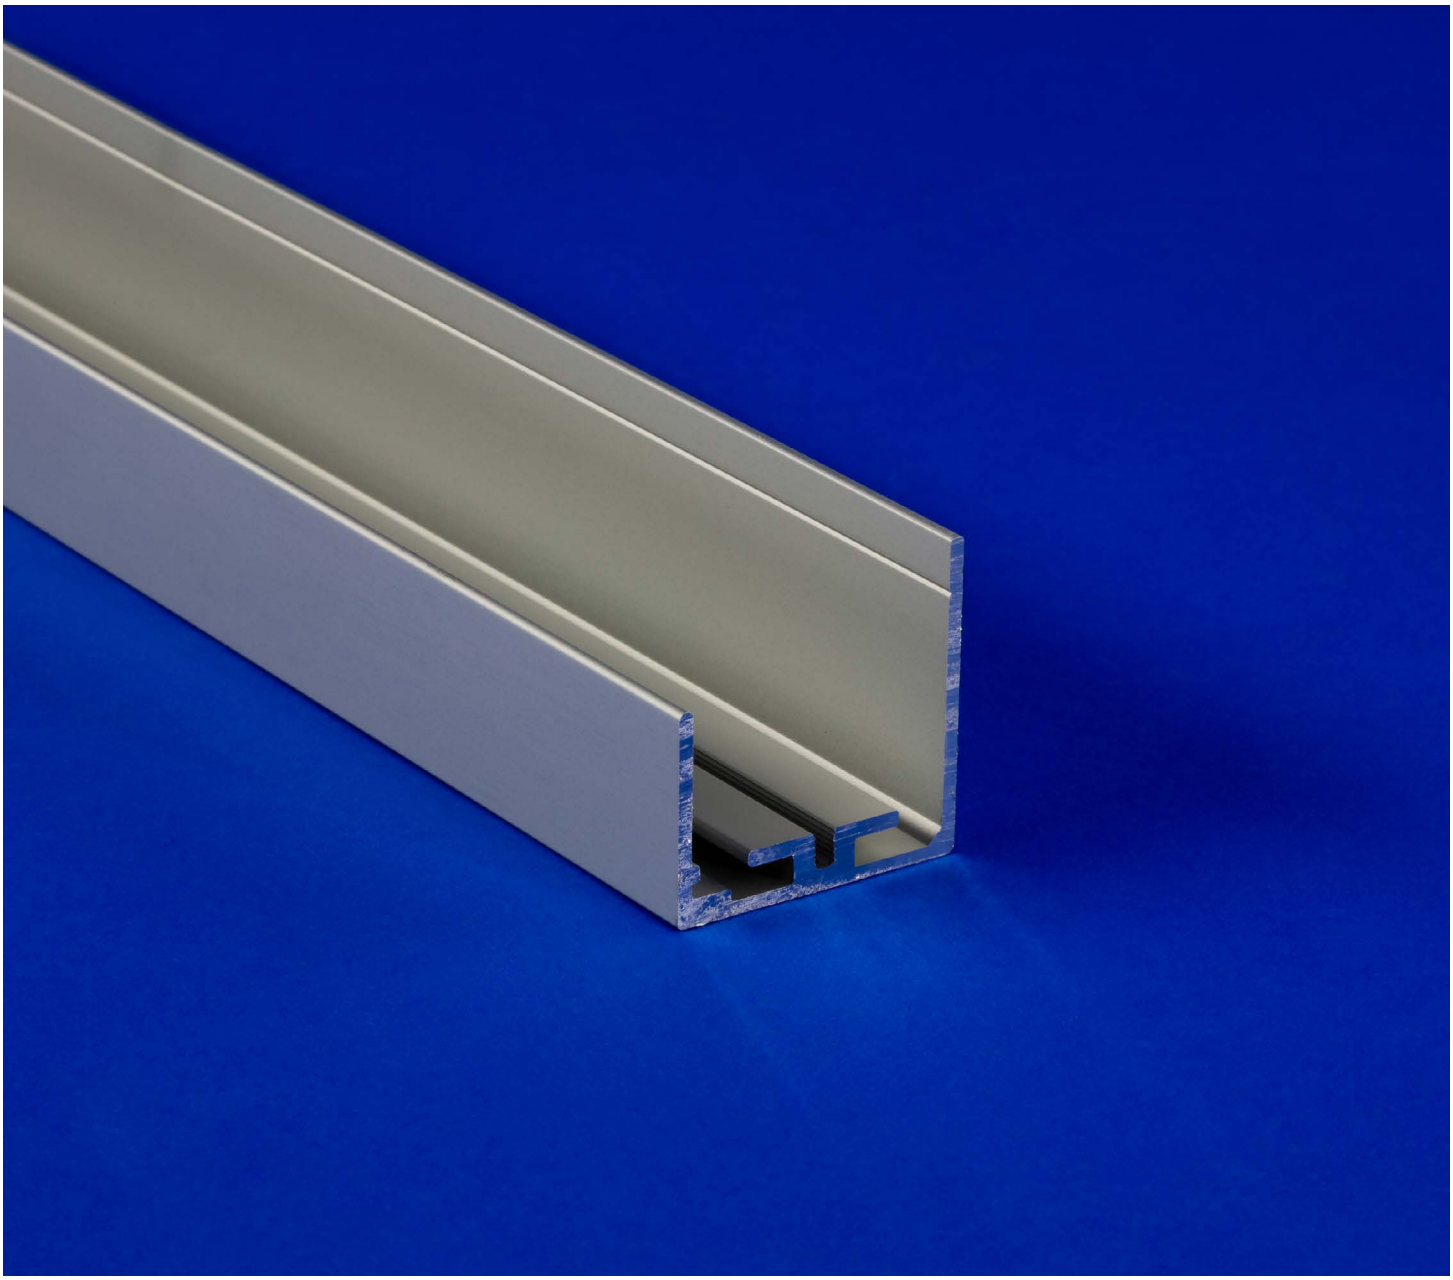



NJ-GRAZER



NJ-LARGE



NJ-MICRO




NJ-STANDARD



NL-LARGE



NL-MICRO



NU-GRAZER




NU-LARGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


Specification subject to change. Rev-08-12-26

JLU BRACKET


Installation Instructions




NJ-GRAZER




NJ-LARGE



NJ-STANDARD




NJ-MICRO



NL-LARGE



NL-MICRO







NU-GRAZER



NU-LARGE

COMPONENTS & HARDWARE

HARDWARE	
SS FLAT HEAD PHILLIPS #6x3/4”	U-BRACKET WALL MOUNTING CLIP
	

ACCESSORIES
INLINE CONNECTOR
 


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JLU BRACKET

Installation Instructions


WALL MOUNTING - J & L - WITH CLIPS

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'
- If using multiple lengths, see **pg 5**

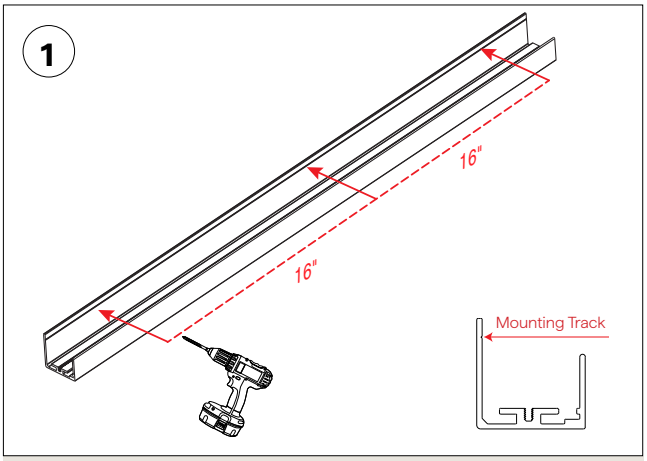


Predrill holes, 16" on the center, into the mounting screw track.


NOTE: if installing outdoors, drill holes of at least 1/8" in diameter every 16" to allow water egress. Ensure water can flow out of the bracket.

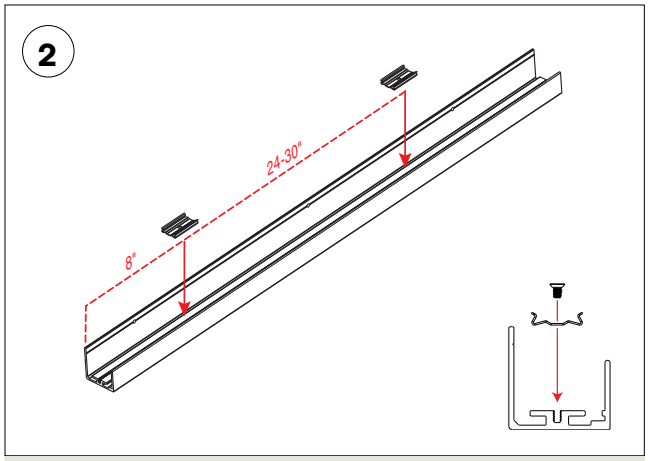

Mount the appropriate clips for the fixture. 2 clips for 4' or less, 4 clips for 8' or less.

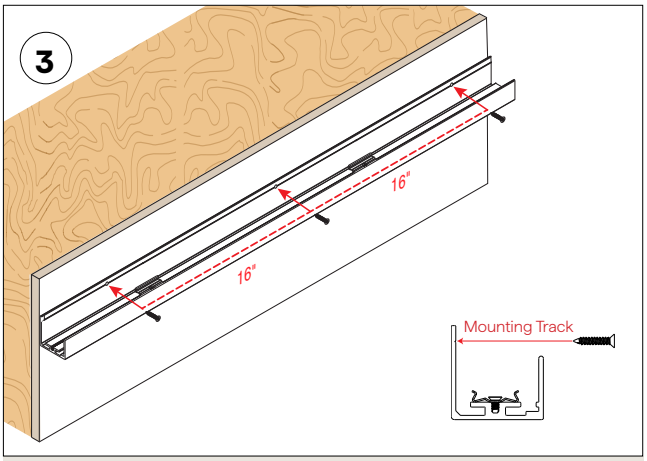

Use the predrilled holes to mount the bracket on to the wall

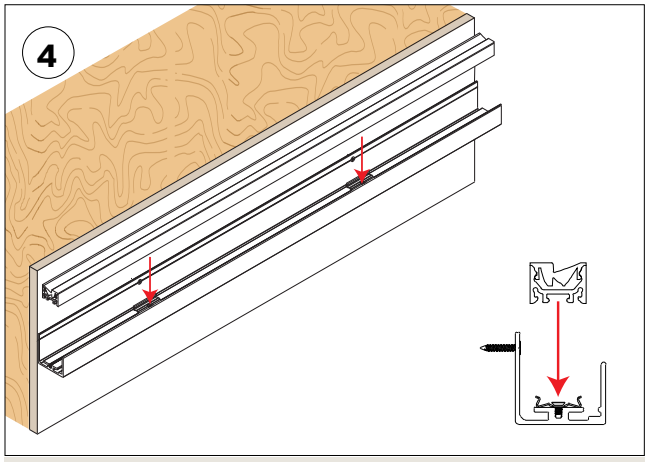

Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JLU BRACKET


Installation Instructions

WALL MOUNTING BRACKET - U

- If using multiple lengths, see **pg 5**

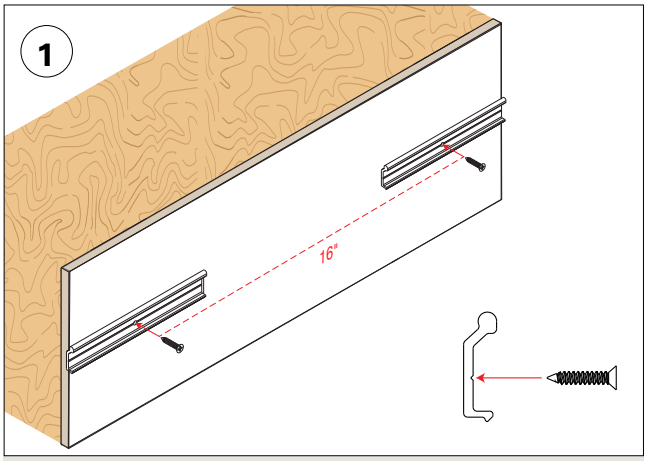


Mount each clip 16" from the center. Refer to **Steps 1 & 2 on pg 3** to prepare the bracket for wall mounting.

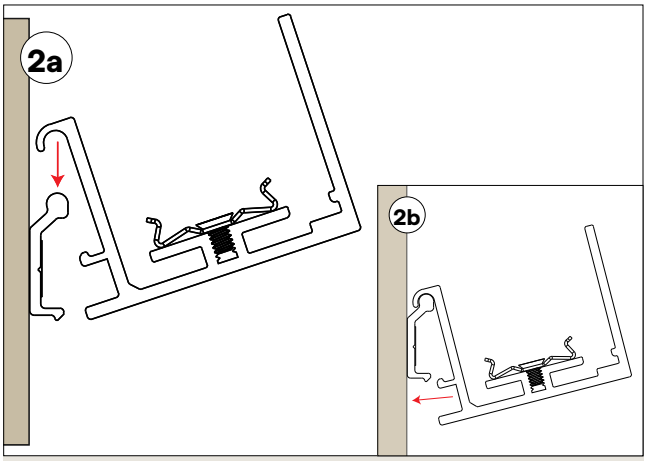

Mount the U Bracket onto the wall mount clip by:

A. Hook in the top portion of the U Bracket onto the top of the mounting clip.

B. Snap the bottom part of the bracket on to the clip, to engage the locking mechanism.

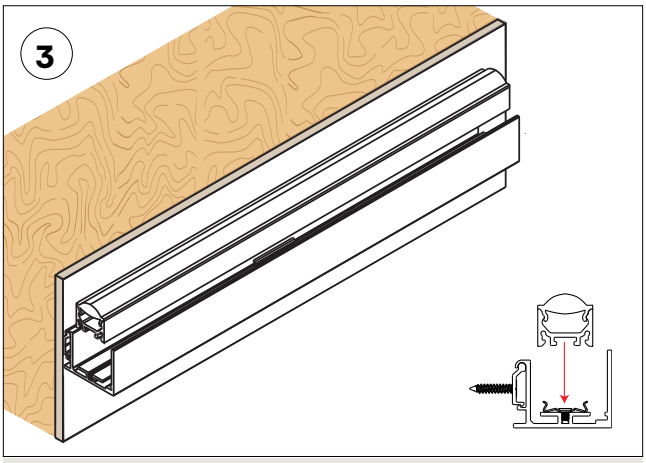

Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.


NOTE: if installing outdoors, drill holes of at least 1/8" in diameter every 16" to allow water egress. Ensure water can flow out of the bracket.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


JLU BRACKET

Installation Instructions


INLINE-CONNECTOR FOR J, L, & U BRACKET

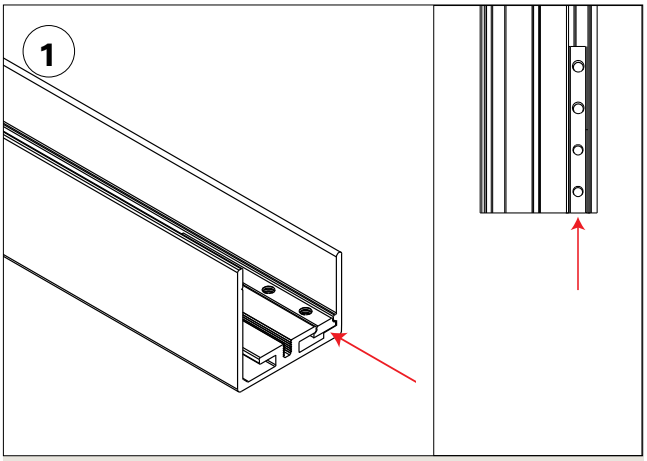


Slide the inline connector into the inline connector slot of the mounted run.

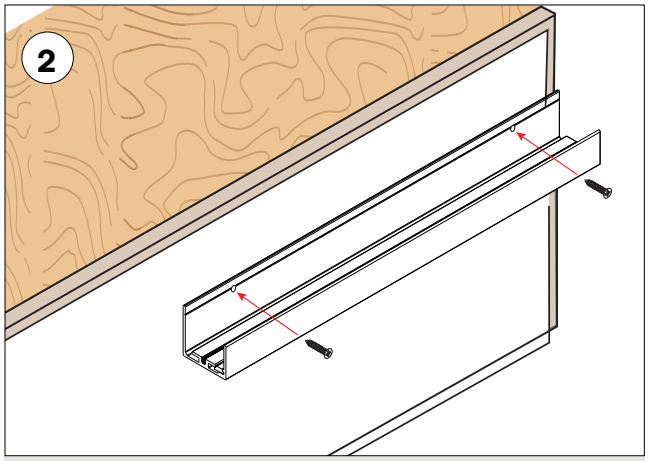

Mount the bracket on to the wall. Refer to **Steps 1 & 2 on pg3** to prepare bracket for wall mounting.

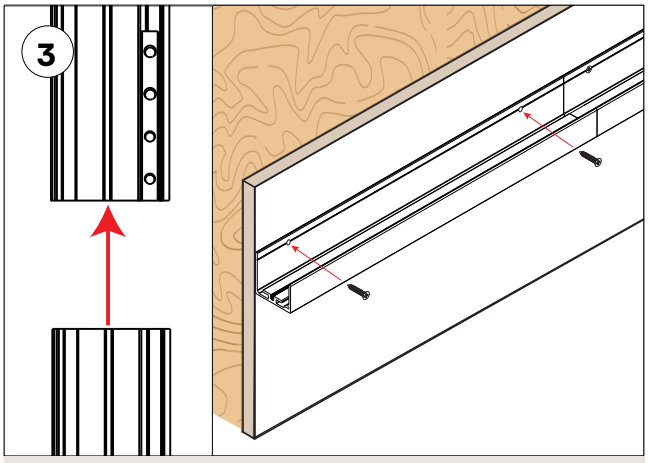

Mount the second bracket to the wall.

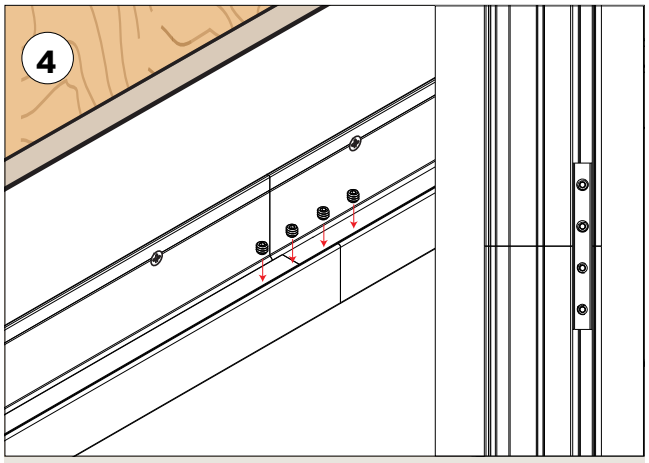

Complete by sliding the inline connector into position to join both brackets. Secure by fastening all set screws, then mount the fixture onto the mounting clips.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting