

NU-LARGE

U BRACKET - ALUMINUM EXTRUSION





- U Brackets offer a taller reveal to hide fixtures and mounting hardware
- Mounts a large family of fixtures
- Best for wall applications
- Brackets surface mount from the side via included wall mounting clip
- Paintable finish
- Suitable for indoor and outdoor use. Follow installation requirements for outdoor applications
- Screw mounting track for field installation fixtures
- Inline bracket slot for seamless run connections

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NU-LARGE		

Sample Part Number: **NU-LARGE-ST-48"**

1 PRODUCT

NU-LARGE


2 FINISH

ST	Satin
BK	Black


3 LENGTH (IN)

1" increments from 2" - 98.43"
Tolerance +0.0"/-0.5"
Light engine ordered separately


1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES




Profile



Profile with: OPTI-02 FT Lens



Profile with: TORQ-01



Profile with: VERS-09

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-01-26

NU-LARGE







U BRACKET - ALUMINUM EXTRUSION

2 FINISH

Satin


Black

COMPATIBILITY CHART

	 OPTI	 TORQ	 BOXA	 KURV	 ZALA	 VERS
Lens Notes	Works with: 40D lens, 60D lens, 70D lens, 90D lens, 110D lens, 155D lens, ASYM lens, FT Lens	Works with: TORQ-01, TORQ-03				Works with: VER-01, VERS-02, VERS-03, VERS-05, VERS-06, VERS-07, VERS-08, VERS-09
SST-01 Stainless Steel Clip	✓	✓				
CC-01 Concealed Clip						✓
WSC White Snug Clip			✓	✓	✓	
VHB			✓	✓	✓	

PHOTOMETRIC PERFORMANCE

Order separately | Tested with SW24/5.0 at 3000K

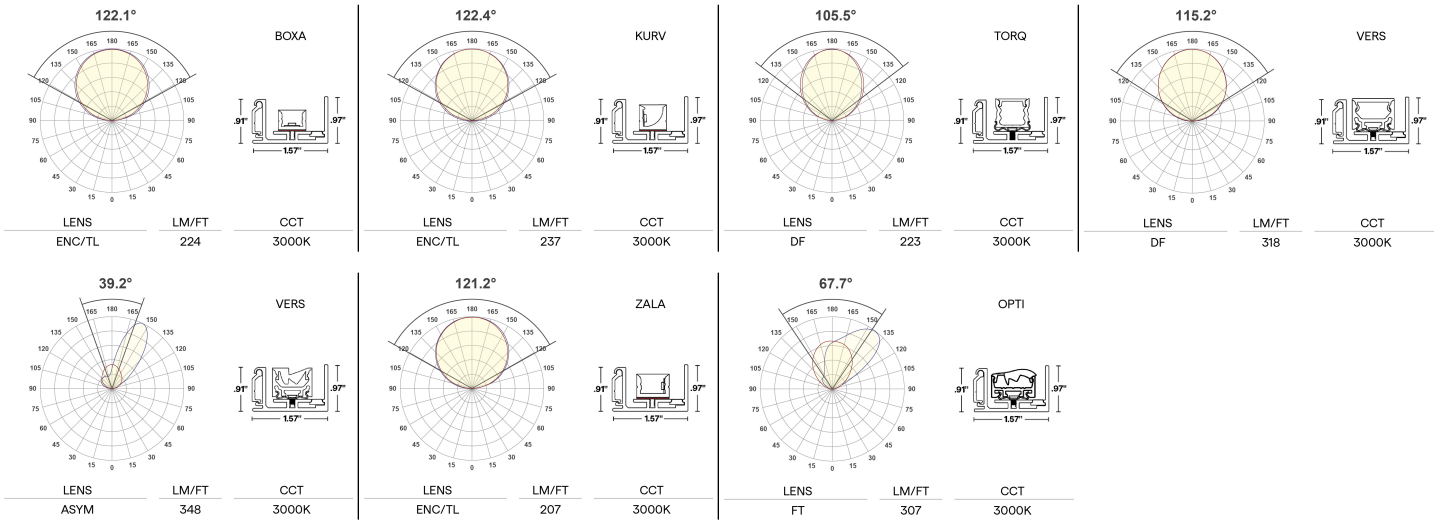


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

NU-LARGE

U BRACKET - ALUMINUM EXTRUSION

JOINER/CONNECTORS




Inline Bracket

1 per length included

6/32” stainless steel, flat tip set screws, 1/8” long

WALL MOUNT

PLC-06



U-Bracket Wall Mounting Clip


2 provided for 4’ or less; 4 provided for greater than 4’

Each clips comes with a #6 x 3/4” Rounded Head screw.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

JLU BRACKET

Installation Instructions

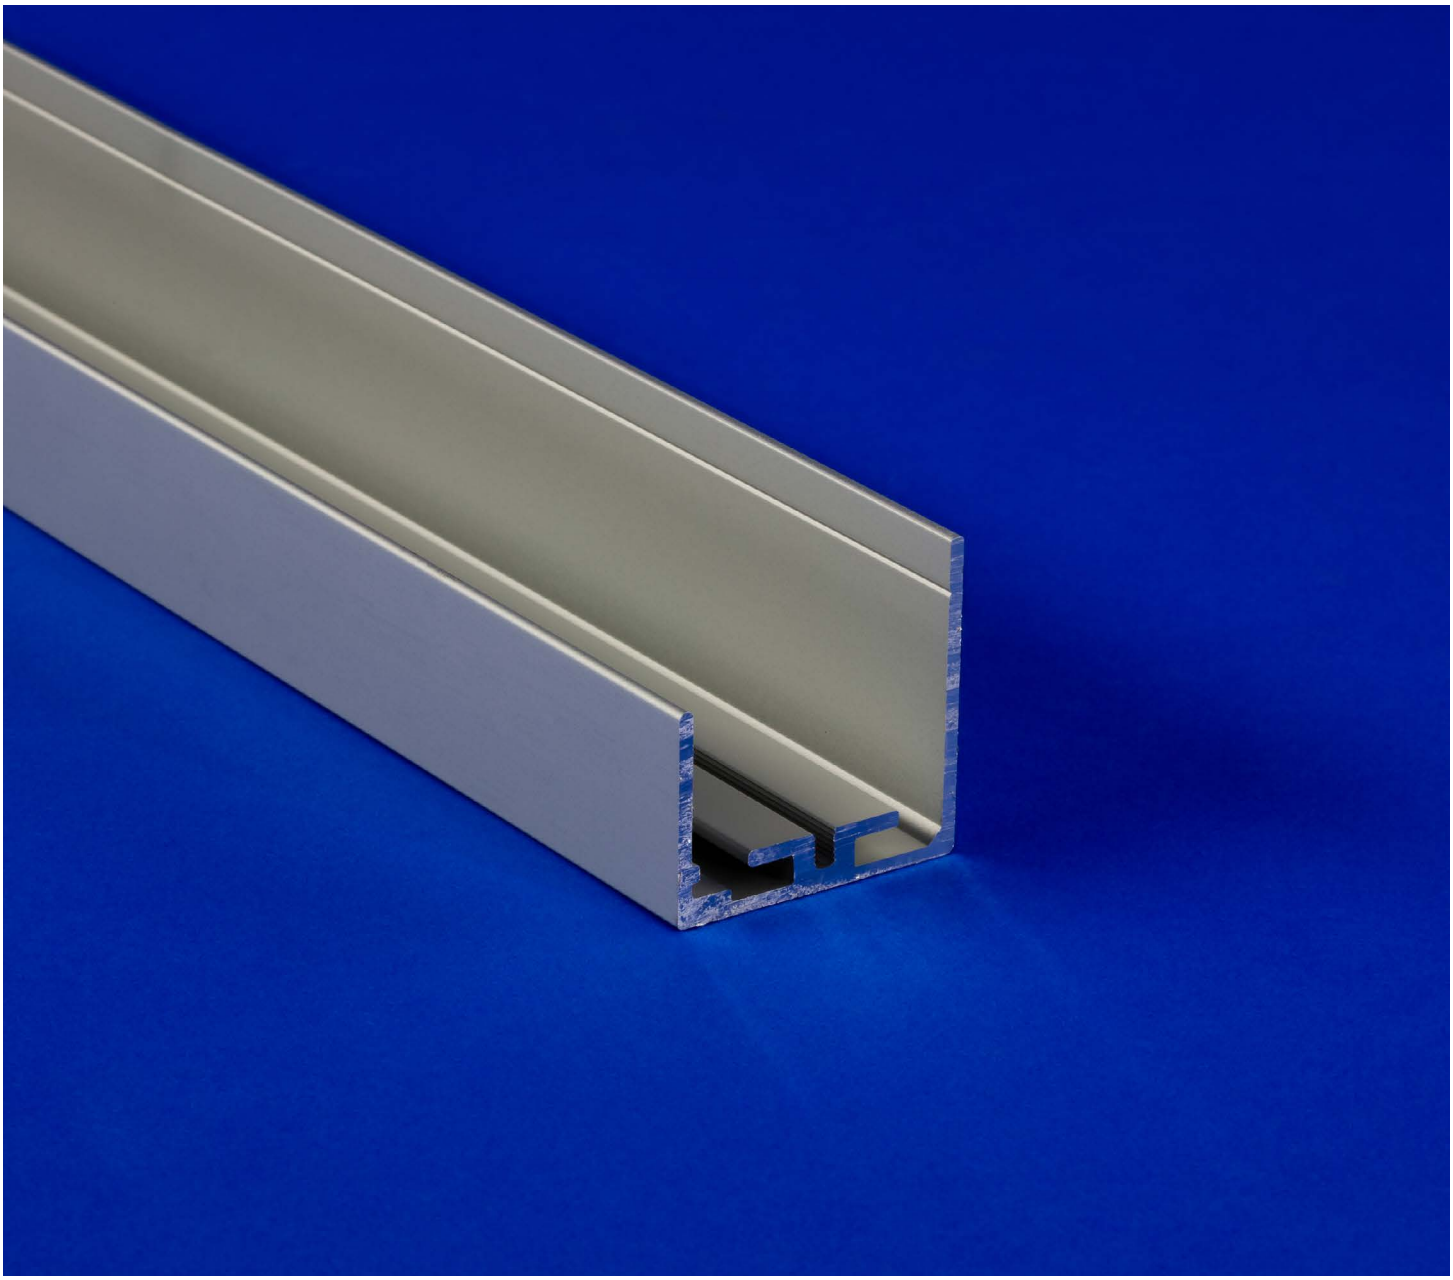



NJ-GRAZER



NJ-LARGE



NJ-MICRO




NJ-STANDARD



NL-LARGE



NL-MICRO



NU-GRAZER




NU-LARGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


Specification subject to change. Rev-08-12-26

JLU BRACKET


Installation Instructions




NJ-GRAZER




NJ-LARGE



NJ-STANDARD




NJ-MICRO



NL-LARGE



NL-MICRO







NU-GRAZER



NU-LARGE

COMPONENTS & HARDWARE

HARDWARE	
SS FLAT HEAD PHILLIPS #6x3/4”	U-BRACKET WALL MOUNTING CLIP
	

ACCESSORIES
INLINE CONNECTOR
 


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JLU BRACKET

Installation Instructions


WALL MOUNTING - J & L - WITH CLIPS

- 2 clips provided for 4' or less; 4 clips provided for greater than 4'
- If using multiple lengths, see **pg 5**

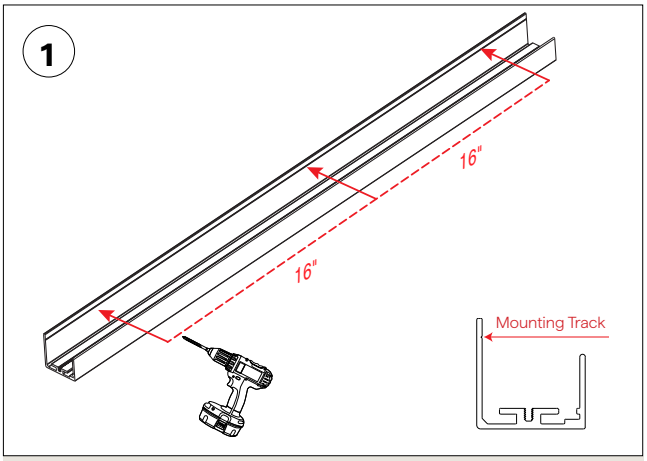


Predrill holes, 16" on the center, into the mounting screw track.


NOTE: if installing outdoors, drill holes of at least 1/8" in diameter every 16" to allow water egress. Ensure water can flow out of the bracket.

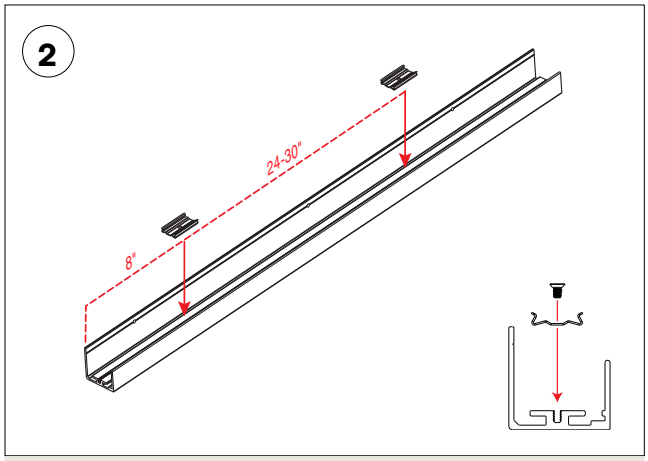

Mount the appropriate clips for the fixture. 2 clips for 4' or less, 4 clips for 8' or less.

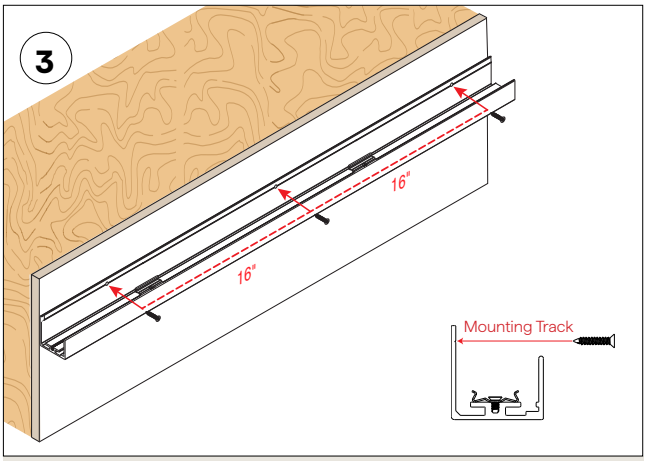

Use the predrilled holes to mount the bracket on to the wall

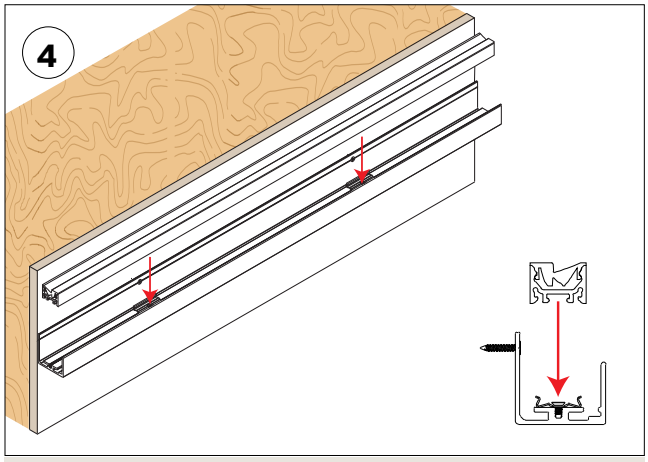

Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

JLU BRACKET


Installation Instructions

WALL MOUNTING BRACKET - U

- If using multiple lengths, see **pg 5**

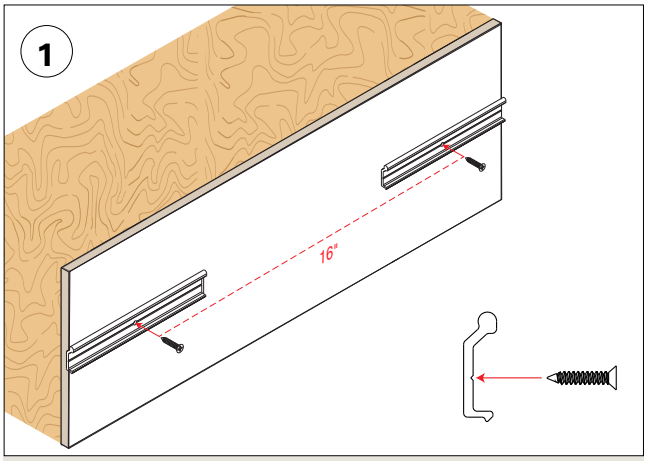


Mount each clip 16" from the center. Refer to **Steps 1 & 2 on pg 3** to prepare the bracket for wall mounting.

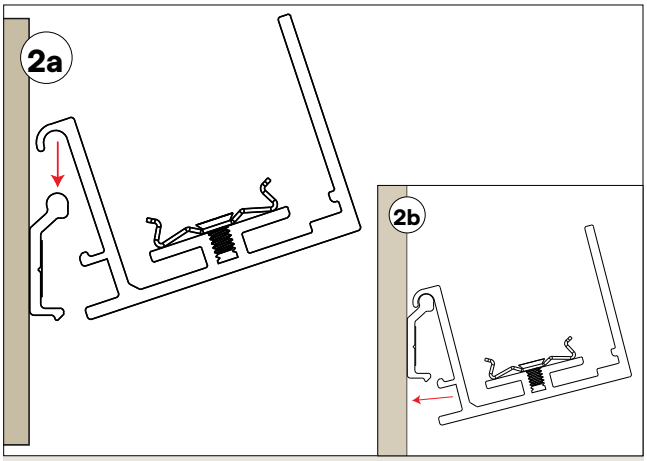

Mount the U Bracket onto the wall mount clip by:

A. Hook in the top portion of the U Bracket onto the top of the mounting clip.

B. Snap the bottom part of the bracket on to the clip, to engage the locking mechanism.

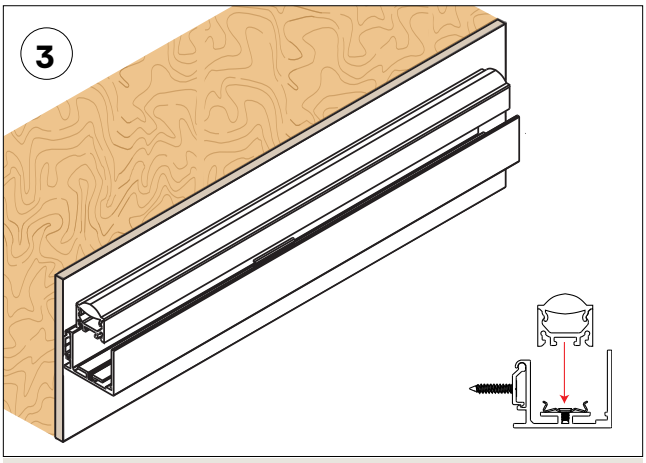

Mount the fixture onto the bracket, refer to fixture installation instructions for any additional steps.


NOTE: if installing outdoors, drill holes of at least 1/8" in diameter every 16" to allow water egress. Ensure water can flow out of the bracket.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


JLU BRACKET

Installation Instructions


INLINE-CONNECTOR FOR J, L, & U BRACKET

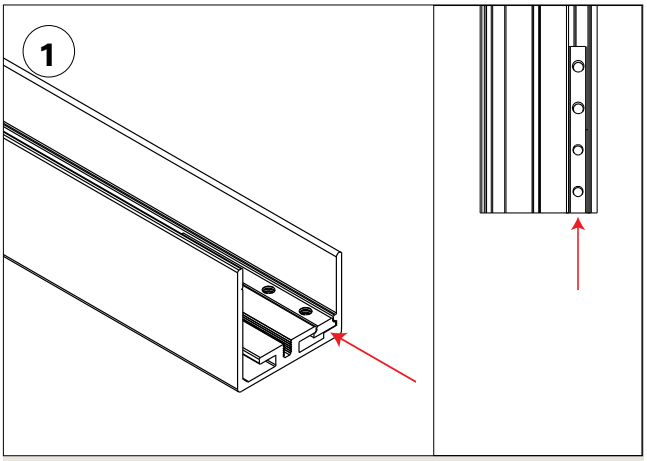


Slide the inline connector into the inline connector slot of the mounted run.

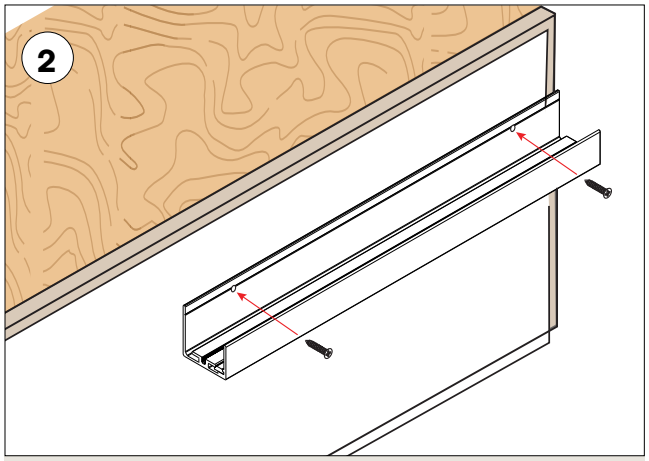

Mount the bracket on to the wall. Refer to **Steps 1 & 2 on pg3** to prepare bracket for wall mounting.

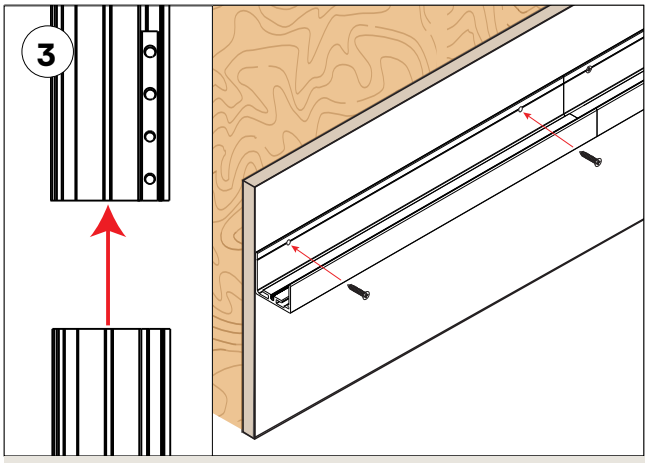

Mount the second bracket to the wall.

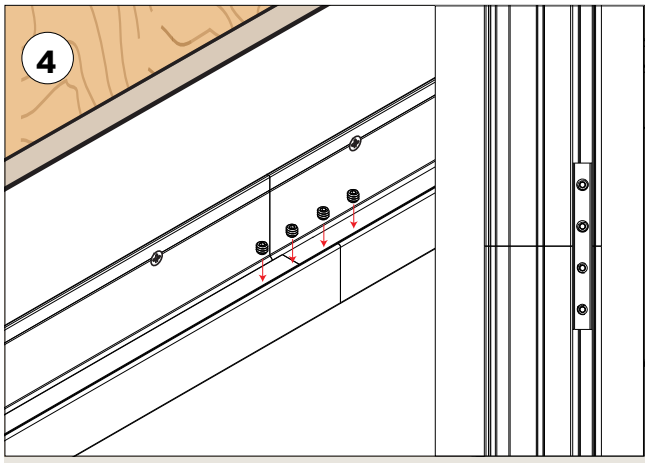

Complete by sliding the inline connector into position to join both brackets. Secure by fastening all set screws, then mount the fixture onto the mounting clips.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting