
DMX-US1

Accessories - Control

The DMX-US1 controller is a DMX based controller aimed at architectural lighting installations looking for simple and straight-forward DMX control options. The controller has been engineered to meet the needs of lighting designers, whilst providing a clean and user friendly panel.

This controller is capable of storing 3 scenes which can be recalled for programming use. It is an ideal solution for interior lighting, hotels and homes.


Dimensions

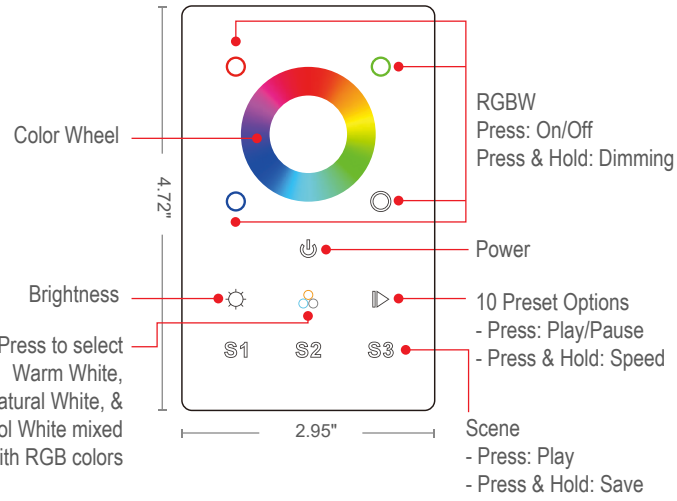

Features

- DMX512 Output
- Control one RGBW address
- Program 3 scenes, 1 zone
- 11 touch-sensitive buttons
- Touch-sensitive wheel allows for accurate color selection
- Sleek White glass design which sits 0.43" from the wall
- Live Control: Color, Dimmer and Speed
- Operating Temperature: 32°F to 104°F
- Dimensions: 2.95" x 4.72" x 0.43"
- Weight: 0.34 lbs
- Mounts to US sized junction boxes
- FCC, CE, ROHS Standards
- 5 year warranty

ZONE	DMX ADDRESS
1	1

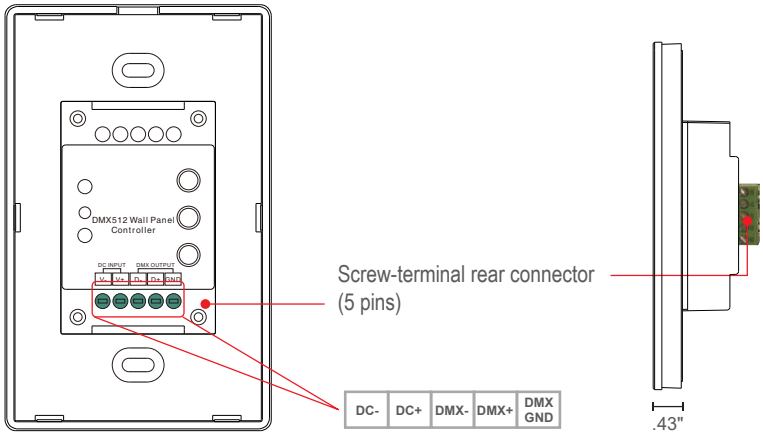

Compatible Power Supplies

See website for additional power supply options

QTM-eLED+DMX



QTM-DRIVE



QOM-eLED+DMX



QOM-DRIVE



QZ-DMX



© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | QTLlighting

Specification subject to change. Rev-02-27-24