
EXCELSIOR DL-12

12V MR16 35W Halogen/8W LED Down Light



DL-12 Shown in Bronze Texture Powder Coat Finish (BZT)

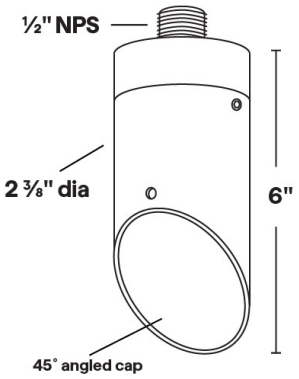

Dimensions: 2 3/8" dia. x 6"

- 45° angled lens cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 STEM LENGTH	5 FINISH
DL-12	A			

Sample Part Number: **DL-12-A-1-0-BK**

1 PRODUCT

DL-12	

2 MATERIAL

A	Aluminum

3 MOUNTING PLATE

1	Q-MT-25
2	Q-MT-27
3	Q-MT-11
4	Q-MT-21

4 STEM LENGTH

0	No Stem
3	3" Stem Length
6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length

5 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-22-26

EXCELSIOR DL-12

12V MR16 35W Halogen/8W LED Down Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Aluminum

3 MOUNTING PLATE

1/2" NPS

1	2	3	4
			
4/0 Round Mounting Plate	3/0 Round Mounting Plate	Surface Mount Kit	Surface Mount Canopy
Q-MT-25	Q-MT-27	Q-MT-11	Q-MT-21

4 FINISH

Eight Standard TGIC Free powder coat finishes

- Beige
- Black
- Black Texture
- Bronze
- Bronze Texture
- Black Bronze
- Silver
- White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-09-22-26

EXCELSIOR DL-12

12V MR16 35W Halogen/8W LED Down Light

ACCESSORIES - LENS

Holds up to one accessories

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16	MR16
	
EMERY ALLEN	EMERY ALLEN
1.0W, 3.0W, 5.0W, 7.0W, 8.0W	3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting