
EXCELSIOR DL-6

12V MR11 20W Halogen/2W LED Down Light



DL-6 Shown in Bronze Texture Powder Coat Finish (BZT)

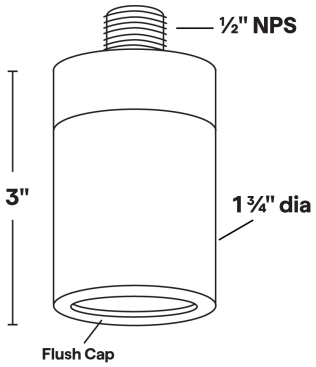

Dimensions: 1 3/4" dia. x 3"

- Flush lens cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20W Halogen/2W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU4 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 STEM LENGTH	5 FINISH
DL-6	A			

Sample Part Number: **DL-6-A-1-0-BK**

1 PRODUCT

DL-6	

2 MATERIAL

A	Aluminum

3 MOUNTING PLATE

1	Q-MT-25
2	Q-MT-27
3	Q-MT-11
4	Q-MT-21

4 STEM LENGTH

0	No Stem
3	3" Stem Length
6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length

5 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-07-24-26

EXCELSIOR DL-6

12V MR11 20W Halogen/2W LED Down Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Aluminum

3 MOUNTING PLATE

1/2" NPS

1	2	3	4
			
4/0 Round Mounting Plate	3/0 Round Mounting Plate	Surface Mount Kit	Surface Mount Canopy
Q-MT-25	Q-MT-27	Q-MT-11	Q-MT-21

4 FINISH

Eight Standard TGIC Free powder coat finishes

Beige
Black
Black Texture
Bronze
Bronze Texture
Black Bronze
Silver
White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-07-24-26

EXCELSIOR DL-6

12V MR11 20W Halogen/2W LED Down Light

ACCESSORIES - LENS

Holds up to one accessories

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR11-1	To order separately use AY-1-MR11-2	To order separately use AY-1-MR11-3	To order separately use AY-1-MR11-4	To order separately use AY-1-MR11-5	To order separately use AY-1-MR11-6

LAMPS

MR11 Halogen or LED; GU4 Bi Pin Porcelain
Maximum wattage: 20W Halogen/2W LED

MR11	MR11
	
EMERY ALLEN	EMERY ALLEN
1.5W	1.5W

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved