
EXCELSIOR PL-23

12V MR8 20W Halogen/3W LED Path Light



PL-23 Shown in Bronze Texture Powder Coat Finish (BZT)

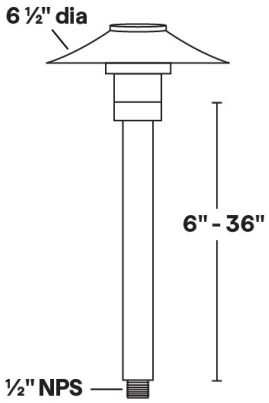

Dimensions: 6 1/2" dia. shade

- 6061 Marine Grade Aluminum, available in eight standard TGIC Free powder coat finishes
- Copper, available in two finishes.
- Stainless steel hardware.
- 6' of 18/2 low voltage cable supplied.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20W Halogen/3W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU4 Bi Pin Porcelain (also accepts G4 lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 SHADE TOP	4 STEM LENGTH	5 FINISH
PL-23				

Sample Part Number: **PL-23-A-D-12-BZT**

1 PRODUCT

PL-23

2 MATERIAL

A	Aluminum
B	Brass

3 SHADE TOP

S	Standard
T	Tall
D	Dome
C	Cone

4 STEM LENGTH

6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length
24	24" Stem Length
30	30" Stem Length
36	36" Stem Length

5 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White
DB	Dark Bronze
P	Polished

DB finish has longer lead time

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-07-30-26

EXCELSIOR PL-23

12V MR8 20W Halogen/3W LED Path Light

1 PRODUCT - DIMENSIONS



2 MATERIAL




Aluminum

Brass

5 FINISH

Eight Standard TGIC Free powder coat finishes

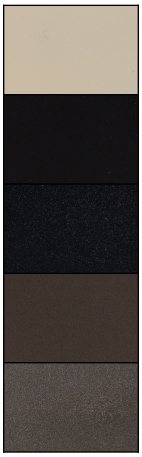

Beige

Black

Black Texture

Bronze

Bronze Texture



Black Bronze

Dark Bronze

Natural

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-07-30-26

EXCELSIOR PL-23

12V MR8 20W Halogen/3W LED Path Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

Q-MT-45



Ground Mount

Q-MT-6



Ground Mount

Q-MT-7



Ground Mount

LAMPS

MR8 Halogen or LED; GU4 Bi Pin Porcelain (also accepts G4 lamps)
Maximum wattage: 20W Halogen/3W LED

MR8



EMERY ALLEN

2.0W

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting